# PLOMB TOOL CO.

*Streamlined*

TOOLS

CATALOG NUMBER 19-R

FOURTH PRINTING

© BY PLOMB TOOL COMPANY

# Streamlined Tools

Automotive • Aviation • Railroad
Mining • Oil Country • Plumbing
Marine • Utilities

## GUARANTEE

Plomb's tools are forged from the finest steels, scientifically heat-treated. They are guaranteed to perform the work for which they are designed and intended to be used, and to last as long as is consistent with ordinary wear and tear. Any Plomb Tool Company product found defective in workmanship or material, and returned to the factory, charges prepaid, will, at our option, be replaced, or repaired, or credited at current prices.

## PAGE OMISSIONS

Pages 3-14, 20-23, 43, 44, 52 and 53 are not included, due to necessary revisions. The pages were not re-numbered consecutively, without omissions, because the page numbers in Plomb's price lists apply to the 19-R Catalog, First Printing, and it was desirable to have the same index apply, as completely as possible, to this Fourth Printing.

PLOMB TOOL COMPANY

*Main Office and Plant* *2209 Santa Fe Avenue, Los Angeles 54, California*

**Phone JEfferson 4181**

SEE PLOMB'S LATEST PRICE LIST FOR PRICES OF ALL CURRENTLY ACTIVE ITEMS

# Plomb Tool Company Catalog No. 19-R

## GENERAL INDEX


| Description | Page No. |
|---|---|
| Adaptors | 33, 36, 39 |
| Adjustable Wrenches | 63B |
| Adjuster, Valve | 59 |
| Aligning Punches | 68 |
| Attachments, Socket | 25-39B |
| Awls, Scratch | 70 |
| Axle Pullers | 73 |
| Ball Race Pullers | 75 |
| Bars | 61 |
| Battery Plier | 63 |
| Battery Terminal Puller | 67 |
| Bearing Pullers | 67, 74, 75 |
| Bending Bar | 61 |
| Blades, Feeler Gauge | 60 |
| Blocks, Dolly | 77 |
| Body and Fender Tools | 77-80 |
| Box and Open End Combination Wrenches | 50, 51 |
| Box Wrenches | 41, 42, 45-49, 57, 59, 67 |
| Boxes, Tool | 17-19, 75, 76 |
| Brake Gauges | 60 |
| Brake Spring Plier | 63 |
| Brake Tool | 67 |
| Brass Hammer | 78, 79 |
| Bumping Hammers | 78, 79 |
| Bushing Pullers | 75 |
| Cabinet Screwdrivers | 65 |
| Cabinets, Tool | 15-17 |
| Calkers | 71 |
| Cape Chisels | 68 |
| Carbon Scraper | 58 |
| Carburetor Jet Wrench | 59 |
| Ceiling Calker | 71 |
| Center Punches | 68 |
| Chests, Tool | 16, 17 |
| Chevrolet Tools | 59, 67 |
| Chisels | 68-70 |
| Cleaners, Ring and Guide | 58 |
| Cold Chisels | 69 |
| Combination Pliers | 62-63A |
| Combination Wrenches | 45, 50, 51 |
| Concrete Drills | 70 |
| Concrete Gads | 70 |
| Cone Pullers | 75 |
| Connecting Rod Sockets | 59 |
| Containers, Gauge | 61 |
| Crescent-Type Wrenches | 63B |
| Cross Point Screwdrivers | 66 |
| Crowfoot Wrenches | 29 |
| Cub ⅜" Socket Sets | 27 |
| Cutters, Rivet | 68 |
| Curved Nose Calking Iron | 71 |
| Deep Sockets | 26, 30, 34, 39A, 39B |
| Diagonal Pliers | 62 |
| Diamond Chisels | 68 |
| Diesel Wrenches | 56 |
| Dinging Hammers | 78, 79 |
| Dolly Blocks | 77 |
| Drag Link Screwdriver Sockets | 33, 59 |
| Drag Link Tool | 67 |
| Drift Punches | 69 |
| Drills, Star | 70 |
| Drive Plug | 38 |
| Duck Bill Plier | 63 |
| "Easy Out" Extractors | 57 |
| Electrical Wrenches | 56 |
| Electricians' Screwdrivers | 65 |
| Ell Handles | 32, 35 |
| Engine Tools | 58, 59, 67 |
| Engineers' Wrenches | 54-56 |
| Expander, Tubing | 71 |
| Extensions, Socket | 25, 29, 33, 35, 38, 39-39B |
| Extractors, Screw | 57 |
| Feeler Gauges | 60 |
| Fender and Body Tools | 77-80 |
| Finishing Hammers | 78, 79 |
| Flare Nut Wrenches | 56 |
| Flex Handles | 25, 28, 32, 33, 35, 38, 39 |
| Floor Chisels | 70 |
| Ford Tools | 59, 67, 76 |
| Gads, Concrete | 70 |
| Garage Bars | 61 |
| Gas Plier | 63A |
| Gasket Calkers | 71 |
| Gasket Scraper | 58 |
| Gauges, Thickness | 60 |
| Gear Pullers | 73-75 |
| Generator Pullers | 75 |
| Go and No-Go Gauges | 60 |
| Grease Bar | 61 |
| Groove Tools, Piston Ring | 58 |
| Guide Cleaner, Valve | 58 |
| Hacksaws | 61 |
| Half-Moon Wrenches | 57 |
| Hammer Handles | 80 |
| Hammer Pullers, Slide | 73 |
| Hammers | 78-80 |
| Handles, Socket | 25, 28, 29, 32, 33, 35, 38, 39 |
| Hinge Handles | 25, 28, 32, 33, 35, 38, 39 |
| Holders, Feeler Gauge | 60, 61 |
| Hooks, Packing | 70 |
| Ignition Gauges | 60 |
| Ignition Plier | 63 |
| Ignition Wrenches | 56 |
| Impact Sockets | 40 |
| Industrial Tools | 37-45 |
| Irons, Yarning | 70, 71 |
| Kits, Leatherette | 19 |
| L Handles | 32, 35 |
| Lead-Picking Tools | 70 |
| Leatherette Rolls | 19 |
| Lifter, Valve | 59 |
| Linemen's Pliers | 63A |
| Lining Up Punches | 68, 69 |
| Magnetic Trim Hammer | 78, 79 |
| Mallet, Rubber | 78, 79 |
| Midget Plier | 63 |
| Midget Socket Sets | 24 |
| Midget Wrenches | 56 |
| Mobile Tool Cabinets | 15 |
| Muffler Remover | 67 |
| Needle Nose Plier | 63 |
| Nipple Wrench | 70 |
| Nuplaflex Hammers | 80 |
| Obstruction Wrenches | 56, 57, 59 |
| Offset Box Wrenches | 48, 49 |
| Offset Calkers | 71 |
| Offset Screwdrivers | 66, 68 |
| Offset Yarning Irons | 71 |
| Open End and Box Combination Wrenches | 50, 51 |
| Open End Wrenches | 54-57 |
| Overhead Valve Adjuster | 59 |
| Packing Hooks | 70 |
| Pecking Hammers | 78, 79 |
| Phillips Screwdriver Sockets | 26, 28 |
| Phillips Screwdrivers | 66 |
| Picking Tools, Lead | 70 |
| Pin Handles | 25, 28, 32, 35 |
| Pin Punches | 68, 69 |
| Pinch Bars | 61 |
| Pinion Puller Bar | 67 |
| Pipe Extractors | 57 |
| Pipe Nipple Wrench | 70 |
| Pipe Wrenches | 63B |
| Piston Ring Tools | 58 |
| Plastic-Tip Hammers | 78-80 |
| Pliers | 62-63A |
| Plugging Chisel | 70 |
| Plug, Drive | 38 |
| Plumbing Tools | 70-72 |
| Pneumatic Wrench Sockets | 39A-40 |
| Pony Calkers | 71 |
| Power Sockets | 39A-40 |
| Prick Punches | 68 |
| Production Sockets | 39A-40 |
| Pry Bars | 61 |
| Pullers | 58, 67, 72-76 |
| Pulley Pullers | 74 |
| Punches | 67-69 |
| Racks, Socket | 17 |
| Ratchet Adaptor | 30 |
| Ratcheting Attachment | 30 |
| Ratchets | 25, 28, 32, 35, 38 |
| Rim Wrench | 58 |
| Ring Tools, Piston | 58 |
| Ripping Bars | 61 |
| Rivet Cutters | 68 |
| Rivet Punches | 68, 69 |
| Rolling Head Bars | 61 |
| Rolling Tool Cabinets | 15 |
| Rolls, Leatherette | 19 |
| Round Nose Chisels | 68 |
| Rubber Mallet | 78, 79 |
| Saws, Hack | 61 |
| Scraper, Carbon | 58 |
| Scraper, Gasket | 58 |
| Scratch Awls | 70 |
| Screwdriver Sockets | 26, 28, 33, 59, 66 |
| Screwdrivers | 64-66, 68 |
| Screw Extractors | 57 |
| Sets | |
| Gauge | 60, 61 |
| Punch and Chisel | 69 |
| Screwdriver | 66 |
| Socket (See Socket Sets) | |
| Tool | 2, 72 |
| Wrench | 47, 49, 51, 55, 57 |
| Shock Arm Tool | 67 |
| Side Cut Pliers | 62-63A |
| Single Jaw Puller | 73 |
| Slide Hammer Pullers | 73 |
| Sliding Bar Handles | 25, 28, 32, 35, 38, 39 |
| Slip Joint Pliers | 62-63A |
| Slugging Wrenches | 42 |
| Socket Attachments | 25-39B |
| Socket Racks | 17 |
| Socket Sets | |
| ¼", ⅜", & ½" Drive | 24 |
| ¼" Drive | 24 |
| ⅜" Drive | 27 |
| ½" Drive | 31 |
| ¾" Drive | 37 |
| 1" Drive | 37 |
| Sockets | |
| ¼" Drive | 26 |
| ⅜" Drive | 28, 30, 39A, 66 |
| ½" Drive | 33, 34, 39B, 59 |
| ¾" Drive | 36, 40 |
| 1" Drive | 39, 40 |
| Soft-Tipped Hammers | 78-80 |
| Soil Pipe Chisels | 70 |
| Spark Plug Sockets | 30, 34 |
| Speeder Handles | 25, 29, 33 |
| Spring Removing Plier | 63 |
| Spring Tester | 67 |
| Spring Yarning Irons | 70 |
| Spud End and Box Combination Wrenches | 45 |
| Standard Sizes | Opp. 80 |
| Star Drills | 70 |
| Starter Wrench | 67 |
| Starting Punches | 68, 69 |
| Step-Cut Gauges | 60 |
| Stillson Wrenches | 63B |
| Striking Wrenches | 41 |
| Stubby Wrenches | 48, 49 |
| Stud Pullers | 58 |
| Tappet Wrenches | 57 |
| Telephone Plier | 63A |
| Tension Wrenches | 32 |
| Terminal Puller | 67 |
| Tester, Spring | 67 |
| Thickness Gauges | 60 |
| Tool Boxes, Cabinets & Chests | 15-19, 75, 76 |
| Tool Sets | 2, 72 |
| Toolmobiles | 15 |
| Torque Wrenches | 32 |
| Trim Hammer, Magnetic | 78, 79 |
| Tubing Expander | 71 |
| Tubing Wrenches | 56 |
| Two-in-One Wrenches | 50, 51 |
| Universal Joints | 25, 28, 33, 34, 36, 39A, 39B |
| Universal Pliers | 63A |
| Universal Sockets | 30, 34, 39A, 39B |
| Upholstery Hammer | 78, 79 |
| Valve Tools | 58, 59, 67 |
| Veterans' Tool Sets | 2 |
| Water Main Calkers | 71 |
| Water Pump Pliers | 63, 63A |
| Wedges, Stud Puller | 58 |
| Wheel Nut Wrench | 58 |
| Wheel Pullers | 75, 76 |
| Wood Chisels | 70 |
| Wrecking Bars | 61 |
| Wrench Pliers | 63 |
| Wrench Sets | 47, 49, 51, 55, 57 |
| Wrenches | |
| Adjustable | 63B |
| Box | 41-49, 57, 59, 67 |
| Box and Open End Combination | 50, 51 |
| Box and Spud End Combination | 45 |
| Box, Heavy Duty | 41-45 |
| Carburetor Jet | 59 |
| Combination | 45, 50, 51 |
| Crescent-Type | 63B |
| Crowfoot | 29 |
| Diesel | 56 |
| Electrical | 56 |
| Engineers' | 54-56 |
| Flare Nut | 56 |
| Ignition | 56 |
| Midget | 56 |
| Obstruction | 56, 57, 59 |
| Offset Box | 48, 49 |
| Open End | 54-57 |
| Open End and Box Combination | 50, 51 |
| Pipe | 63B |
| Rim | 58 |
| Slugging | 42 |
| Striking | 41 |
| Stubby | 48, 49 |
| Tappet | 57 |
| Torque | 32 |
| Tubing | 56 |
| Yarning Irons | 70, 71 |


## CATALOG NUMBER INDEX


| Catalog No. | Page No. |
|---|---|
| 000A to 000J | 60, 61 |
| 0015 to 040 | 60 |
| 004/6 to 011/13 | 60 |
| 033 | 71 |
| 1 to 6 | 69, 70 |
| 8 | 61 |
| 13 to 33 | 68-71 |
| 033 | 71 |
| 35, 36 | 66, 68 |
| 37 to 96 | 68-70 |
| 100 | 65 |
| 100HR | 19 |
| 108 to 145 | 70, 71 |
| 201 to 280 | 62-63A |
| 344 to 360 | 61 |
| 704 to 824 | 63B |
| 1036 to 1069 | 45 |
| 1100 to 1164 | 46, 47 |
| 1200 to 1246 | 50, 51 |
| 1308H to 1448B | 79, 80 |
| 1452 to 1509 | 77 |
| 1725 to 1730 | 57 |
| 2006 | 67 |
| 2110 to 2135 | 61 |
| 2151 | 58 |
| 2301 | 67 |
| 2311 to 2337 | 58 |
| 2370 | 70 |
| 2401 to 2424 | 19 |
| 2613 to 2650 | 45 |
| 2613SW to 2650SW | 41 |
| 3000 to 3070 | 54, 55 |
| 3210 to 3736 | 56, 57 |
| 4000 | 72 |
| 4001 to 4030 | 74-76 |
| 4041, 4050 | 67 |
| 4056 to 4071 | 73, 74 |
| 4080 | 67 |
| 4515 to 4534 | 58 |
| 4700 to 4785 | 24-26 |
| 4795 | 19 |
| 4912 to 5249 | 27-30 |
| 5253, 5254 | 33 |
| 5259 to 5285 | 28-30 |
| 5295 to 5297 | 17, 18 |
| 5300PH to 5403 | 31-34 |
| 5405 | 67 |
| 5412S to 5446 | 33, 34 |
| 5447 | 30 |
| 5449 to 5486 | 32-34 |
| 5495 to 5497 | 17, 18 |
| 5500 to 5686 | 35-37 |
| 5695 | 18 |
| 5700 to 5885 | 36-39 |
| 5894 | 18 |
| 6509 | 67 |
| 6522 to 6539 | 59 |
| 6545, 6601 | 67 |
| 6734 | 59 |
| 7014 to 7479 | 39A, 39B |
| 07512 to 07523 | 40 |
| 8100 to 8185 | 48, 49 |
| 9500A to 9529 | 57 |
| 9604 to 9843 | 64-66 |
| 9900 | 2, 72 |
| 9969 to 9998 | 15-17 |
| 9980AA | 24 |
| 07512 to 07523 | 40 |
| 10016 to 10035 | 40 |
| USN221 to USN356 | 42 |



*This Catalog Designed by*
WALLACE G. GREGORY & CO.
*Los Angeles*

*Lithographed in U. S. A. by*
WESTERN LITHOGRAPH CO.
*Los Angeles*

# PLUMB TOOL COMPANY

*Streamlined Tools*

## TOOL SET NO. 9900A FOR WAR VETERANS

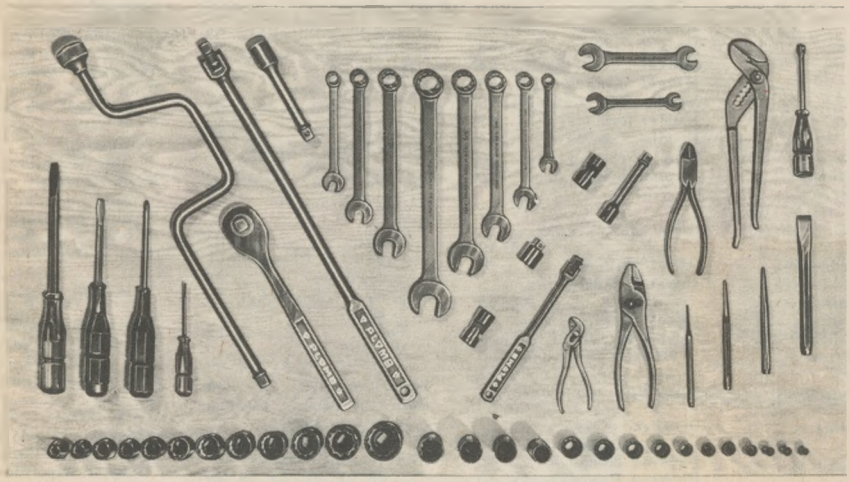

| No. | Description |
|---|---|
| | **Punches and Chisel** |
| 41-3/8 | Center Punch, 4-7/8" Long |
| 47-5/16 x1/8 | Pin Punch, 5-1/4" Long |
| 50-5/16 | Starting Punch, 1/8" Point |
| 86A-1/2 | Cold Chisel, 5/8" Cut |
| | **Pliers** |
| 206 | Diagonal Cutting, 6" Long |
| 235 | Slip Joint Ignition, 4-1/2" Long |
| 240 | Slip Joint Water Pump, 9-1/2" |
| 276 | Combination Slip Joint, 6" |
| | **Wrenches** |
| 1212 | Comb. Box & Open End, 3/8" |
| 1214 | Comb. Box & Open End, 7/16" |
| 1216 | Comb. Box & Open End, 1/2" |
| 1218 | Comb. Box & Open End, 9/16" |
| 1220 | Comb. Box & Open End, 5/8" |
| 1222 | Comb. Box & Open End, 11/16" |
| 1224 | Comb. Box & Open End, 3/4" |
| 1228 | Comb. Box & Open End, 7/8" |
| 3021 | Open End, 3/8" and 7/16" |
| 3026 | Open End, 1/2" and 9/16" |
| | **1/4" Drive Sockets and Attachment** |
| 4708 | Socket, 6-Point, 1/4" Opening |
| 4708S | Socket, 8-Point, 1/4" Opening |
| 4710 | Socket, 6-Point, 5/16" Opening |
| 4710S | Socket, 8-Point, 5/16" Opening |
| 4769 | Spintype Handle, 6" Long |
| | **3/8" Drive Sockets and Attachments** |
| 5200N | Socket Set (See Page 27) |
| 5254 | Adapter, 1/2" Female, 3/8" Male |
| 5275 | Univ. Socket, 12-Pt., 1/2" Op. |
| 5276 | Univ. Socket, 12-Pt., 9/16" Op. |
| | **1/2" Drive Sockets and Attachments** |
| 5400NR | Socket Set (See Page 31) |
| 5343 | Deep Socket, 12-Point, 5/8" Op. |
| 5345 | Deep Socket, 12-Point, 3/4" Op. |
| 5347 | Deep Socket, 12-Point, 13/16" Op. |
| 5348 | Deep Socket, 12-Point, 7/8" Op. |
| 5436 | Socket, 12-Point, 1-1/8" Op. |
| 5440 | Socket, 12-Point, 1-1/4" Op. |
| 5470 | Universal Joint |
| 5480 | Speed Handle, 18" Long |
| | **Screwdrivers** |
| 9622 | 5-1/4" Long, 1/8" Bit |
| 9704 | 9" Long, 9/32" Bit |
| 9784 | 8-7/8" Long, Phillips #2 Bit |
| 9806 | 10-1/2" Long, 11/32" Bit |

## MASTER TOOL SET NO. 9900B FOR WAR VETERANS

| No. | Description |
|---|---|
| | **Feeler Gauge Set and Offset Screwdriver** |
| 000A | Nine Gauges, in Holder |
| 36-1/4 | Offset Screwdriver, 1/4" Bits |
| | **Punches and Chisels** |
| 41-3/8 | Center Punch, 4-7/8" Long |
| 47-5/16 x1/8 | Pin Punch, 5-1/4" Long |
| 47-7/16 x7/32 | Pin Punch, 6-5/8" Long |
| 50-3/8 | Starting Punch, 3/16" Point |
| 86A-7/16 | Cold Chisel, 1/2" Cut |
| 86A-5/8 | Cold Chisel, 3/4" Cut |
| 96-5/8 | Drift Punch, 5/16" Point |
| | **Pliers and Adjustable Wrench** |
| 235 | Ignition Plier, 4-1/2" Long |
| 240 | Water Pump Plier, 9-1/2" Long |
| 708 | Adjustable Wrench, 8" Long |
| | **Box and Combination Wrenches** |
| 1120 | Box, 5/16" and 3/8" |
| 1125 | Box, 7/16" and 1/2" |
| 1126 | Box, 1/2" and 9/16" |
| 1130 | Box, 9/16" and 5/8" |
| 1135 | Box, 11/16" and 3/4" |
| 1140 | Box, 13/16" and 7/8" |
| 1145 | Box, 15/16" and 1" |
| 1150 | Box, 1-1/16" and 1-1/8" |
| 1212 | Comb. Box & Open End, 3/8" |
| 1214 | Comb. Box & Open End, 7/16" |
| 1216 | Comb. Box & Open End, 1/2" |
| 1218 | Comb. Box & Open End, 9/16" |
| 1220 | Comb. Box & Open End, 5/8" |
| 1222 | Comb. Box & Open End, 11/16" |
| 1224 | Comb. Box & Open End, 3/4" |
| 1226 | Comb. Box & Open End, 13/16" |
| 1228 | Comb. Box & Open End, 7/8" |
| 1230 | Comb. Box & Open End, 15/16" |
| 1232 | Comb. Box & Open End, 1" |
| | **Hammer, Bar and Scraper** |
| 1370 | Plastic Tip Hammer, 1/2 Pound |
| 2130 | Rolling Head Bar, 18" Long |
| 2337 | Flexible Carbon Scraper |
| | **Open End and Tappet Wrenches** |
| 3018 | Open End, 1/4" and 5/16" |
| 3021 | Open End, 3/8" and 7/16" |
| 3026 | Open End, 1/2" and 9/16" |
| 3030 | Open End, 9/16" and 5/8" |
| 3035 | Open End, 11/16" and 3/4" |
| 3040 | Open End, 13/16" and 7/8" |
| 3210 | Midget Open End, 13/64" & 15/64" |
| 3215 | Midget Open End, 7/32" & 1/4" |
| 3220 | Midget Open End, 9/32" & 5/16" |
| 3225 | Midget Open End, 11/32" & 3/8" |
| 3425 | Tappet, 7/16" and 1/2" |
| 3426 | Tappet, 1/2" and 9/16" |
| | **1/4" Drive Sockets and Attachments** |
| 4700B | Socket Set (See Page 24) |
| | **3/8" Drive Sockets and Attachments** |
| 5200NR | Socket Set (See Page 27) |
| 5270 | Universal Joint |
| 5280 | Speed Handle, 18" Long |
| | **1/2" Drive Sockets and Attachments** |
| 5400NR | Socket Set (See Page 31) |
| 5340 | Deep Socket, 12-Point, 1/2" Op. |
| 5341 | Deep Socket, 12-Point, 9/16" Op. |
| 5343 | Deep Socket, 12-Point, 5/8" Op. |
| 5344 | Deep Socket, 12-Point, 11/16" Op. |
| 5345 | Deep Socket, 12-Point, 3/4" Op. |
| 5347 | Deep Socket, 12-Point, 13/16" Op. |
| 5348 | Deep Socket, 12-Point, 7/8" Op. |
| 5444 | Screwdriver Socket, 3/4" Bit |
| 5470 | Universal Joint |
| 5480 | Speed Handle, 18" Long |
| | **3/4" Drive Sockets and Attachments** |
| 5534 | Socket, 12-Point, 1-1/16" Op. |
| 5536 | Socket, 12-Point, 1-1/8" Op. |
| 5540 | Socket, 12-Point, 1-1/4" Op. |
| 5542 | Socket, 12-Point, 1-5/16" Op. |
| 5544 | Socket, 12-Point, 1-3/8" Op. |
| 5546 | Socket, 12-Point, 1-7/16" Op. |
| 5548 | Socket, 12-Point, 1-1/2" Op. |
| 5661 | Extension, 8" Long |
| 5685 | Sliding Bar Handle, 18" Long |
| | **Screwdrivers and Screw Extractor** |
| 9651 | 2-7/8" Long, 1/4" Bit |
| 9784 | 8-7/8" Long, Phillips #2 Bit |
| 9804 | 8" Long, 9/32" Bit |
| 9806 | 10-1/2" Long, 11/32" Bit |
| 9822 | 5-1/4" Long, 1/8" Bit |
| 9832 | 7-1/2" Long, 3/16" Bit |
| 9522 | Screw Extractor, 3/16" Drill |

**The above sets cannot be shipped complete from factory but can be assembled by distributor.**

Pages 2-14 omitted. See note opposite Page 1.

# COMPLETE TOOLMOBILE

## *"The Modern Mobile Work Bench"*

Here's the finest tool box your money can buy. It's convenient and impressive—tops for efficient operation. One piece construction with all parts joined by spot welding. Chest 29½" high without castors or piston rack. 28" wide, 17¾" from front to back. Lustrous chinese red enamel finish. Weight complete without tools, 119 pounds, boxed for shipment. Strong as a steel safe. A Plomb Toolmobile saves hours of time and effort. The most popular roller box on the market.

No. 9969-1 TOOLMOBILE with Piston Rack

No. 9969-1 TOOLMOBILE Open

### SPECIFICATIONS

(1) Bolted on rack, has 16 holes and 8 slots for pistons, valves, and tools.
(2) Large working surface 17¾" x 28"
(3) Barrel lock with locking bar secures everything with one key. Locking bar drops in slot at left out of way when chest is not in use.
(4) Side rail on each side for socket rack.
(5) Drawer 3¾" deep, complete with adjustable divider.
(6) Drawer—5⅞" deep, with adjustable divider.
(7) Drawer—6⅝" deep. Solid bottom.
(8) Large compartment 10" high. Front panel slides under drawer above.
(9) Ventilators on both sides.
(10) Rounded Streamlined corners.
(11) Large composition, ball bearing castors. Front castors with foot operated brakes.
(12) 6" x 6" steel reinforcement plate under top for attaching light bolt on vise.
(13) All corners reinforced on inside for added strength and rigidity.
(14) All drawers run on bearing rollers.

**9969-7** Piston Rack for Toolmobile. Weight, 6 lbs.

---

**9969-4** Toolmobile less Piston Rack.

PLUMB TOOL COMPANY

*Streamlined Tools*

# MODERN TOOL BOXES
## For All Purposes

### No. 9998—Master Tool Chest

Folding handles. Spring clips inside lid. Finished in brilliant Chinese red. Will hold shape with full load.

Weight, 77 lbs. Outside dimensions: 12" wide, 26½" long, 20½" high. Top compartment 7½" deep. Top drawer 1½" deep, with compartment for small sockets. Second drawer 1½" deep, with two adjustable partitions. Third drawer 3¼" deep, with two adjustable partitions. Bottom drawer 3½" deep, with two movable partitions.

Front slides under bottom drawer. With lid closed, front covers drawers, and is locked with spring controlled bolts. One lock secures everything.

**No. 9998**—Master Chest, complete as illustrated.

MASTER TOOL CHEST No. 9998

### No. 9990—Master Tool Chest

The Tool Chest you have longed for. Streamlined, deluxe. As modern as young ideas. Smooth contours, rounded edges. Finished in brilliant Chinese Red.

Overall dimensions 11¼" wide, 12¾" deep, 24½" long, wt. 37 lbs. Cantilever tray in top swings up with lid and is partitioned for small tools. Drawers run with finger tip ease.
One padlock secures everything.

MASTER TOOL CHEST No. 9990

PREFERRED BY MEN WHO EARN THEIR LIVING WITH TOOLS

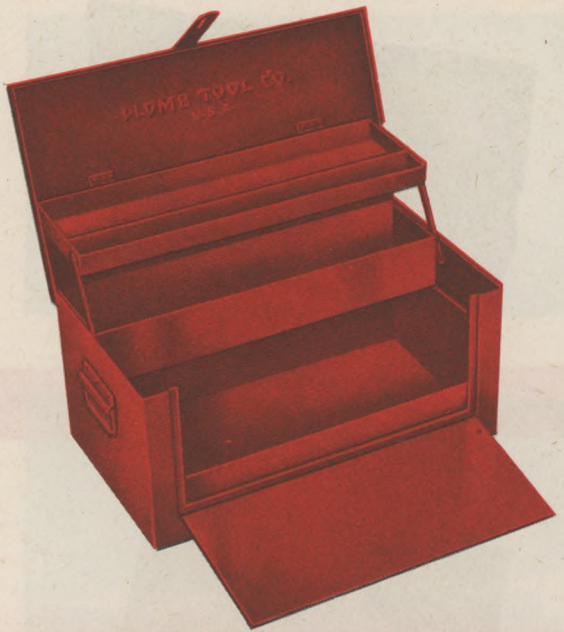


No. 9989

## No. 9989--Master Tool Chest

Made of sheet steel, welded and riveted; dark red baked enamel finish. Hinged tray swings up with lid. Removable tray gives easy access to large interior.

Overall dimensions: 9" deep, 11½" wide, 20½" long. Hinged tray 1¼" deep, 5½" wide, 19" long. Front tray 1½" deep, 5½" wide, 19" long. Bottom comp. 6" deep, 11" wide, 20" long. Fixed tray in top space 2½" deep, 4¾" wide, 20" long. Each tray and bottom compartment have separate section for sockets or small tools. Heavy hasp fits over staple on hinged front to lock chest securely. Strong folding handles. Weight, empty, 20 lbs. Shipping wt., 22 lbs.

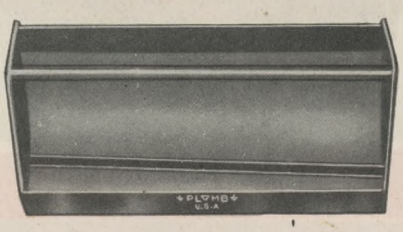


No. 9920

## * No. 9920—Handy Tool Tray

TEMPORARILY DISCONTINUED

9" wide, 19" long, 5½" deep under handle. Side compartment for sockets, small tools, etc. Weight, 4 lbs.

## No. 9980--Utility Box

22¼" long, 9" wide, 6½" high, with drop front and drop handles at each end. Dark red wrinkle finish. Heavy gauge steel. Weight empty, 11 lbs.

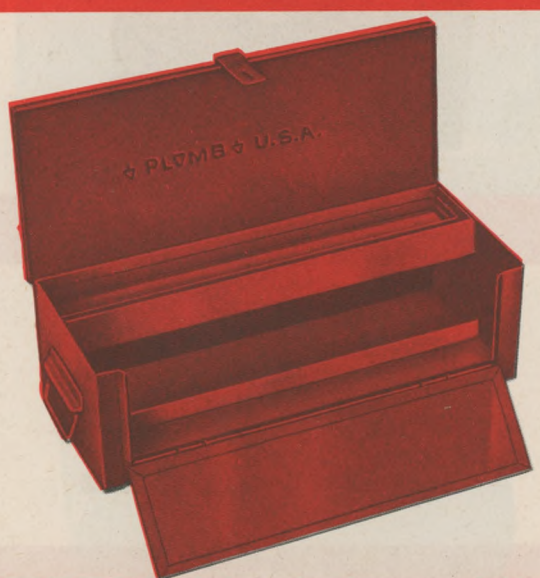


No. 9980

## Socket Racks

Made with clip on back, which slips over edge of box or partition. Can be carried on side of Tote Tray or can be put in a convenient place on wall or bench. Sockets fit firmly on rack. Made of heavy sheet steel, dark red baked enamel finish.

**No. 5297**—Cub Socket Rack, 18¼" long; has 17 clips for sockets with ⅜" square drives.

**No. 5497**—Standard Socket Rack, 18½" long; has 17 clips for sockets with ½" square drives.



No. 5297-5497

## No. 5894—Extra-Heavy-Duty Box

5" deep, 8¼" wide and 30" long, inside dimensions, to fit the Extra-Heavy-Duty handles and sockets described on page 52. Also used for large Heavy-Duty sets, with ¾" square drive, especially with the larger sockets. Made extra-heavy throughout, welded, riveted and strongly reinforced. Weight, 28 lbs.

No. 5894

## No. 5695—Heavy-Duty Tool Box

For Heavy-Duty Socket Sets with ¾" drive. Lid reinforced with steel cross-ribs. Handle, on top of lid, folds flush into recess. Three compartments, as shown, just right for heavy-duty sockets and handles. Double-hinged; locks with two spring hasps. 3¾" deep, 8" wide, 22½" long, inside measurements; weight, 8¼ lbs.

No. 5695

## No. 5495—Standard Tool Box

A heavy-gauge steel box with socket compartment lengthwise of box,, and compartment at front for extra sockets, cotter keys, small tools, etc. Clips inside top for speeder handle. Hooked staple holds cover down tight. Handle folds out of way when not in use. 1¾" deep, 8¼" wide, 19" long. Red baked enamel finish. Wt. 5¼ lbs.

No. 5495

## No. 5496—Box 5495 and Socket Rack 5497

## No. 5295—Cub Tool Box

A convenient small box, 1½" deep, 4¼" wide, 18½" long. Handy for trouble-shooting, as it is a convenient size to carry. Wt. 2½ lbs.

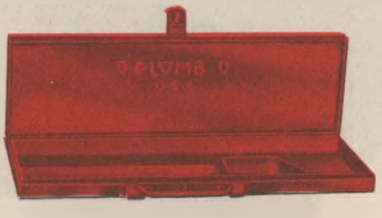

No. 5295

## No. 5296—Box 5295 and Socket Rack 5297

Pages 20-23 omitted. See note opposite Page 1.

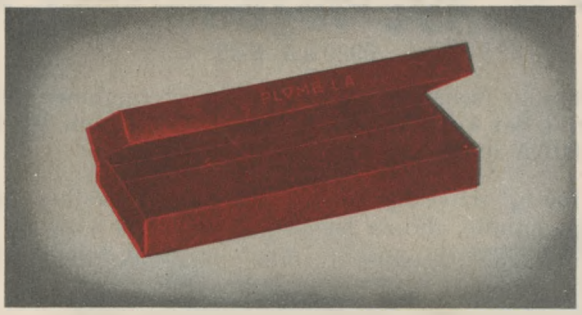

No. 4795

## No. 4795--Midget Tool Box

Just the box to hold your Plomb Midget Tools. A sturdy steel box 6-1/2" long by 2-5/8" wide by 1" deep. Wt. 1 lb. Finished in a brilliant Chinese Red. It will help you keep your smaller tools in orderly array.

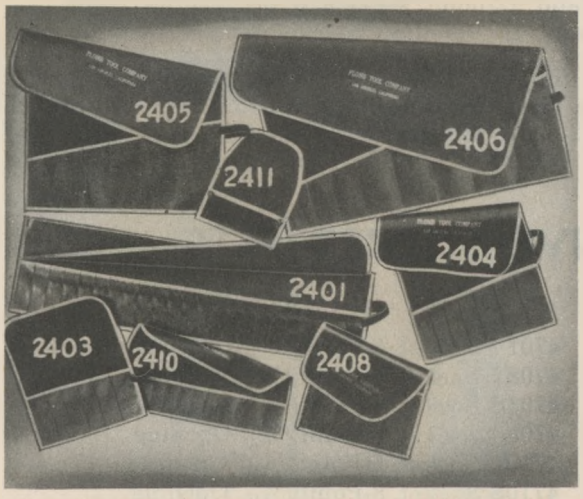


TOOL ROLLS

### Leatherette Rolls for Tool Kits

Made of heavy first-grade leatherette, with strongly stitched seams and bound edges. Handsome in appearance, black trimmed with silver. No. 2411 has snaps, and all others have heavy woven tie strings.

| Roll No. | Dimensions Laid Flat | No. of Pockets |
|---|---|---|
| *2401 | 8"x26" | 23 |
| 2402 | 13¼"x15" | 12 |
| 2403 | 10"x8¾" | 6 |
| 2404 | 16½"x10½" | 7 |
| 2405 | 17⅞"x14¾" | 6 |
| 2406 | 21⅝"x21¼" | 8 |
| 2408 | 13¾"x8½" | 4 |
| 2410 | 8⅛"x12⅝" | 10 |
| **2411 | 8¼"x6½" | 5 |
| 2413 | 25⅜"x25½" | 13 |

*Flap is extra piece, stitched on at top.

**Equipped with snaps instead of tie strings.

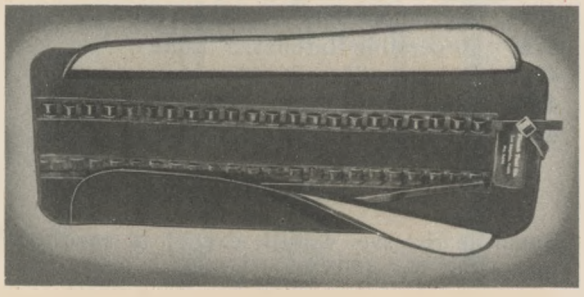

* No. 2424
*Temporarily discontinued

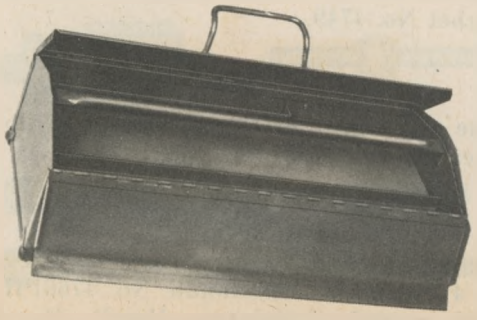

No. 100HR

### No. 100HR—Hip-Roof Tool Box

Handy for taking tools to job. Tote tray, which fits inside top, has socket compartment 13½" long and full-length compartment 2" wide. Box is 7⅜"x8½"x 21". Two handles hold box shut while carrying. Finish is red.

# COMBINATION ¼", ⅜" AND ½" SQ. DRIVE SOCKET SET

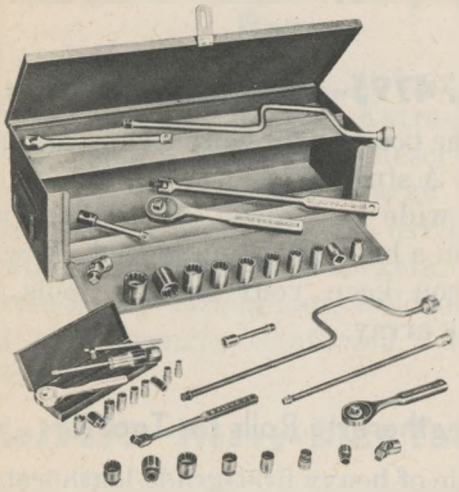

9980AA

### 9980 AA SET

This popular basic three-drive socket set combines Plomb's ¼" Drive Set 4700B, ⅜" Drive Set 5200AA and ½" Drive Set 5400AA in Tool Chest 9980.

Items for ¼" drive include a metal box, reversible ratchet, spintype handle, sliding bar, 6-point sockets with 7/32", ¼", 9/32", 5/16", 11/32", ⅜" and 7/16" openings, and 8-point sockets with ¼" and 5/16" openings.

Items for ⅜" drive include a reversible ratchet, hinge handle, speed handle, 3½" and 12" extensions, universal joint, and 12-point sockets with ⅜", 7/16", ½", 9/16", ⅝", 11/16" and ¾" openings.

Items for ½" drive include a reversible ratchet, hinge handle, speed handle, 5" and 10" extensions, universal joint, and 12-point sockets with 7/16", ½", 9/16", ⅝", 11/16", ¾", 13/16", ⅞", 15/16" and 1" openings.

# ¼" SQUARE DRIVE SOCKET SETS

Here are five complete sets of handy, midget tools, designed for all kinds of light work where small nuts and bolts must be turned. All sets include a useful selection of basic tools to which you can add others as your needs require.

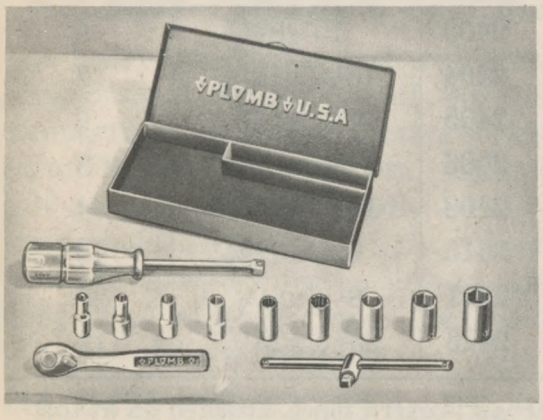


4700B

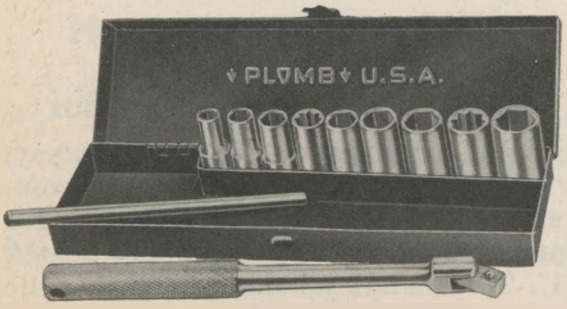


4700F

### 4700B SET

| | |
|---|---|
| **4707** | Socket, 6-Point, 7/32" Opening |
| **4708** | Socket, 6-Point, ¼" Opening |
| **4708S** | Socket, 8-Point, ¼" Opening |
| **4709** | Socket, 6-Point, 9/32" Opening |
| **4710** | Socket, 6-Point, 5/16" Opening |
| **4710S** | Socket, 8-Point, 5/16" Opening |
| **4711** | Socket, 6-Point, 11/32" Opening |
| **4712** | Socket, 6-Point, ⅜" Opening |
| **4714** | Socket, 6-Point, 7/16" Opening |
| **4749** | Reversible Ratchet, 5" Long |
| **4769** | Spintype Handle, 6" Long |
| **4785** | Sliding Bar Handle, 4½" Long |
| **4795** | Steel Box, 2⅝"x6½"x1" |

### 4700BC SET

Same as Set No. 4700B, except in cardboard box instead of No. 4795 steel box.

### 4700A SET

Same as Set No. 4700B, except without Reversible Ratchet No. 4749.

### 4700AC SET

Same as Set No. 4700A, except in cardboard box instead of No. 4795 steel box.

### 4700F SET

Same as Set No. 4700A, except 5⅜" Hinge Handle No. 4766 and 4" Pin Handle No. 4766PH are provided instead of Spintype Handle No. 4769 and Sliding Bar Handle No. 4785.

# Mighty Midget Series—¼" Drive Square Drive

## MIDGET RATCHET
(Regular) No. 4749

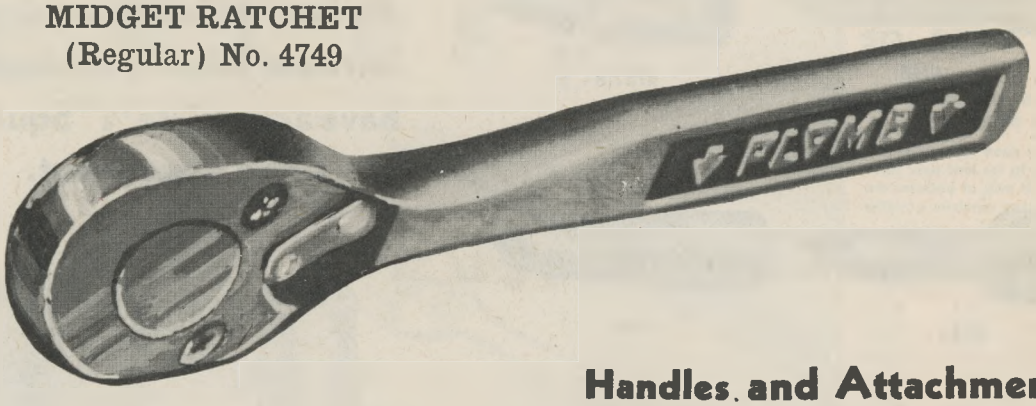


## Handles and Attachments

| Cat. No. | Description | Overall Length |
|---|---|---|
| 4749 | Standard Rev. Ratchet | 4¾" |
| 4760 | Extension | 3½" |
| 4761 | Extension | 6" |
| 4763 | Extension | 14" |
| 4766 | Hinge Handle | 5½" |
| 4766PH | Pin Handle | 4" |
| 4767 | Stub Handle—Pyroxylin Grip | 2 5/32" |
| 4769 | Spin Type Handle " " | 6" |
| 4770 | Universal Joint | 1 7/32" |
| 4780 | Speed Handle | 15¾" |
| 4785 | Sliding Bar Handle | 4½" |

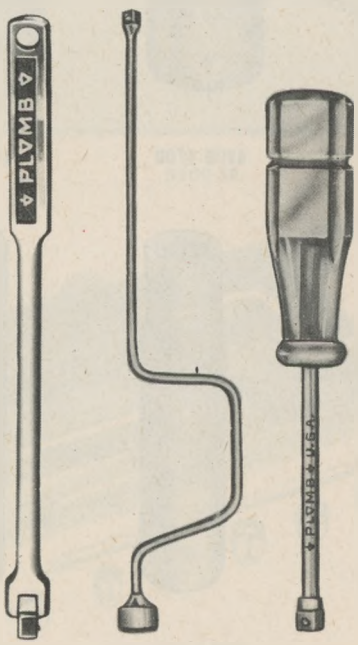


4766 4780 4769

## PARTS FOR 4749 RATCHET

| | | | |
|---|---|---|---|
| | | 4749H | Cover Screw |
| 4749C | Cover | 4749R | Rev. Ass'bly. |
| 4749DL | Dog, L. | 4749S | Spring |
| 4749DR | Dog, R. | 4749W | Wheel with Plg. |




4767



4785



4766 PH

4761



4760



4763

PREFERRED BY MEN WHO EARN THEIR LIVING WITH TOOLS

# PLOMB TOOL COMPANY

## Streamlined Tools




4745



4737-8




4744

4746

**Only Midget Tools can do fast, efficient work on intricate jobs--you should have a complete 1/4" Square Drive assortment.**

### Screw Driver Sockets—1/4" Square Drive

| Tool No. | | Length | Description |
|---|---|---|---|
| 4737 | No. 1 Phillips Bit | 1/4" | Female Drive |
| 4738 | No. 2 Phillips Bit | 1/4" | Female Drive |
| 4744 | 1/4"x.030" " | 1 5/8" | General, Carburetor, Electrical, Radio, Etc. |
| 4745 | 3/8"x.040" " | 2 1/8" | |
| 4746 | 5/16"x.035" " | 1 3/4" | |
| 4747 | 5/32"x.038" " | 3 15/16" | |




4706-4709 4710-4714

### Standard Sockets

| Cat. No. | Description | Overall Length | Purpose |
|---|---|---|---|
| 4706 | 3/16" Hexagon | 1" | General |
| 4707 | 7/32" Hexagon | 1" | " |
| 4708 | 1/4" Hexagon | 1" | " |
| 4709 | 9/32" Hexagon | 1" | " |
| 4710 | 5/16" Hexagon | 1" | " |
| 4711 | 11/32" Hexagon | 1" | " |
| 4712 | 3/8" Hexagon | 1" | " |
| 4714 | 7/16" Hexagon | 1" | " |
| 4716 | 1/2" 12-Point | 1" | " |
| 4708S | 1/4" 8-Point | 1" | " |
| 4710S | 5/16" 8-Point | 1" | " |




4708L-4709L 4710L-4714L

### Extra Deep Sockets

| | | | |
|---|---|---|---|
| 4708L | 1/4" Hexagon | 2" | Aviation, Carburetor, Electrical, Radio, Etc. |
| 4709L | 9/32" Hexagon | 2" | |
| 4710L | 5/16" Hexagon | 2" | |
| 4711L | 11/32" Hexagon | 2" | |
| 4712L | 3/8" Hexagon | 2" | |
| 4714L | 7/16" Hexagon | 2" | |




4770

4708S-4710S

# 3/8" SQUARE DRIVE SOCKET SETS

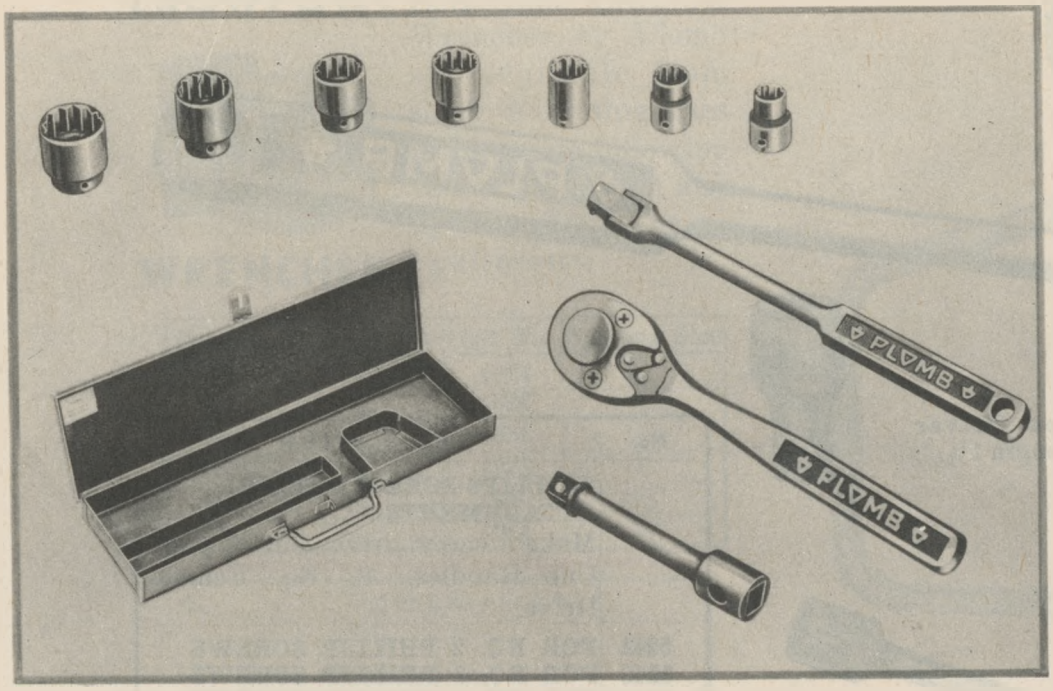


5200 SR

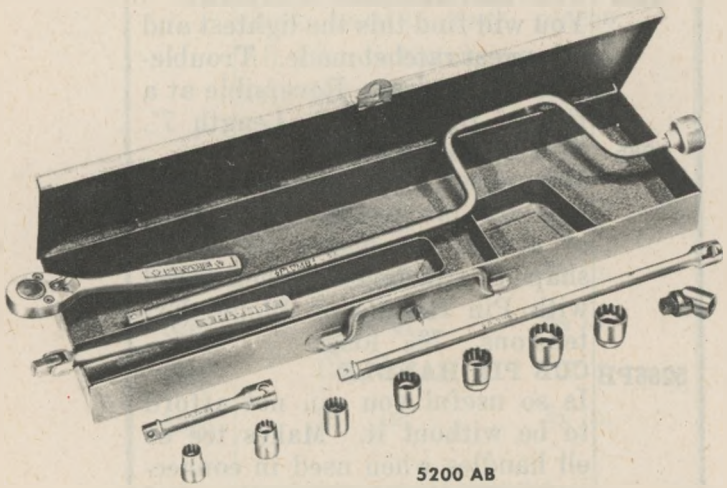

5200 AB

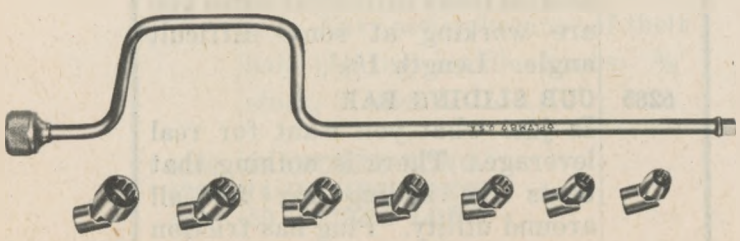

5200 UB

## 3/8" SQ. DRIVE

### SOCKET AND ATTACHMENT SET 5200 SR SET

This is an ideal basic set upon which you can build your tool set of the future. Initial items are selected to give the utmost in utility, yet within a minimum cost.

**5200 SR SET**

| | |
|---|---|
| 5212 | 3/8" 12 point socket |
| 5214 | 7/16" 12 point socket |
| 5216 | 1/2" 12 point socket |
| 5218 | 9/16" 12 point socket |
| 5220 | 5/8" 12 point socket |
| 5222 | 11/16" 12 point socket |
| 5224 | 3/4" 12 point socket |
| 5260 | Extension 3-1/2" long |
| 5265 | Hinge Handle |
| 5249 | Rev. Ratchet |
| 5295 | Metal Box |

**5200-S SET**

Same as No. 5200-SR set less No. 5249 Rev. Ratchet.

**5200-NR SET**

No. 5200-NR (in Cardboard Box) same as No. 5200-SR set less No. 5295 Metal Box.

**5200-N SET**

No. 5200-N set (in Cardboard Box) same as No. 5200-SR set less No. 5249 Rev. Ratchet and No. 5295 Metal Box.

**5200 AB SET**

| | |
|---|---|
| 5212 | Socket, 12-Point, 3/8" Opening |
| 5214 | Socket, 12-Point, 7/16" Opening |
| 5216 | Socket, 12-Point, 1/2" Opening |
| 5218 | Socket, 12-Point, 9/16" Opening |
| 5220 | Socket, 12-Point, 5/8" Opening |
| 5222 | Socket, 12-Point, 11/16" Opening |
| 5224 | Socket, 12-Point, 3/4" Opening |
| 5249 | Reversible Ratchet, 7" Long |
| 5260 | Extension, 3-1/2" Long |
| 5262 | Extension, 12" Long |
| 5265 | Hinge Handle, 7-3/8" Long |
| 5270 | Universal Joint |
| 5280 | Speed Handle, 18" Long |
| 5295 | Steel Box, 5-3/16"x18-1/2"x1-1/2" |

**5200 AA SET**

Same as Set No. 5200 AB, except in cardboard box instead of No. 5295 steel box.

**5200 UB UNIVERSAL SOCKET SET**

| | |
|---|---|
| 5273 | Universal Socket, 12-Point, 3/8" Opening |
| 5274 | Universal Socket, 12-Point, 7/16" Opening |
| 5275 | Universal Socket, 12-Point, 1/2" Opening |
| 5276 | Universal Socket, 12-Point, 9/16" Opening |
| 5277 | Universal Socket, 12-Point, 5/8" Opening |
| 5278 | Universal Socket, 12-Point, 11/16" Opening |
| 5279 | Universal Socket, 12-Point, 3/4" Opening |
| 5280 | Speed Handle, 18" Long |

**5200 UA UNIVERSAL SOCKET SET**

Same as Set No. 5200 UB, except without Speed Handle No. 5280.

# PLOMB TOOL COMPANY

*Streamlined Tools*

## CUB SOCKETS AND ATTACHMENTS 3/8" SQ. DRIVE

5265

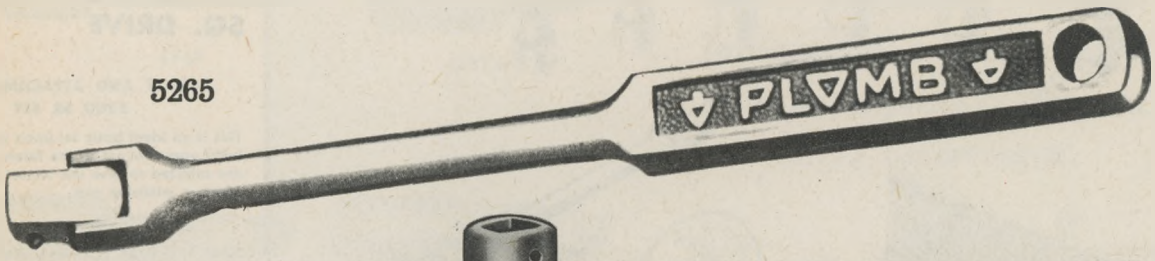

No. 5246—Cub Screw Driver Socket, Length 1 5/16".



5270

5241-43

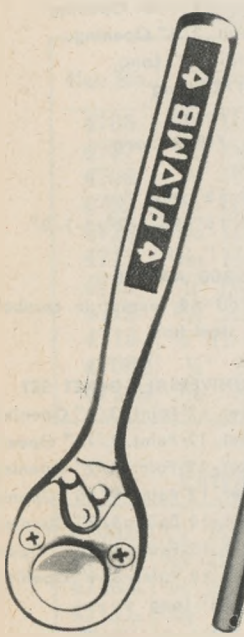

5249 5266PH 5285

| No. | DESCRIPTION |
|---|---|
| | **PHILLIPS SCREW DRIVER ATTACHMENTS** Make a screw driver out of your Cub Handles. 3/8" Sq. Female Drive. |
| 5241 | **FOR NO. 2 PHILLIP SCREWS** |
| 5242 | **FOR NO. 3 PHILLIP SCREWS** |
| 5243 | **FOR NO. 4 PHILLIP SCREWS** |
| 5249 | **CUB REVERSIBLE RATCHET** You will find this the lightest and strongest ratchet made. Trouble-free mechanism. Reversible at a flip of the trigger. Length 7". |
| 5265 | **CUB HINGE HANDLE** Has upset knurled handle with hole for pin handle. This type of attachment makes tee or ell shaped attachment when used with Pin Handle or Plomb Extensions. 7 3/8" long. |
| 5266PH | **CUB PIN HANDLE** Is so useful you can not afford to be without it. Makes tee or ell handles when used in connection with Plomb Extension. 5/16" round stock, 7 1/2" long. |
| 5270 | **CUB UNIVERSAL JOINT** Is just the tool you need to get around those corners or when you are working at some difficult angle. Length 1 5/8". |
| 5285 | **CUB SLIDING BAR** Is just what you want for real leverage. There is nothing that beats the sliding bar for all around utility. Plug has friction ball. 8" long. |

## CROWFOOT WRENCHES




Detachable Crowfoot Wrenches by Plomb are available from stock in opening sizes as shown in following table. Used with any 3/8" drive handle or attachment.

| Cat. No. | Opening Size | Cat. No. | Opening Size |
|---|---|---|---|
| 4912 | 3/8" | 4924 | 3/4" |
| 4914 | 7/16" | 4926 | 13/16" |
| 4916 | 1/2" | 4928 | 7/8" |
| 4918 | 9/16" | 4932 | 1" |
| 4920 | 5/8" | 4940 | 1 1/4" |
| 4922 | 11/16" | 4944 | 1 3/8" |

| No. | DESCRIPTION |
|---|---|
| | **CUB EXTENSIONS**<br>Are handy for reaching into those hard-to-reach places. All Plomb Extensions have hole for Pin Handle except No. 5259. |
| | **Length** — **Stock** |
| 5259 | 1 3/4 in. — 3/8 in. |
| 5260 | 3 1/2 in. — 3/8 in. |
| 5261 | 7 1/2 in. — 3/8 in. |
| 5262 | 12 in. — 3/8 in. |
| 5263 | 18 in. — 3/8 in. |
| | **CUB SPEED HANDLES**<br>Just as the name implies . . . you will find them the speediest tools you ever used for fast nut turning. Easy action because of their ball bearing handle knobs. 3/8" stock, 3" throw. |
| 5280 | **18 INCHES LONG** |
| 5281 | **14 INCHES LONG** |
| 5283 | **30 INCHES LONG** |

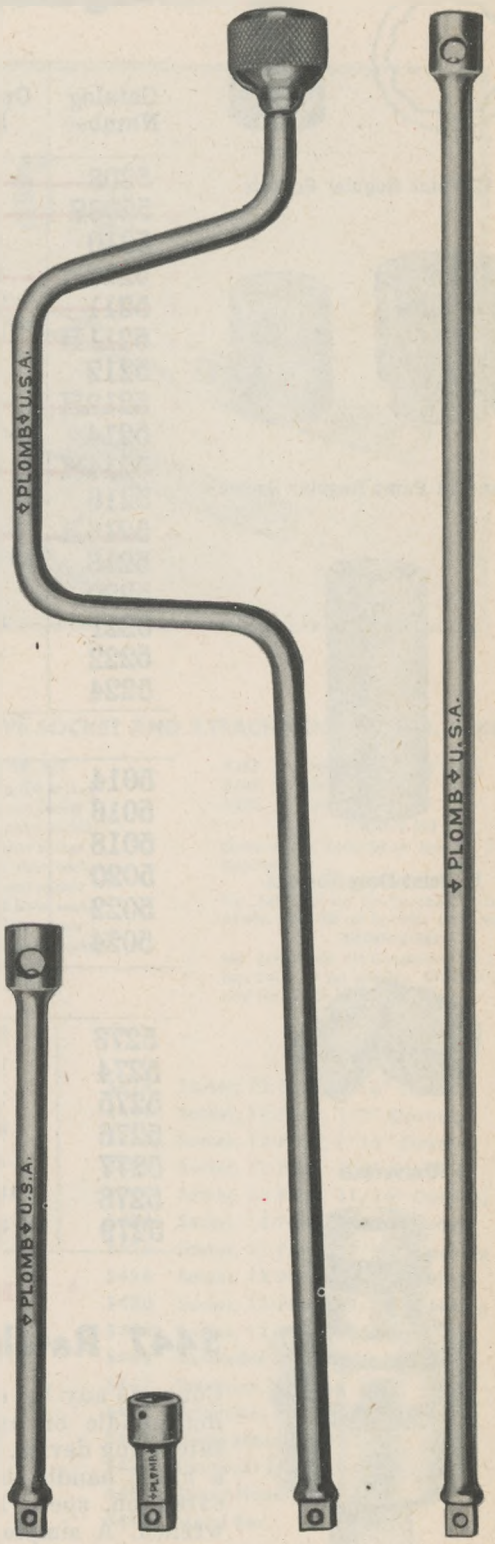


5261 5259 5280-5281 5262-5263

PLUMB TOOL COMPANY

*Streamlined Tools*

# Regular Cub Sockets 3/8" Square Drive

## Square, Hexagon and 12 Point

12 Point Regular Sockets



Hex and 12 Point Regular Sockets



12 Point Deep Sockets

Universals

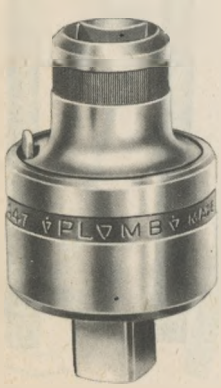

Ratcheting Attachment

| Catalog Number | Opening Size | Sq.-Hex. or 12 Pt. | USS Bolt Sizes | Amer. Std. Bolt Size | SAE Bolt Size | Overall Length | Inside Clearance |
|---|---|---|---|---|---|---|---|
| * ~~5208~~ | ~~1/4"~~ | ~~Hex~~ | | ~~4~~ | | ~~15/16"~~ | ~~1/2"~~ |
| * ~~5208S~~ | ~~1/4"~~ | ~~Square~~ | | ~~4~~ | | ~~15/16"~~ | ~~1/2"~~ |
| 5210 | 5/16" | 12 Point | 1/8" | 5&6 | | 15/16" | 1/2" |
| * ~~5210H~~ | ~~5/16"~~ | ~~Hex~~ | " | | | ~~7/8"~~ | ~~1/2"~~ |
| * ~~5211~~ | ~~11/32"~~ | ~~12 Point~~ | | ~~8~~ | | | |
| * ~~5211H~~ | ~~11/32"~~ | ~~Hex~~ | | ~~8~~ | | | |
| 5212 | 3/8" | 12 Point | 3/16" | 10 | | 15/16" | 1/2" |
| * ~~5212H~~ | ~~3/8"~~ | ~~Hex~~ | " | " | | | |
| 5214 | 7/16" | 12 Point | | 12&1/4" | 1/4" | 15/16" | 1/2" |
| * ~~5214H~~ | ~~7/16"~~ | ~~Hex~~ | | " | | | |
| 5216 | 1/2" | 12 Point | 1/4" | | 5/16" | 15/16" | 1/2" |
| * ~~5216H~~ | ~~1/2"~~ | ~~Hex~~ | " | | " | | |
| 5218 | 9/16" | 12 Point | | 5/16" | 3/8" | 1" | 9/16" |
| 5220 | 5/8" | do | | 3/8" | 7/16" | 1" | 9/16" |
| 5221 | 21/32" | do | | | | 1" | 9/16" |
| 5222 | 11/16" | do | 3/8" | | | 1 1/16" | 5/8" |
| 5224 | 3/4" | do | | 7/16" | 1/2" | 1 1/16" | 5/8" |

## Deep Cub Sockets

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 5014 | 7/16" | 12 Point | | 12&1/4" | 1/4" | 2 1/8" | 1 3/4" |
| 5016 | 1/2" | do | 1/4" | | 5/16" | 2 1/8" | 1 3/4" |
| 5018 | 9/16" | do | | 5/16" | 3/8" | 2 1/8" | 1 3/4" |
| 5020 | 5/8" | do | | 3/8" | 7/16" | 2 1/8" | 1 3/4" |
| 5022 | 11/16" | do | 3/8" | | | 2 1/8" | 1 3/4" |
| 5024 | 3/4" | do | | 7/16" | 1/2" | 2 1/8" | 1 3/4" |

## Universal Cub Sockets

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 5273 | 3/8" | 12 Point | 3/16" | 10" | | 1 3/8" | 3/8" |
| 5274 | 7/16" | do | | 12&1/4" | 1/4" | 1 3/8" | 3/8" |
| 5275 | 1/2" | do | 1/4" | | 5/16" | 1 1/2" | 7/16" |
| 5276 | 9/16" | do | | 5/16" | 3/8" | 1 9/16" | 1/2" |
| 5277 | 5/8" | do | | 3/8" | 7/16" | 1 11/16" | 9/16" |
| 5278 | 11/16" | do | 3/8" | | | 1 13/16" | 9/16" |
| 5279 | 3/4" | do | | 7/16" | 1/2" | 1 13/16" | 9/16" |

* TEMPORARILY DISCONTINUED

## 5447 Ratcheting Attachment—1/2" Sq. Drive

Converts any 1/2" drive non-ratcheting handle or attachment into a ratcheting device. Used mainly with a hinge handle, hinge handle plus extension, speed handle or torque wrench. A simple, positive device, huskily built for high torque strength yet compact for ample clearance. Has very little backdrag.

Ratchet has 34 teeth, providing positive engagement every 10 1/2 degrees. Reversing lever acts directly on pawl, eliminating separate cam mechanism and possible misalignment and malfunction. Lever is well protected from damage or unintentional reversal.

# ½" SQUARE DRIVE SOCKET SETS

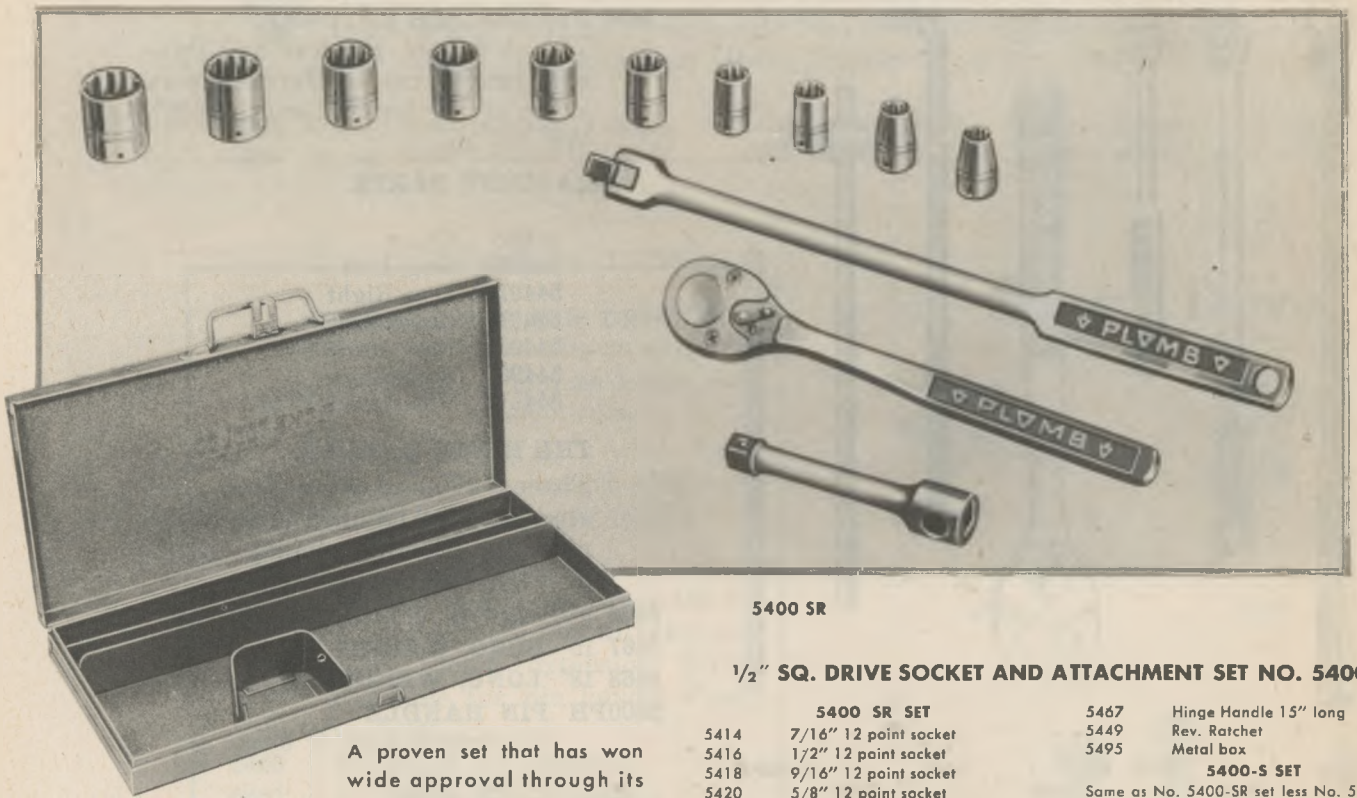


5400 SR

½" SQ. DRIVE

A proven set that has won wide approval through its practical usefulness.

## ½" SQ. DRIVE SOCKET AND ATTACHMENT SET NO. 5400SR

**5400 SR SET**

| | |
|---|---|
| 5414 | 7/16" 12 point socket |
| 5416 | 1/2" 12 point socket |
| 5418 | 9/16" 12 point socket |
| 5420 | 5/8" 12 point socket |
| 5422 | 11/16" 12 point socket |
| 5424 | 3/4" 12 point socket |
| 5426 | 13/16" 12 point socket |
| 5428 | 7/8" 12 point socket |
| 5430 | 15/16" 12 point socket |
| 5432 | 1" 12 point socket |
| 5461 | Extension 5" long |
| 5467 | Hinge Handle 15" long |
| 5449 | Rev. Ratchet |
| 5495 | Metal box |

**5400-S SET**

Same as No. 5400-SR set less No. 5449 Rev. Ratchet.

**5400-NR SET**

No. 5400-NR set (in Cardboard Box) same as No. 5400-SR set less No. 5495 Metal Box.

**5400-N SET**

No. 5400-N set (in Cardboard Box) same as No. 5400-SR set less No. 5449 Rev. Ratchet and No. 5495 Metal Box.

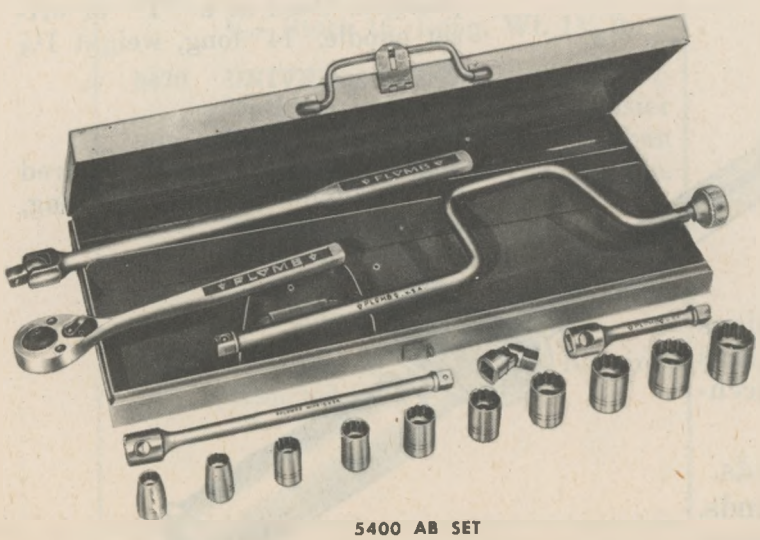


5400 AB SET

**5400 AB**

| | |
|---|---|
| 5414 | Socket, 12-Point, 7/16" Opening |
| 5416 | Socket, 12-Point, 1/2" Opening |
| 5418 | Socket, 12-Point, 9/16" Opening |
| 5420 | Socket, 12-Point, 5/8" Opening |
| 5422 | Socket, 12-Point, 11/16" Opening |
| 5424 | Socket, 12-Point, 3/4" Opening |
| 5426 | Socket, 12-Point, 13/16" Opening |
| 5428 | Socket, 12-Point, 7/8" Opening |
| 5430 | Socket, 12-Point, 15/16" Opening |
| 5432 | Socket, 12-Point, 1" Opening |
| 5449 | Reversible Ratchet, 10-1/4" Long |
| 5461 | Extension, 5" Long |
| 5463 | Extension, 10" Long |
| 5467 | Hinge Handle, 15" Long |
| 5470 | Universal Joint |
| 5480 | Speed Handle, 18" Long |
| 5495 | Metal Box |

**5400 AA SET**

Same as Set No. 5400 AB, except in cardboard box instead of No. 5495 metal box.

# Standard Sockets and Attachments—½" Drive

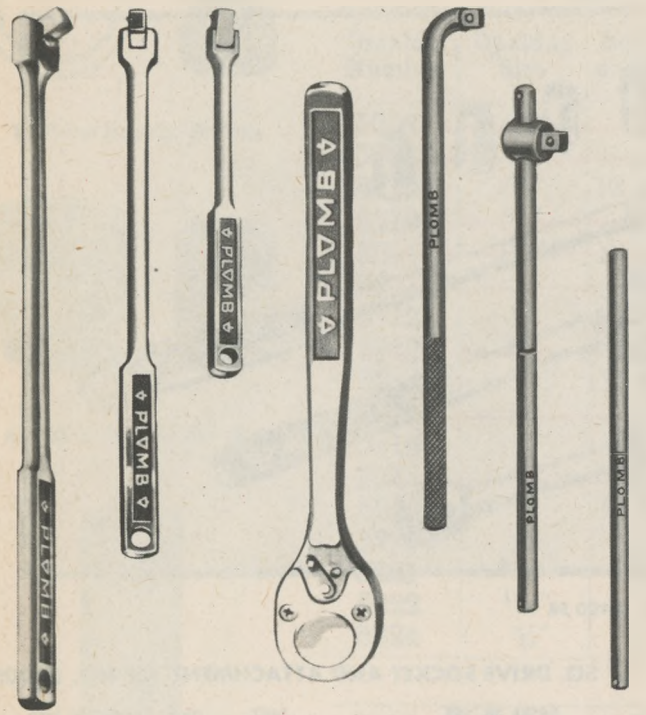


5468 5467 5466 5449 5486 5485 5466PH

**5449 REVERSIBLE RATCHET.**
The strongest, lightest and thinnest ratchet made. Reversible at a flip of the lever. Length 10¼". Wt. 1½ lbs.

**RATCHET PARTS.**

| | |
|---|---|
| **5449C** | Cover |
| **5449DL** | Dog, Left |
| **5449DR** | Dog, Right |
| **5449H** | Cover Screw |
| **5449R** | Rev. Assembly |
| **5449S** | Spring |
| **5449W** | Wheel with Plug |

**THE HINGE HANDLE.**
Three for you to choose from. All upset knurled handles drilled with pinhole. Slender shanks, lightness and balance.

**5466 9½" LONG, WEIGHT ¾ lb.**
**5467 15" LONG, WEIGHT 1¼ lb.**
**5468 18" LONG, WEIGHT 1¾ lb.,**
**5300PH PIN HANDLE**
For deep sockets. 8" long.

**5466PH PIN HANDLE.**
A handy little bar to be used with any Plomb extension or hinge handle. 11½" long, ½" stock.

**5485 THE SLIDING BAR.**
Friction Ball Hold Plug in any position. Used as a "T" or offset handle. 14" long, weight 1¼ lb.

**5486 THE ELL HANDLE.**
Where real leverage is required the ell handle is tops. 14" long, weight 1¼ lb.

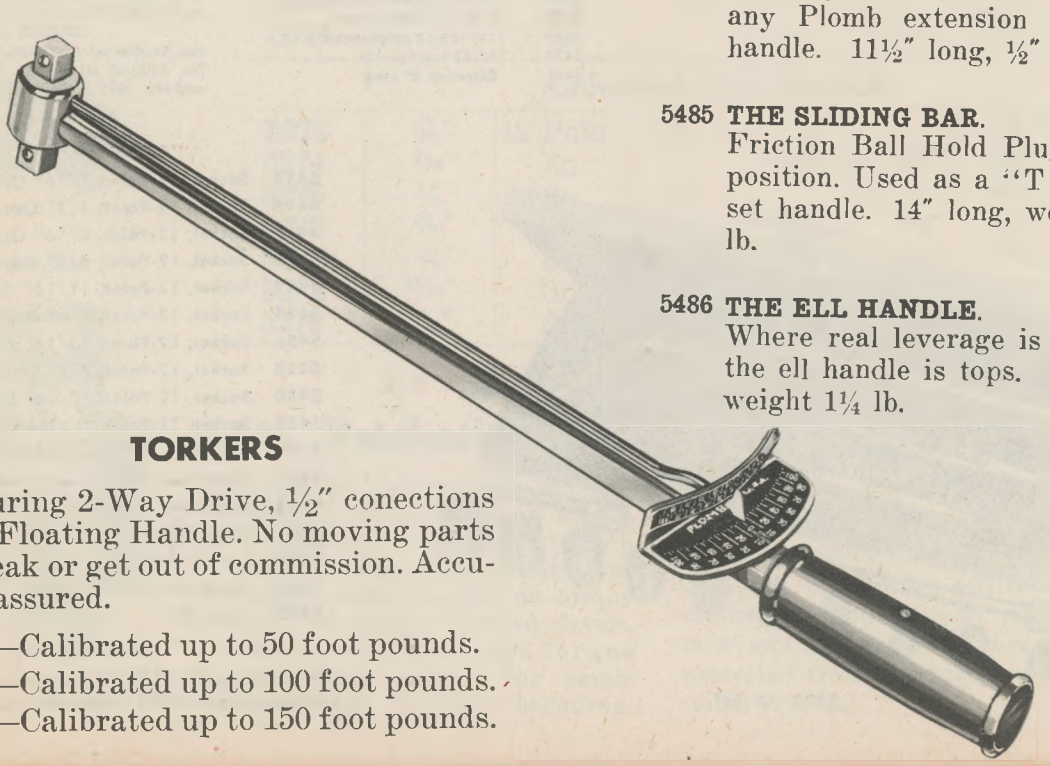

## TORKERS

Featuring 2-Way Drive, ½" conections with Floating Handle. No moving parts to break or get out of commission. Accuracy assured.

5401—Calibrated up to 50 foot pounds.
5402—Calibrated up to 100 foot pounds.
5403—Calibrated up to 150 foot pounds.

# ADAPTORS

5254

Increase the range of your Cub and Standard Sets with Plomb Adaptors. Makes it possible to use Cub Sockets with Standard Drive Attachments and vice versa. The same is true with your Heavy Duty Sets too. See Pages 36-39.

| | | | |
|---|---|---|---|
| **5253** | ½ Sq. Male x ⅜ Sq. Female | **5453** | ½ Sq. Male x ¾ Sq. Female |
| **5254** | ⅜ Sq. Male x ½ Sq. Female | **5653** | ¾ Sq. Male x ½ Sq. Female |

5253

**DRAG LINK SCREW DRIVERS.**
Many uses especially on any large slotted screws and used with most ½" drive attachments.

**5444** Bit ¾" Wide, Length 1 9/16".
**5446** Bit 1" Wide, Length 1 9/16".

**EXTENSIONS.**
Increase to a wider range the use of your sockets and attachments. Each Plomb extension drilled with hole for pin handle except No. 5460.

**5460** 2½ **INCH EXTENSION.**
**5461** 5 **INCH EXTENSION.**
**5463** 10 **INCH EXTENSION.**
**5464** 18 **INCH EXTENSION.**

**5469 SPEED HINGE HANDLE.**
Combines the features of a speeder and hinge handle. Ball bearing grip. 7" Dia. Swing.

9/16" Stock 16" Long, Wt. 1¾ lb.

**5470 UNIVERSAL JOINT.**
Nothing makes your work easier than a Universal Joint when working at some difficult angle.

**SPEED HANDLES.**
Nothing finer than these Ball Bearing Speeders for really speeding nuts on or off.

**5480** 18" Long ½" Stock, Ball Bearing, Knurled Grip 4" Throw.

## ½" Square Drive



5470

5444-6

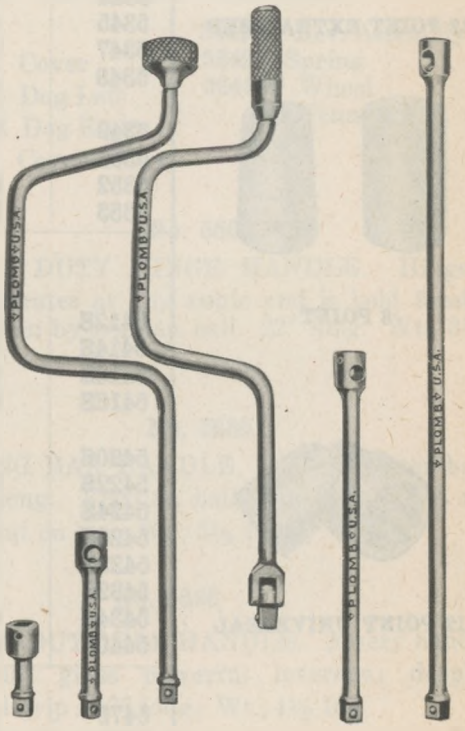


5460 5461 5480 5469 5463 5464

PLOMB TOOL COMPANY

*Streamlined Tools*

# Standard Sockets ½" Square Drive

12 POINT



12 POINT EXTRA DEEP



8 POINT



12 POINT UNIVERSAL

| Cat. No. | Opening Size | U.S.S. Bolts & Nuts | Amer. Std. Bolts & Nuts | S.A.E. Bolt Size | Overall Length | Inside Clearance |
|---|---|---|---|---|---|---|
| **STANDARD 12 POINT** | | | | | | |
| 5414 | 7/16 | | 12 & 1/4 | 1/4 | 1 3/8 | 3/4 |
| 5416 | 1/2 | 1/4 | | 5/16 | 1 3/8 | 3/4 |
| 5418 | 9/16 | | 5/16 | 3/8 | 1 3/8 | 3/4 |
| 5419 | 19/32 | 5/16 | | | 1 3/8 | 3/4 |
| 5420 | 5/8 | | 3/8 | 7/16 | 1 3/8 | 3/4 |
| 5421 | 21/32 | | | | 1 3/8 | 3/4 |
| 5422 | 11/16 | 3/8 | | | 1 3/8 | 7/8 |
| 5424 | 3/4 | | 7/16 | 1/2 | 1 3/8 | 7/8 |
| 5425 | 25/32 | 7/16 | | | 1 3/8 | 7/8 |
| 5426 | 13/16 | | 1/2 | | 1 3/8 | 7/8 |
| 5428 | 7/8 | 1/2 | 9/16 | 9/16 | 1 1/2 | 1 |
| 5429 | 29/32 | | | | 1 1/2 | 1 |
| 5430 | 15/16 | | 5/8 | 5/8 | 1 1/2 | 1 |
| 5431 | 31/32 | 9/16 | | | 1 1/2 | 1 |
| 5432 | 1 | | | 11/16 | 1 1/2 | 1 |
| 5434 | 1 1/16 | 5/8 | | 3/4 | 1 1/2 | 1 |
| 5436 | 1 1/8 | | 3/4 | | 1 3/4 | 1 1/4 |
| 5438 | 1 3/16 | | | | 1 3/4 | 1 1/4 |
| 5440 | 1 1/4 | 3/4 | | 7/8 | 1 3/4 | 1 1/4 |
| **STANDARD 12 POINT EXTRA DEEP** | | | | | | |
| 5340 | 1/2 | 1/4 | | 5/16 | 3 1/4 | 2 3/4 |
| 5341 | 9/16 | | 5/16 | 3/8 | 3 1/4 | 2 3/4 |
| 5343 | 5/8 | | 3/8 | 7/16 | 3 1/4 | 2 3/4 |
| 5344 | 11/16 | 3/8 | | | 3 1/4 | 2 3/4 |
| 5345 | 3/4 | | 7/16 | 1/2 | 3 1/4 | 2 3/4 |
| 5347 | 13/16 | | 1/2 | | 3 1/4 | 2 3/4 |
| 5348 | 7/8 | 1/2 | 9/16 | 9/16 | 3 1/4 | 2 3/4 |
| 5349 | 15/16 | | 5/8 | 5/8 | 3 1/4 | 2 3/4 |
| 5351 | 1 | | | 11/16 | 3 1/4 | 2 3/4 |
| 5352 | 1 1/16 | 5/8 | | 3/4 | 3 1/4 | 2 3/4 |
| 5353 | 1 1/8 | | 3/4 | | 3 1/4 | 2 3/4 |
| **STANDARD 8 POINT** | | | | | | |
| 5412S | 3/8 | | 10 | | 1 3/8 | 3/4 |
| 5414S | 7/16 | | 12 & 1/4 | | 1 3/8 | 3/4 |
| 5416S | 1/2 | 1/4 | | | 1 3/8 | 3/4 |
| 5418S | 9/16 | | 5/16 | | 1 3/8 | 3/4 |
| 5420S | 5/8 | | 3/8 | | 1 3/8 | 7/8 |
| 5422S | 11/16 | 3/8 | | | 1 1/2 | 1 |
| 5424S | 3/4 | | 7/16 | | 1 1/2 | 1 |
| 5426S | 13/16 | | 1/2 | | 1 1/2 | 1 |
| 5428S | 7/8 | 1/2 | 9/16 | | 1 3/4 | 1 1/4 |
| 5432S | 1 | | | | 1 3/4 | 1 1/4 |
| 5434S | 1 1/16 | 5/8 | | | 2 | 1 1/2 |
| 5440S | 1 1/4 | 3/4 | | | 2 | 1 1/2 |
| **UNIVERSAL SOCKETS 12 POINT** | | | | | | |
| 5475 | 1/2 | 1/4 | | 5/16 | 1 25/32 | |
| 5476 | 9/16 | 3/8 | 5/16 | | 1 13/16 | |
| 5477 | 5/8 | | 3/8 | 7/16 | 1 7/8 | |
| 5478 | 11/16 | 3/8 | | | 1 15/16 | |
| 5479 | 3/4 | | 7/16 | 1/2 | 2 | |
| 5470 | **Universal Joint,** Overall Length, 2 1/64 in. | | | | | |

PREFERRED BY MEN WHO EARN THEIR LIVING WITH TOOLS

# HEAVY DUTY SOCKETS AND ATTACHMENTS

## 3/4" SQUARE DRIVE

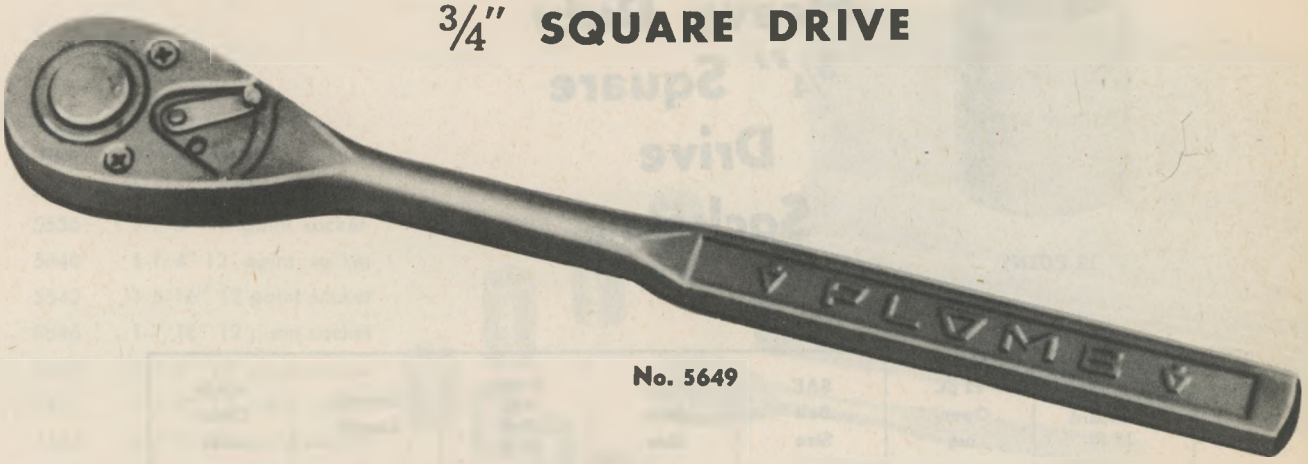


No. 5649

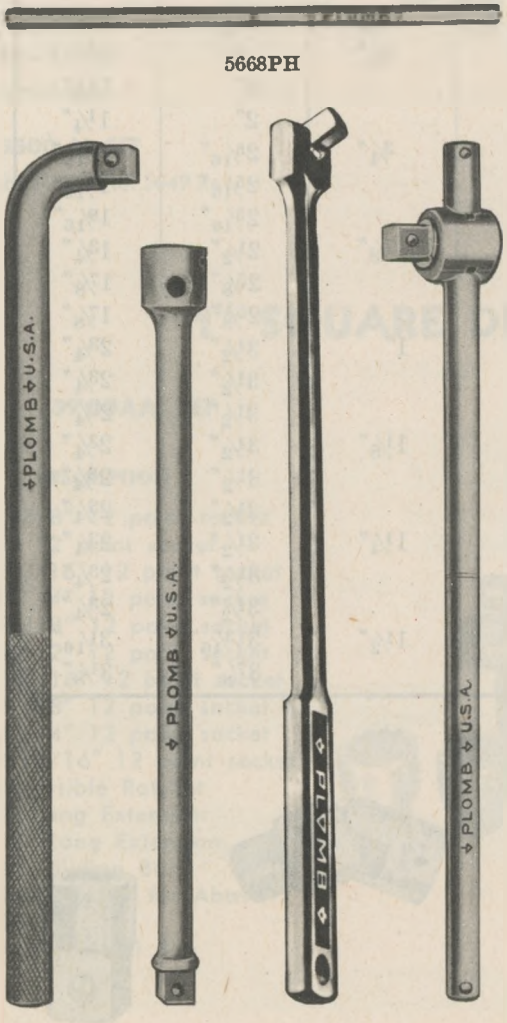


5668PH

5686 5660-61-63 5668 5685

**No. 5649**

REVERSIBLE RATCHET, complete with Adaptor Plug. Precision made, overall length 20". (5648 is Ratchet without 5652 Plug.) Wt., 5½ lbs.

RATCHET PARTS 5649

**5649C** Cover
**5649DL** Dog Left
**5649DR** Dog Right
**5649H** Cover Screw
**5649R** Rev. Assembly
**5649S** Spring
**5649W** Wheel Female

**No. 5668**

HEAVY DUTY HINGE HANDLE. Hinged plug operates at any angle and is held firmly in position by friction ball. 22" long. Wt., 3½ lbs.

**No. 5685**

SLIDING BAR HANDLE. 13/16" diameter bar is 18" long. Friction ball in plug holds it at any point on bar. Wt., 3¼ lbs

**No. 5686**

HEAVY-DUTY ELL HANDLE. A very handy tool that gives powerful leverage; deeply knurled grip; 17" long. Wt., 4½ lbs.

**No. 5660** 5" EXTENSION.
**No. 5661** 8" EXTENSION.
**No. 5663** 16" EXTENSION.
} With Hole for Pin Handle.

**No. 5668PH** PIN HANDLE. ½" Stock, 12" long

PLUMB TOOL COMPANY

*Streamlined Tools*

12 POINT

# Heavy Duty 3/4" Square Drive Sockets

| Catalog No. Standard 12 Pt. | 12 pt. Opening | SAE Bolt Size | U.S.S. Bolt Size | Amer. Std. Bolt Size | Overall Length | Inside Clearance |
|---|---|---|---|---|---|---|
| 5528 | 7/8" | 9/16" | 1/2" | 9/16" | 1 3/4" | 1" |
| 5530 | 15/16" | 5/8" | | 5/8" | 1 3/4" | 1" |
| 5532 | 1" | 11/16" | | | 2" | 1 1/4" |
| 5534 | 1 1/16" | 3/4" | 5/8" | | 2" | 1 1/4" |
| 5536 | 1 1/8" | | | 3/4" | 2 5/16" | 1 9/16" |
| 5538 | 1 3/16" | | | | 2 5/16" | 1 9/16" |
| 5540 | 1 1/4" | 7/8" | 3/4" | | 2 5/16" | 1 9/16" |
| 5542 | 1 5/16" | | | 7/8" | 2 1/2" | 1 3/4" |
| 5544 | 1 3/8" | | | | 2 5/8" | 1 7/8" |
| 5546 | 1 7/16" | 1" | 7/8" | | 2 5/8" | 1 7/8" |
| 5548 | 1 1/2" | | | 1" | 3 1/2" | 2 3/4" |
| 5550 | 1 9/16" | | | | 3 1/2" | 2 3/4" |
| 5552 | 1 5/8" | 1 1/8" | 1" | | 3 1/2" | 2 3/4" |
| 5554 | 1 11/16" | | | 1 1/8" | 3 1/2" | 2 3/4" |
| 5556 | 1 3/4" | | | | 3 1/2" | 2 3/4" |
| 5558 | 1 13/16" | 1 1/4" | 1 1/8" | | 3 1/2" | 2 3/4" |
| 5560 | 1 7/8" | | | 1 1/4" | 3 1/2" | 2 3/4" |
| 5564 | 2" | 1 3/8" | 1 1/4" | | 3 1/2" | 2 3/4" |
| 5568 | 2 1/8" | | | | 3 1/2" | 2 3/4" |
| 5572 | 2 1/4" | | | 1 1/2" | 3 13/16" | 3 1/16" |
| 5576 | 2 3/8" | | 1 3/4" | | 3 7/8" | 3 1/8" |

**No. 5670**

**UNIVERSAL JOINT,**
3 17/32" overall length. 3/4" male and female drives.




## Socket Adaptors

5453 1/2" square male by 3/4" sq. female.
5653 3/4" square male by 1/2" sq. female.
5853 1" square male by 3/4" sq. female.
5854 3/4" square male by 1" sq. female.

# 3/4" SQUARE DRIVE SOCKET SETS

| TOOL NO. | 5500 NR SET |
|---|---|
| 5534 | 1-1/16" 12 point socket |
| 5536 | 1-1/8" 12 point socket |
| 5540 | 1-1/4" 12 point socket |
| 5542 | 1-5/16" 12 point socket |
| 5546 | 1-7/16" 12 point socket |
| 5548 | 1-1/2" 12 point socket |
| 5552 | 1-5/8" 12 point socket |
| 5556 | 1-3/4" 12 point socket |
| 5661 | Extension 8" long |
| 5685 | Sliding Bar |
| 5649 | Rev. Ratchet |
| 5695 | Metal Box |

**5500 N SET**

Same as above less No. 5649 Rev. Ratchet

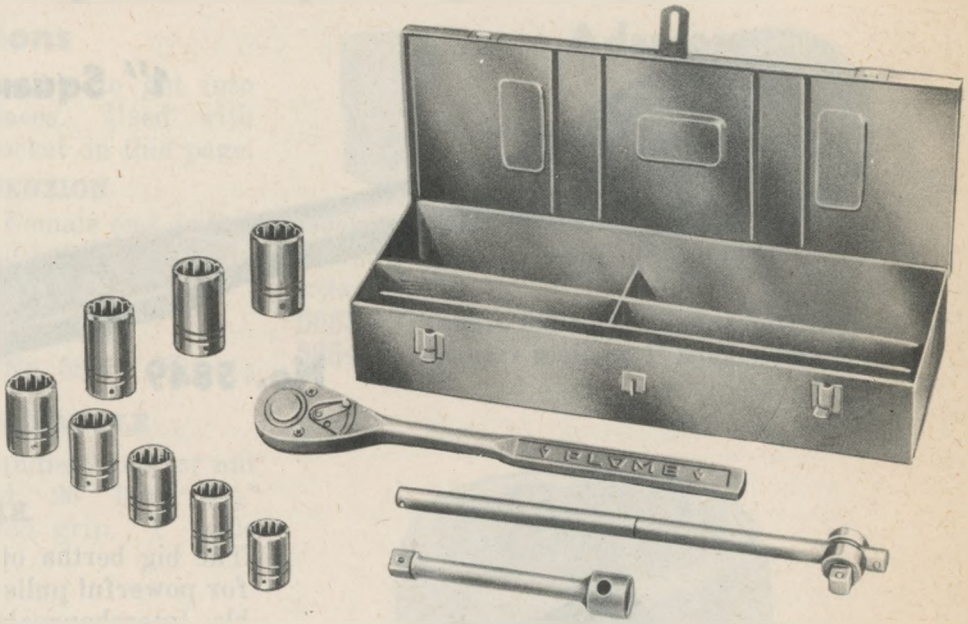

**SOCKET AND ATTACHMENT SET NO. 5500 NR**

Designed for tough service, this complete, dependable set leaves little to be desired, when the job calls for heavy work.

# 1" SQUARE DRIVE SOCKET SET

**5700AA SET**

| TOOL NO. | DESCRIPTION |
|---|---|
| 5760 | 1-7/8" 12 point socket |
| 5764 | 2" 12 point socket |
| 5770 | 2-3/16" 12 point socket |
| 5772 | 2-1/4" 12 point socket |
| 5776 | 2-3/8" 12 point socket |
| 5780 | 2-1/2" 12 point socket |
| 5782 | 2-9/16" 12 point socket |
| 5784 | 2-5/8" 12 point socket |
| 5788 | 2-3/4" 12 point socket |
| 5794 | 2-15/16" 12 point socket |
| 5849 | Reversible Ratchet |
| 5861 | 9" Long Extension |
| 5863 | 18" Long Extension |
| 5884 | 24" Sliding Bar |
| 5885 | Sliding Plug for Above Bar |
| 5894 | Heavy Metal Box |

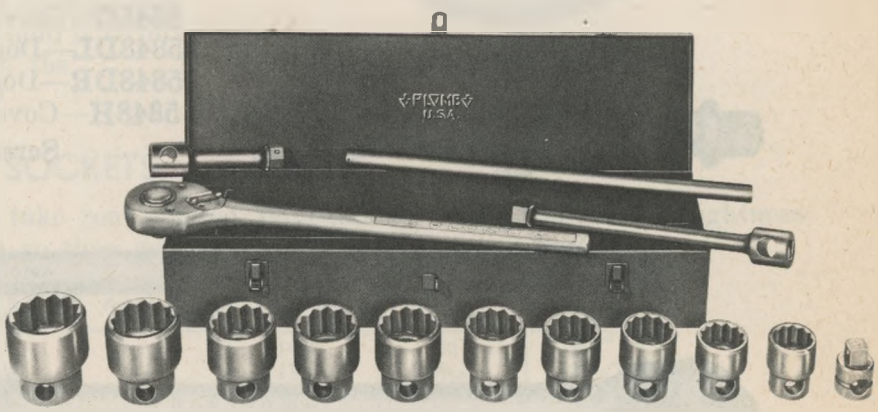

**SOCKET AND ATTACHMENT SET NO. 5700AA**

For those really tough jobs that demand extra sturdy tools, this set has all the answers. It's as complete as it is serviceable.

# PLOMB TOOL COMPANY

*Streamlined Tools*

## Extra Heavy Duty--1″ Square Drive

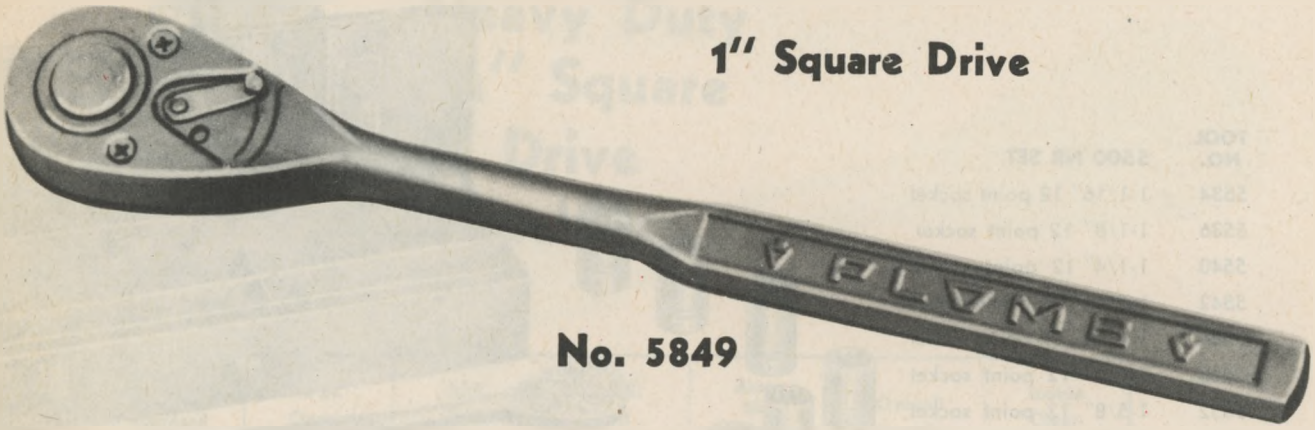


1″ Square Drive

**No. 5849**

### RATCHET

The big bertha of ratchets. Made strong for powerful pulls at high speed. Reversible, Interchangeable Drive Plugs. Wt. 12 lbs. 26″ overall length.

**5848**—Ratchet only 1″ sq. female wheel.
**5852**—1″ square male adaptor plug.

**5849**—Ratchet complete 1″ sq. male drive.




5852

### RATCHET REPAIR PARTS FOR 5848

**5848C**—Cover
**5848DL**—Dog, Left
**5848DR**—Dog, Right
**5848H**—Cover Screws
**5848R**—Rev. Assembly
**5848S**—Spring
**5848W**—Wheel




5861




5863

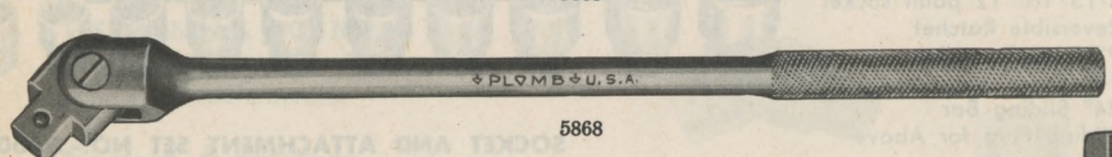


5868

5884

5885

# Extra Heavy Duty--1" Square Drive

## Extensions

Extensions make it possible to get into those hard-to-reach places. Used with every attachment and socket on this page.

**5861—9" EXTENSION**

1" square connections. Female end drilled for 1" bar. Friction ball holds bar firmly at any point. Wt. 2½ lbs.

**5863—18" EXTENSION**

Same specifications as No. 5861. Wt. 4½ lbs.

**No. 5868—HINGE HANDLE**

You will find this the handiest tool for nut turning you ever used. 26" long, 1⅛" diameter handle, knurled grip. 1" male connection. Wt. 8½ lb.

**5884—1" BAR**

This handy bar is used to turn the Big Plomb Sockets which are drilled with a hole to fit this bar. Used as a Handle to make a T drive with Plomb extensions. 24" long. Equipped with spring ball stop on one end. Wt. 5¼ lbs.

**5885—SLIDING PLUG**

Used with No. 5884 Bar as Sliding Bar Handle. Has friction ball to hold it firmly at any point on bar. Wt. 1¼ lbs.

## Adaptors




Adaptors increase the range of your tools. They make it possible to use ¾" Drive Sockets with these 1" drive attachments or the 1" drive sockets with your ¾" drive attachments.

**5853**—1" square male by ¾" square female.
**5854**—¾" square male by 1" square female.

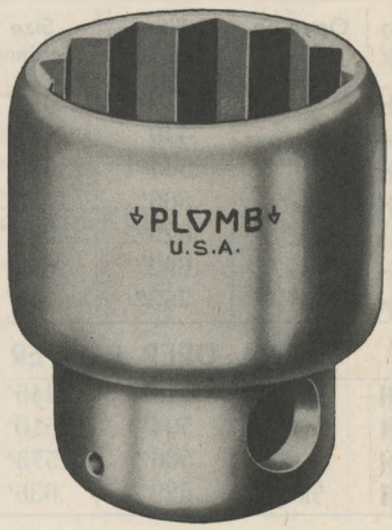


## EXTRA HEAVY-DUTY SOCKETS

Big, sturdy sockets that can take real rugged punishment. Bell shaped for lightness. Each socket drilled with hole so they can be used with sliding bar handle.

| No. | 12-Point Opening | U.S.S. Bolt Size | Amer. Std. Bolt Size | S. A. E. Bolt Size | Overall Length | Inside Clearance |
|---|---|---|---|---|---|---|
| 5752 | 1⅝" | 1" | | 1⅛" | 3¼" | 2¼" |
| *5758 | 1 13/16" | 1⅛" | | 1¼" | 3 5/16" | 2 5/16" |
| 5760 | 1⅞" | | 1¼" | | 3⅜" | 2⅜" |
| 5764 | 2" | 1¼" | | 1⅜" | 3 7/16" | 2 7/16" |
| 5770 | 2 3/16" | 1⅜" | | 1½" | 3 9/16" | 2 9/16" |
| 5772 | 2¼" | | 1½" | | 3 13/16" | 2 13/16" |
| 5776 | 2⅜" | 1½" | | | 3⅞" | 2⅞" |
| 5780 | 2½" | | | | 3 15/16" | 2 15/16" |
| 5782 | 2 3/16" | 1⅝" | | | 4" | 3" |
| 5784 | 2⅝" | | 1¾" | | 4⅛" | 3⅛" |
| 5788 | 2¾" | 1¾" | | | 4⅜" | 3⅜" |
| 5794 | 2 15/16" | 1⅞" | | | 4⅝" | 3⅝" |
| 5800 | 3⅛" | 2" | | | 4⅞" | 3⅞" |
| 5812 | 3½" | 2¼" | | | 5½" | 4½" |
| * 5754 | 1 11/16" | | 1⅛" | | 3 5/16" | 2 5/16" |

PLOMB TOOL COMPANY

*Streamlined Tools*

# CUB POWER SOCKETS

## 3/8" SQUARE DRIVE

Plomb power sockets are noted for outstanding performance on the production lines of leading automobile manufacturers and hundreds of other plants.

Selected steels contribute strength and toughness to these power sockets. Advanced design provides sockets with strong walls, maximum clearance for speed and ease in handling, snug fit and freedom from slipping. All of these features combine to give these sockets long life and a high safety factor.

Plomb power sockets are made to fit most common types of power nut-running equipment, and they can be adapted to many other power tools. Note the wide variety in opening sizes and types which assures the right socket for every need.

REGULAR




EXTRA DEEP




UNIVERSAL




EXTENSION

### REGULAR POWER SOCKETS — HEXAGON

| Catalog Number | Opening Size | Size Minimum | Size Maximum | Depth Punched | Overall Length | Outside Dia. | |
|---|---|---|---|---|---|---|---|
| | | | | | | Hdle. End | Skt. End |
| **7212H** | 3/8" | .378" | .384" | 7/16" | 1 1/8" | 11/16" | .550" |
| **7214H** | 7/16" | .440" | .446" | 7/16" | 1 1/8" | 11/16" | .640" |
| **7216H** | 1/2" | .504" | .510" | 7/16" | 1 1/8" | 3/4" | .718" |
| **7218H** | 9/16" | .566" | .573" | 1/2" | 1 3/16" | 13/16" | .822" |
| **7220H** | 5/8" | .629" | .636" | 9/16" | 1 3/16" | 7/8" | .885" |
| **7222H** | 11/16" | .692" | .699" | 5/8" | 1 1/4" | 1" | 1.000" |
| **7224H** | 3/4" | .755" | .763" | 5/8" | 1 1/4" | 1 1/8" | 1.072" |

### EXTRA DEEP POWER SOCKETS — HEXAGON

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| **7014H** | 7/16" | .440" | .446" | 1/2" | 2 1/8" | 11/16" | .636" |
| **7016H** | 1/2" | .504" | .510" | 1/2" | 2 1/8" | 3/4" | .728" |
| **7018H** | 9/16" | .566" | .573" | 1/2" | 2 1/8" | 13/16" | .765" |
| **7020H** | 5/8" | .629" | .636" | 9/16" | 2 1/8" | 7/8" | .875" |

### UNIVERSAL POWER SOCKETS — HEXAGON

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| **7274H** | 7/16" | .440" | .446" | | 1 31/32" | | |
| **7275H** | 1/2" | .504" | .510" | | 1 31/32" | | |
| **7276H** | 9/16" | .566" | .573" | | 2" | | |
| **7277H** | 5/8" | .629" | .636" | | 2" | | |
| **7278H** | 11/16" | .692" | .699" | | 2 7/32" | | |
| **7279H** | 3/4" | .755" | .763" | | 2 7/32" | | |
| **7270** | Universal Joint, 2" long, 3/8" Sq. Male and Female Connections | | | | | | |

### POWER EXTENSIONS

| Cat. No. | Sq. Drive | Hex. Drive | Shank Dia. | Overall Length |
|---|---|---|---|---|
| **7111** | 3/8" | 7/16" | 9/16" | 2 3/4" |
| **7113** | 3/8" | 7/16" | 9/16" | 5" |
| **7115** | 3/8" | 7/16" | 9/16" | 8" |
| **7117** | 3/8" | 7/16" | 9/16" | 12" |

# STANDARD POWER SOCKETS

## 1/2" SQUARE DRIVE

REGULAR



EXTRA DEEP

UNIVERSAL




EXTENSION

### REGULAR POWER SOCKETS — HEXAGON

| Cat. No. | Opening Size | U.S.S. Bolt & Nuts | Amer. Std. Bolt & Nuts | S.A.E. Bolt Size | Overall Length | Inside Clearance |
|---|---|---|---|---|---|---|
| 7414H | 7/16" | | #12 & 1/4" | 1/4" | 1 1/2" | 1" |
| 7416H | 1/2" | 1/4" | | 5/16" | 1 1/2" | 1" |
| 7418H | 9/16" | | 5/16" | 3/8" | 1 1/2" | 1" |
| 7420H | 5/8" | | 3/8" | 7/16" | 1 5/8" | 1" |
| 7422H | 11/16" | 3/8" | | | 1 5/8" | 1 1/8" |
| 7424H | 3/4" | | 7/16" | 1/2" | 1 5/8" | 1 1/8" |
| 7426H | 13/16" | | 1/2" | | 1 5/8" | 1 1/8" |
| 7428H | 7/8" | 1/2" | 9/16" | 9/16" | 1 3/4" | 1 1/4" |
| 7429H | 29/32" | | | | 1 3/4" | 1 1/4" |
| 7430H | 15/16" | | 5/8" | 5/8" | 1 7/8" | 1 3/8" |
| 7432H | 1" | | | 11/16" | 1 7/8" | 1 3/8" |
| 7434H | 1 1/16" | 5/8" | | 3/4" | 2" | 1 1/2" |
| 7436H | 1 1/8" | | 3/4" | | 2" | 1 1/2" |
| 7440H | 1 1/4" | 3/4" | | 7/8" | 2 1/8" | 1 5/8" |

### EXTRA DEEP POWER SOCKETS — HEXAGON

| | | | | | | |
|---|---|---|---|---|---|---|
| 7316H | 1/2" | 1/4" | | 5/16" | 3 1/4" | 2 3/4" |
| 7318H | 9/16" | | 5/16" | 3/8" | 3 1/4" | 2 3/4" |
| 7320H | 5/8" | | 3/8" | 7/16" | 3 1/4" | 2 3/4" |
| 7322H | 11/16" | 3/8" | | | 3 1/4" | 2 3/4" |
| 7324H | 3/4" | | 7/16" | 1/2" | 3 1/4" | 2 3/4" |
| 7326H | 13/16" | | 1/2" | | 3 1/4" | 2 3/4" |
| 7328H | 7/8" | 1/2" | 9/16" | 9/16" | 3 1/4" | 2 3/4" |
| 7330H | 15/16" | | 5/8" | 5/8" | 3 1/4" | 2 3/4" |
| 7332H | 1" | | | 11/16" | 3 1/4" | 2 3/4" |
| 7334H | 1 1/16" | 5/8" | | 3/4" | 3 1/4" | 2 3/4" |
| 7336H | 1 1/8" | | 3/4" | | 3 1/4" | 2 3/4" |

### UNIVERSAL POWER SOCKETS — HEXAGON

| | | | | | |
|---|---|---|---|---|---|
| 7474H | 7/16" | | #12 & 1/4" | 1/4" | 1 31/32" |
| 7475H | 1/2" | 1/4" | | 5/16" | 1 31/32" |
| 7476H | 9/16" | | 5/16" | 3/8" | 2 3/32" |
| 7477H | 5/8" | | 3/8" | 7/16" | 2 3/32" |
| 7478H | 11/16" | 3/8" | | | 2 7/32" |
| 7479H | 3/4" | | 7/16" | 1/2" | 2 9/32" |
| 7470 | Universal Joint, 2 3/32" Long, 1/2" Sq. Male and Female Connections | | | | |

### POWER EXTENSIONS

1/2" Square by 7/8" Hexagon Drive

| Catalog No. | Shank Dia. | Overall Length |
|---|---|---|
| 7121 | 11/16" | 2 3/4" |
| 7123 | 11/16" | 5" |
| 7125 | 11/16" | 8" |
| 7127 | 11/16" | 12" |
| 7128 | 11/16" | 18" |

1/2" Square by 5/8" Hexagon Drive

| Catalog No. | Shank Dia. | Overall Length |
|---|---|---|
| 7131 | 3/4" | 2 3/4" |
| 7133 | 3/4" | 5" |
| 7135 | 3/4" | 8" |
| 7137 | 3/4" | 12" |

# PLOMB TOOL COMPANY

*Streamlined Tools*

## IMPACT SOCKETS AND INTERCHANGE LIST

PLOMB IMPACT SOCKETS are made from special alloy steel to do better work. Ruggedly constructed they will give long and satisfactory service under the hardest conditions.

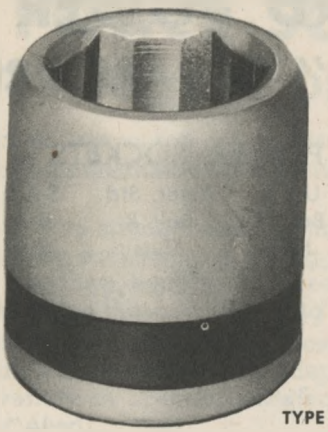

TYPE 2

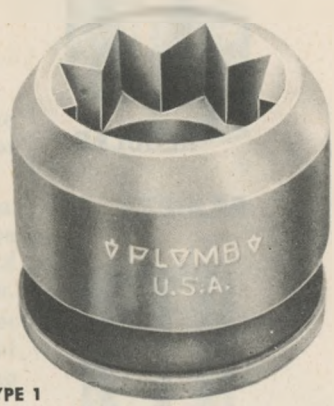


TYPE 1

### 1" SQUARE DRIVE

#### TYPE 1 —8-POINT SQUARE SOCKET

| Plomb No. | Wrench Nominal Inches | Overall Length Inches | Nose Diameter Inches | Body Diameter Inches | Snap-On Number | Chicago Pneumatic No. | | Ingersoll-Rand Number | |
|---|---|---|---|---|---|---|---|---|---|
| 10016S | 1" | 2-1/8" | 1-23/32" | 2-1/8" | 1P732 | C-39499 | WRENCH NO. 365 | 1P732 | WRENCH NO. 534 |
| 10017S | 1-1/16" | 2-1/8" | 1-25/32" | 2-3/16" | 1P734 | C-39496 | | 1P734 | |
| 10018S | 1-1/8" | 2-1/4" | 1-29/32" | 2-1/4" | 1P736 | C-39475 | | 1P736 | |
| 10020S | 1-1/4" | 2-1/4" | 2-1/32" | 2-3/8" | 1P740 | C-39599 | | 1P740 | |
| 10021S | 1-5/16" | 2-5/16" | 2-5/32" | 2-9/16" | 1P742 | C-39476 | | 1P742 | |
| 10023S | 1-7/16" | 2-7/16 | 2-3/8" | 2-5/8" | 1P746 | C-39530 | | 1P746 | |

#### TYPE 2—HEXAGON SOCKET

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 10016 | 1" | 2-1/8" | 1-7/16" | 2-1/8" | 1P323 | C-39643 | WRENCH NO. 365 | 1P323 | WRENCH NO. 534 |
| 10018 | 1-1/8" | 2-3/16" | 1-19/32" | 2-1/8" | 1P363 | C-39644 | | 1P363 | |
| 10020 | 1-1/4" | 2-3/16" | 1-23/32" | 2-1/8" | 1P403 | C-39645 | | 1P403 | |
| 10021 | 1-5/16" | 2-3/16" | 1-13/16" | 2-1/8" | 1P423 | C-39722 | | 1P423 | |
| 10022 | 1-3/8" | 2-1/4" | 1-15/16" | 2-1/4" | | C-39646 | | | |
| 10023 | 1-7/16" | 2-5/16" | 1-15/16" | 2-1/4" | 1P463 | C-39467 | | 1P463 | |
| 10024 | 1-1/2" | 2-5/16" | 2-3/32" | 2-5/16" | 1P483 | C-39497 | | 1P483 | |
| 10026 | 1-5/8" | 2-7/16" | 2-7/32" | 2-7/16" | 1P523 | C-39533 | | 1P523 | |
| 10027 | 1-11/16" | 2-7/16" | 2-5/16" | 2-9/16" | 1P543 | C-39498 | | 1P543 | |
| 10029 | 1-13/16" | 2-9/16" | 2-7/16" | 2-3/4" | 1P583 | C-39474 | | 1P583 | |
| 10030 | 1-7/8" | 2-9/16" | 2-17/32" | 2-3/4" | 1P603 | C-39468 | | 1P603 | |
| 10032 | 2" | 2-11/16" | 2-21/32" | 3" | 1P643 | C-39534 | | 1P643 | |
| 10033 | 2-1/16" | 2-11/16" | 2-3/4" | 3" | 1P663 | C-39723 | | 1P663 | |
| 10035 | 2-3/16" | 2-13/16" | 2-7/8" | 3-1/4" | 1P703 | C-39601 | | 1P703 | |

### 3/4-INCH SQUARE DRIVE

#### TYPE 1—8-POINT SQUARE SOCKET

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 07516S | 1" | 2-1/16" | 1-11/16" | 2" | 1P632 | C-67461 | WRENCH NO. 360 | 1P632 | WRENCH NO. 534 |
| 07517S | 1/16" | 2-1/16" | 1-3/4" | 2-1/8" | 1P634 | C-67462 | | 1P634 | |
| 07518S | 1/8" | 2-3/16" | 1-29/32" | 2-1/4" | 1P636 | C-67463 | | 1P636 | |
| 07520S | 1/4" | 2-3/16" | 2-1/32" | 2-3/8" | 1P640 | C-67465 | | 1P640 | |

#### TYPE 2—HEXAGON SOCKET

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| 07512 | 3/4" | 1-7/8" | 1-5/32" | 1-5/8" | 1P242 | C-67446 | WRENCH NO. 360 | 1P242 | WRENCH NO. 511 |
| 07513 | 13/16" | 1-7/8" | 1-5/32" | 1-5/8" | 1P262 | C-67448 | | 1P262 | |
| 07514 | 7/8" | 2" | 1-1/4" | 1-5/8" | 1P282 | C-62246 | | 1P282 | |
| 07515 | 15/16" | 2" | 1-5/16" | 1-3/4" | 1P302 | C-67449 | | 1P302 | |
| 07516 | 1" | 1-1/16" | 1-7/16" | 1-7/8" | 1P322 | C-67450 | | 1P322 | |
| 07517 | 1-1/16" | 2-1/16" | 1-1/2" | 1-7/8" | 1P342 | C-67451 | | 1P342 | |
| 07518 | 1-1/8" | 2-3/16" | 1-19/32" | 2" | 1P362 | C-67452 | | 1P362 | |
| 07520 | 1-1/4" | 2-3/16" | 1-23/32" | 2-1/8" | 1P402 | C-67454 | | 1P402 | |
| 07521 | 1-5/16" | 2-3/16" | 1-13/16" | 2-1/8" | 1P422 | C-67455 | | 1P422 | |
| 07523 | 1-7/16" | 2-5/16" | 1-15/16" | 2-1/4" | 1P462 | C-67457 | | 1P462 | |

# Industrial STRIKING WRENCH

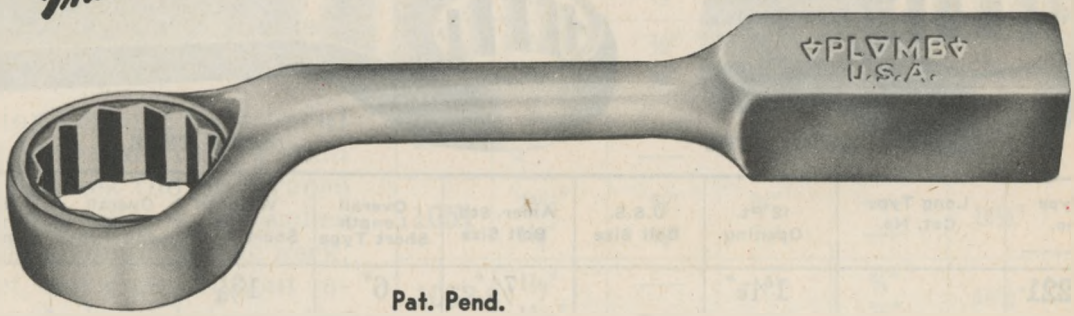


Pat. Pend.

Striking Wrenches are equipped with square striking shank for use in restricted quarters with a hammer. They are offset to allow maximum clearance. Oxidized Blue finish. Made from Alloy Steel.

| Cat. No. | 12 Point Opening | U.S.S. Bolt Size | Amer. Std. Bolt Size | S.A.E. Bolt Size | Overall Length | Head Thickness | Wt. |
|---|---|---|---|---|---|---|---|
| 2613SW | 13/16" | | | 1/2" | 7 1/2" | 5/8" | 1 |
| 2615SW | 15/16" | | | 5/8" | 7 1/2" | 5/8" | 1 1/4 |
| 2617SW | 1 1/16" | 5/8" | | 3/4" | 10 3/4" | 3/4" | 1 1/2 |
| 2618SW | 1 1/8" | | 3/4" | | 10 3/4" | 3/4" | 1 1/2 |
| 2620SW | 1 1/4" | 3/4" | | 7/8" | 11 1/8" | 13/16" | 2 |
| 2621SW | 1 5/16" | | 7/8" | | 11 1/8" | 13/16" | 2 |
| 2623SW | 1 7/16" | 7/8" | | 1" | 12 1/8" | 1" | 3 1/2 |
| 2624SW | 1 1/2" | | 1" | | 12 1/8" | 1" | 3 1/2 |
| 2626SW | 1 5/8" | 1" | | 1 1/8" | 12 1/4" | 1 1/16" | 4 |
| 2627SW | 1 11/16" | | 1 1/8" | | 12 1/4" | 1 1/16" | 4 |
| 2629SW | 1 13/16" | 1 1/8" | | 1 1/4" | 13 7/16" | 1 1/8" | 5 |
| 2630SW | 1 7/8" | | 1 1/4" | | 13 7/16" | 1 1/8" | 5 |
| 2632SW | 2" | 1 1/4" | | 1 3/8" | 13 9/16" | 1 1/4" | 5 1/2 |
| 2635SW | 2 3/16" | 1 3/8" | | 1 1/2" | 13 1/2" | 1 3/8" | 7 3/4 |
| 2638SW | 2 3/8" | 1 1/2" | | | 13 7/8" | 1 1/2" | 8 3/4 |
| 2641SW | 2 9/16" | 1 5/8" | | | 13 7/8" | 1 1/2" | 8 3/4 |
| 2644SW | 2 3/4" | 1 3/4" | | | 16" | 1 7/8" | 12 3/4 |
| 2647SW | 2 15/16" | 1 7/8" | | | 16" | 1 7/8" | 12 3/4 |
| 2650SW | 3 1/8" | 2" | | | 16" | 1 7/8" | 12 3/4 |

Pages 43-44 omitted. See note opposite Page 1.

# Industrial Slugging Wrenches

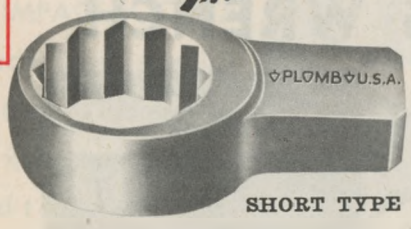

SHORT TYPE

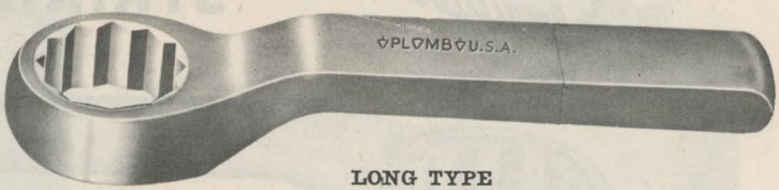

LONG TYPE

| Short Type Cat. No. | Long Type Cat. No. | 12 Pt. Opening | U.S.S. Bolt Size | Amer. Std. Bolt Size | Overall Length Short Type | Weignt in Lbs. Short Type | Overall Length Long Type | Weight in Lbs. Long Type |
|---|---|---|---|---|---|---|---|---|
| **USN 221** | | 1 5/16" | | 7/8" | 6" | 1 3/4 | | |
| **USN 223** | | 1 7/16" | 7/8" | | 6" | 1 7/8 | | |
| **USN 224** | | 1 1/2" | | 1" | 6" | 1 7/8 | | |
| **USN 226** | **USN 326** | 1 5/8" | 1" | | 7" | 3 1/4 | 10 1/2" | 3 1/4 |
| **USN 227** | **USN 327** | 1 11/16" | | 1 1/8" | 7" | 3 1/4 | 10 1/2" | 3 |
| **USN 229** | **USN 329** | 1 13/16" | 1 1/8" | | 7" | 3 1/4 | 10 1/2" | 3 |
| **USN 230** | **USN 330** | 1 7/8" | | 1 1/4" | 7" | 3 1/4 | 10 1/2" | 3 |
| **USN 232** | **USN 332** | 2" | 1 1/4" | | 7" | 5 1/4 | 11" | 5 |
| **USN 235** | **USN 335** | 2 3/16" | 1 3/8" | | 7" | 4 3/4 | 11" | 4 1/2 |
| **USN 236** | **USN 336** | 2 1/4" | | 1 1/2" | 7" | 4 3/4 | 11" | 4 1/2 |
| **USN 238** | **USN 338** | 2 3/8" | 1 1/2" | | 8 1/2" | 8 1/2 | 14 1/2" | 6 1/2 |
| **USN 241** | **USN 341** | 2 9/16" | 1 5/8" | | 8 1/2" | 8 | 14 1/2" | 8 |
| **USN 242** | **USN 342** | 2 5/8" | | 1 3/4" | 8 1/2" | 8 1/4 | 14 1/2" | 8 |
| **USN 244** | **USN 344** | 2 3/4" | 1 3/4" | | 9 1/2" | 12 1/2 | 15 3/4' | 12 |
| **USN 247** | | 2 15/16" | 1 7/8" | | 9 1/2" | 11 1/2 | | |
| **USN 248** | **USN 348** | 3" | | 2" | 9 1/2" | 12 | 15 3/4" | 11 3/4 |
| **USN 250** | **USN 350** | 3 1/8" | 2" | | 9 3/4" | 13 1/2 | 15 3/4" | 10 3/4 |
| **USN 254** | **USN 354** | 3 3/8" | | 2 1/4" | 10" | 15 3/4 | 17 3/8" | 15 1/2 |
| **USN 256** | **USN 356** | 3 1/2" | 2 1/4" | | 10" | 15 1/4 | 17 3/8" | 15 |

Plomb Industrial Slugging Wrenches are designed for all types of heavy industrial work where the working space is extremely limited or highly congested. The 12 point opening fits snugly upon the bolt or nut and will remain in position while being struck with heavy hammer or sledge.

This wrench has been a boon to shipbuilders, installing or repairing machinery in ships, diesel power plants, railroad repair shops, oil refineries or any place where heavy machinery is located.

Patent Pending

## Extra Heavy Duty Double End Box Wrenches

Superior design, masterful forging, have made these Plomb Box Wrenches the preference of Industry. These wrenches are made stronger in the neck, or offset, but done without increasing thickness between the broached opening and the under side of the offset. The crescent shaped neck section is not only stronger but will work in closer places. High pressure flanges and castings with ribs or bosses adjacent to bolt holes are examples of work where minimum rear wall thickness is invaluable. Safety Engineers whole-heartedly endorse these wrenches.

| No | 12 Pt. Openings | U.S.S. Bolt Size | S.A.E. Bolt Size | Am. Std. Bolt Size | Overall Length | Head Thickness | Wt. Lbs. |
|---|---|---|---|---|---|---|---|
| 1036 | 11/16" 7/8" | 3/8" 1/2" | — 9/16" | — 9/16" | 11½" | 1/2" 9/16" | 1 |
| 1041 | 7/8" 1 1/16" | 1/2" 5/8" | 9/16" 3/4" | 9/16" — | 15" | 5/8" 11/16" | 1¾ |
| 1045 | 15/16" 1" | — — | 5/8" 11/16" | 5/8" — | 15" | 5/8" 11/16" | 2 |
| 1051 | 1 1/16" 1¼" | 5/8" 3/4" | 3/4" 7/8" | — — | 16½" | 3/4" 13/16" | 2½ |
| 1053 | 1⅛" 1 5/16" | — — | — — | 3/4" 7/8" | 16½" | 3/4" 13/16" | 2½ |
| 1061 | 1¼" 1 7/16" | 3/4" 7/8" | 7/8" 1" | — — | 20" | 7/8" 15/16" | 4¼ |
| 1063 | 1 7/16" 1⅝" | 7/8" 1" | 1" 1⅛" | — — | 24" | 1" 1 1/16" | 5¼ |
| 1066 | 1 13/16" 2" | 1⅛" 1¼" | 1¼" 1⅜" | — — | 30" | 1⅛" 1¼" | 8¼ |
| 1068 | 2" 2⅜" | 1¼" 1½" | 1⅜" — | — — | 32" | 1¼" 1½" | 12¼ |
| 1069 | 2 3/16" 2⅜" | 1⅜" 1½" | 1½" — | — — | 32" | 1⅜" 1½" | 12¼ |



Patent Pending

## Extra Heavy Duty Box and Spud End Wrench

You will note a new innovation in this wrench, as Plomb has introduced a real safety factor. It is a combination box wrench with tapered spud handle. It will help you make quick work of loosening frozen or corroded bolts or nuts. The spud end is very handy for aligning holes in flanges. Note in particular the clearance provided by the offset head which overcomes the usual clearance problems. These wrenches are ideal for construction work, oil refineries, etc.

| No. | 12 Pt. Opening | U.S.S. Bolt Size | Am. Std. Bolt Size | S.A.E. Bolt Size | Overall Length | Head Thickness | Wt. Lbs. |
|---|---|---|---|---|---|---|---|
| 2613 | 13/16" | | ½" | | 11¾" | 5/8" | 1 |
| 2615 | 15/16" | | 5/8" | 5/8" | 11¾" | 5/8" | 1⅛ |
| 2617 | 1 1/16" | 5/8" | | ¾" | 14¾" | ¾" | 1½ |
| 2618 | 1⅛" | | ¾" | | 14¾" | ¾" | 1½ |
| 2620 | 1¼" | ¾" | | 7/8" | 17" | 13/16" | 2 |
| 2621 | 15/16" | | 7/8" | | 17" | 13/16" | 2 |
| 2623 | 1 7/16" | 7/8" | | 1" | 20½" | 1" | 3½ |
| 2624 | 1½" | | 1" | | 20½" | 1" | 3½ |
| 2626 | 1⅝" | 1" | | 1⅛" | 21½" | 1 1/16" | 4 |
| 2627 | 1 11/16" | | 1⅛" | | 21½" | 1 1/16" | 4 |
| 2629 | 1 13/16" | 1⅛" | | 1¼" | 22¾" | 1⅛" | 5 |
| 2630 | 1⅞" | | 1¼" | | 22¾" | 1⅛" | 5 |
| 2632 | 2" | 1¼" | | 1⅜" | 24½" | 1¼" | 5½ |
| 2635 | 2 3/16" | 1⅜" | | 1½" | 26" | 1⅜" | 7¼ |
| 2638 | 2⅜" | 1½" | | | 27¾" | 1½" | 8½ |
| 2641 | 2 9/16" | 1⅝" | | | 27¾" | 1½" | 8 |
| 2644 | 2¾" | 1¾" | | | 30" | 1⅞" | 14 |
| 2647 | 2 15/16" | 1⅞" | | | 30" | 1⅞" | 14¼ |
| 2650 | 3⅛" | 2" | | | 30" | 1⅞" | 14½ |

# PLUMB TOOL COMPANY

*Streamlined Tools*

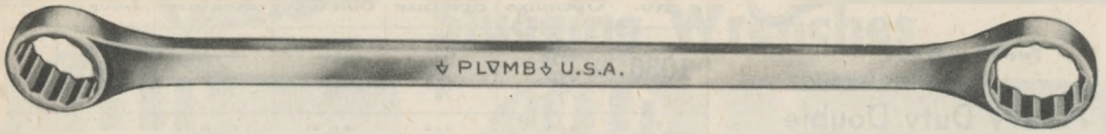


## BOX WRENCHES 15° ANGLE

The wrench of perfect balance. Note in the diagram . . . how the angle of the heads clears obstructions. No more skinned knuckles, shank has rounded edges, will not cut into your hand under heavy pulls.

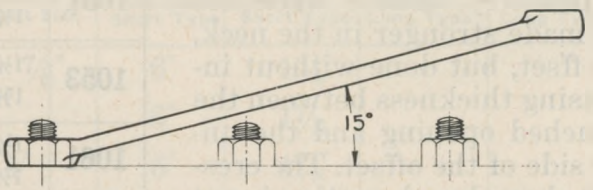


15° OFFSET ALLOWS AMPLE CLEARANCE

| No. | 12-Point Openings | U. S. S. Bolt Size | S. A. E. Bolt Size | Amer. Std. Bolt Size | Overall Length | Head Thickness |
|---|---|---|---|---|---|---|
| 1120 | 5/16" x 3/8" | 1/8"-3/16" | | 5&6-10 | 4" | 1/4"-1/4" |
| 1122 | 3/8" x 7/16" | 3/16" | 1/4" | 10-12&1/4" | 4 1/2" | 9/32"-9/32" |
| 1125 | 7/16" x 1/2" | 1/4" | 1/4"-5/16" | 12&1/4" | 5" | 5/16"-5/16" |
| 1126 | 1/2" x 9/16" | 1/4" | 5/16"-3/8" | 9/16" | 6 1/4" | 11/32"-11/32" |
| 1127 | 1/2" x 19/32" | 1/4"-5/16" | 5/16" | | 7 1/4" | 11/32"-11/32" |
| 1130 | 9/16" x 5/8" | | 3/8"-7/16" | 5/16"-3/8" | 7 3/4" | 3/8"-3/8" |
| 1131 | 5/8" x 3/4" | | 7/16"-1/2" | 3/8"-7/16" | 9" | 13/32"-13/32" |
| 1134 | 5/8" x 11/16" | 3/8" | 7/16" | 3/8" | 9 3/4" | 13/32"-13/32" |
| 1135 | 11/16" x 3/4" | 3/8" | 1/2" | 7/16" | 10 1/2" | 7/16"-7/16" |
| 1136 | 11/16" x 7/8" | 3/8"-1/2" | 9/16" | 9/16" | 10 1/2" | 7/16"-7/16" |
| 1137 | 11/16" x 25/32" | 3/8"-7/16" | | | 11" | 7/16"-7/16" |
| 1139 | 3/4" x 7/8" | 1/2" | 1/2"-9/16" | 7/16"-9/16" | 11 1/2" | 15/32"-15/32" |
| 1140 | 13/16" x 7/8" | 1/2" | 9/16" | 1/2"-9/16" | 12 1/4" | 15/32"-15/32" |
| 1141 | 7/8" x 1 1/16" | 1/2"-5/8" | 9/16"-3/4" | 9/16" | 14" | 1/2"-15/32" |
| 1145 | 15/16" x 1" | | 5/8"-11/16" | 5/8" | 14" | 1/2"-1/2" |
| 1147 | 15/16" x 1 1/16" | 5/8" | 5/8"-3/4" | 5/8" | 15" | 1/2"-1/2" |
| 1150 | 1 1/16" x 1 1/8" | 5/8" | 3/4" | 3/4" | 16" | 17/32"-17/32" |
| 1151 | 1 1/16" x 1 1/4" | 5/8"-3/4" | 3/4"-7/8" | | 17" | 9/16"-9/16" |
| 1155 | 1 1/4" x 1 5/16" | 3/4" | 7/8" | 7/8" | 17 3/4" | 5/8"-5/8" |
| 1160 | 1 1/4" x 1 3/8" | 3/4" | 7/8" | | 18 1/4" | 5/8"-5/8" |
| 1161 | 1 1/4" x 1 7/16" | 3/4"-7/8" | 7/8"-1" | | 19 1/2" | 11/16"-11/16" |
| 1162 | 1 7/16" x 1 1/2" | 7/8" | 1" | 1" | 20 7/8" | 3/4"-3/4" |
| 1163 | 1 7/16" x 1 5/8" | 7/8"-1" | 1"-1 1/8" | | 22 1/2" | 13/16"-13/16" |
| 1164 | 1 5/8" x 1 11/16" | 1" | 1 1/8" | 1 1/8" | 24 1/2" | 7/8"-7/8" |

# POPULAR SETS OF 15° BOX WRENCHES

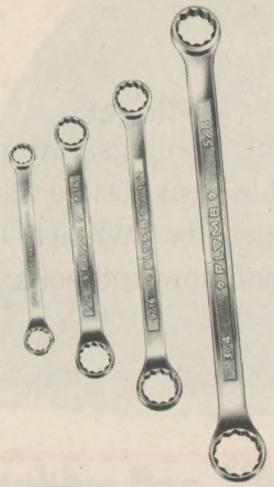

## 1100 BA

Here is a fine basic set of four box wrenches to which you can add more sizes as needed. All of the wrenches in this set are in the most-used range of sizes. Contents follow: No. 1120, 5/16"x 3/8"; No. 1125, 7/16"x1/2"; No. 1126, 1/2"x9/16"; No. 1131, 5/8"x3/4". Packed in cardboard box.

## 1100-F

This large master set leaves little to ask for in an all-around assortment of Plomb's famous line of Double End Box Wrenches. 10 Wrenches that will give you opening sizes to fit most any nut or bolt that comes along. Specifications follow: No. 1120, 5/16"x3/8"; No. 1122, 3/8"x7/16"; No. 1125, 7/16"x1/2"; No. 1126, 1/2"x9/16"; No. 1130, 9/16"x5/8"; No. 1131, 5/8"x3/4"; No. 1135, 11/16"x3/4"; No. 1140, 13/16"x7/8"; No. 1145, 15/16"x1"; No. 1150, 1-1/16"x 1-1/8"; No. 2413, Kit. Wt., 4 lbs.

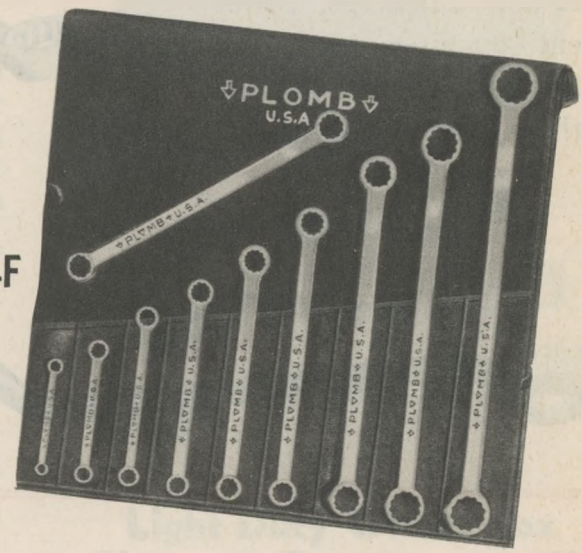


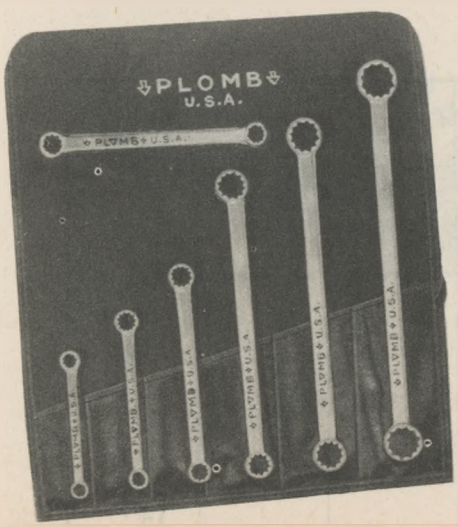


## 1100-H

You can't afford to be without this very popular set of Plomb Double End Box Wrenches. 7 wrenches without a duplication in the 14 assorted opening sizes. Contents are: No. 1120, 5/16"x3/8"; No. 1125, 7/16"x1/2"; No. 1130, 9/16"x5/8"; No. 1135, 11/16"x3/4"; No. 1140, 13/16"x 7/8"; No. 1145, 15/16"x1"; No. 1150, 1-1/16"x1-1/8"; No. 2406, Leatherette Kit. Wt., 3½ lbs.

**Cannot be shipped complete from factory but can be assembled by distributor.**

PLUMB TOOL COMPANY

*Streamlined Tools*

# STREAMLINED OFFSET BOX WRENCHES

## Midget

6-point openings. Amply offset to clear obstructions. A superb box wrench for all small nuts and bolts.

## Stubby Type

12-point openings. Different openings each end. Short type lets you get into those tight places easily.




## Standard Long Type

12-point openings, 60° angle offset on each end. Extra long. No duplication of opening sizes. Ample knuckle clearance.

## SPECIFICATIONS

| Midget Cat. No. | Stubby Cat. No. | Std. Long Type Cat. No. | 6-Point Openings | 12-Point Openings | Overall Length Midget | Overall Length Stubby | Overall Length Std. Long Type |
|---|---|---|---|---|---|---|---|
| * 8112 | | | 3/16" x 13/64" | | 2 13/16" | | |
| * 8117 | | | 7/32" x 15/64" | | 3 3/32" | | |
| * 8122 | | | 1/4" x 9/32" | | 3 3/8" | | |
| * 8127 | | | 5/16" x 11/32" | | 3 3/4" | | |
| | 8160 | 8180 | | 3/8" x 7/16" | | 5" | 7 3/4" |
| | 8161 | 8181 | | 1/2" x 9/16" | | 5 1/2" | 9 3/4" |
| | 8162 | 8182 | | 5/8" x 11/16" | | 6" | 10" |
| | 8163 | | | 3/4" x 13/16" | | 6 1/2" | |
| | | 8183 | | 3/4" x 25/32" | | | 11" |
| | | 8184 | | 13/16" x 7/8" | | | 12 3/4" |
| | | 8185 | | 15/16" x 1" | | | 14" |

*Temporarily discontinued

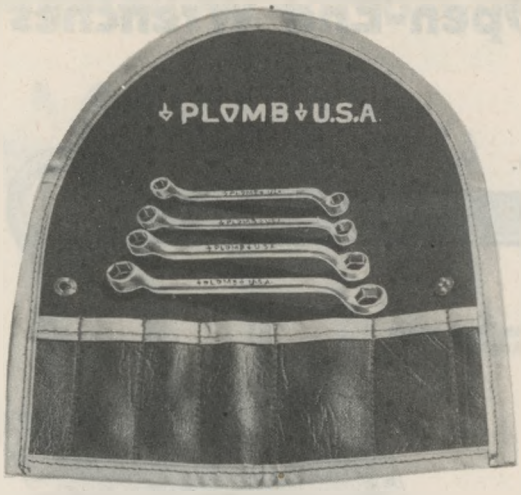


## Midget Box Wrench Set No. 8100-E *

A superb set of Midget Box Wrenches that will find daily use in your work. Especially handy on little bolts and nuts. This set of 4 wrenches gives you a wide range of opening sizes. Specifications below: *Temporarily discontinued

| Tool No. | 6 Pt. Openings |
|---|---|
| 8112 | 3/16" x 13/64" |
| 8117 | 7/32" x 15/64" |
| 8122 | 1/4" x 9/32" |
| 8127 | 5/16" x 11/32" |
| 2411 | L'ette Kit. Wt., 1 lb. 2 oz. |

## Stubby Box Wrench Set No. 8100-A

One of the latest additions to the Plomb line was this type of Offset Box Wrench. Gets into those hard-to-reach places. This set will just about cover your every requirement. The contents are as follows:

| Tool No. | 12 Pt. Openings | Length |
|---|---|---|
| 8160 | 3/8" x 7/16" | 5" |
| 8161 | 1/2" x 9/16" | 5½" |
| 8162 | 5/8" x 11/16" | 6" |
| 8163 | 3/4" x 13/16" | 6½" |

Canvas Bag Free. Wt., 1½ lbs.

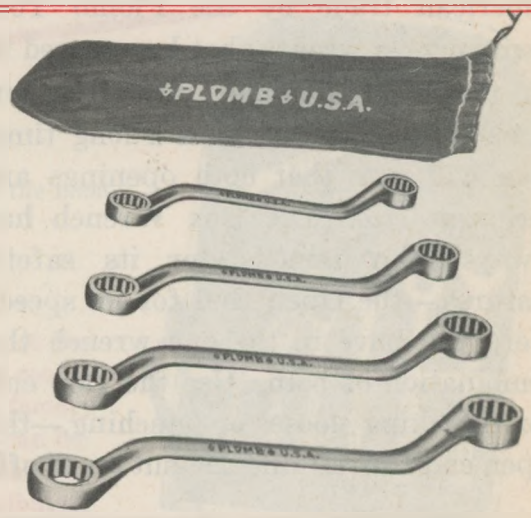


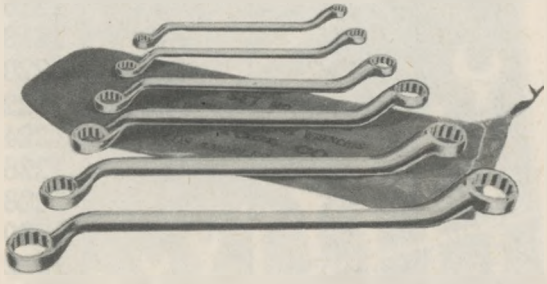

Sets on this page cannot be shipped complete from factory but can be assembled by Distributor.

## Light Duty Offset Box Wrench Set No. 8100-B

This set covers the most popular opening sizes from 3/8" to 1". One cannot afford to be without this set of wrenches. They will pay for themselves in no time by making your work quicker and easier. The set is listed below:

| Tool No. | 12 Pt. Openings |
|---|---|
| 8180 | 3/8" x 7/16" |
| 8181 | 1/2" x 9/16" |
| 8182 | 5/8" x 11/16" |
| 8183 | 3/4" x 25/32" |
| 8184 | 13/16" x 7/8" |
| 8185 | 15/16" x 1" |

Canvas Bag Free. Wt., 3½ lbs.

# PLOMB TOOL COMPANY

*Streamlined Tools*

## Combination Box and Open-End Wrenches

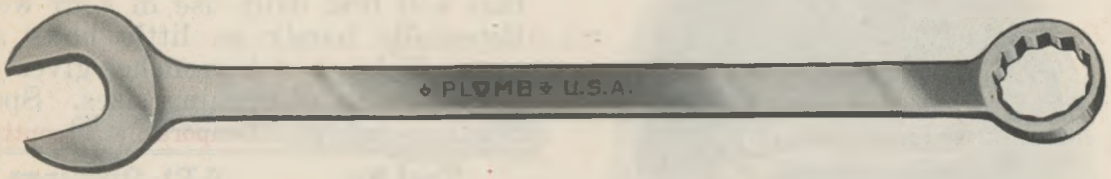


Both openings same size, Box End offset 15°: Open End 15° Angle.

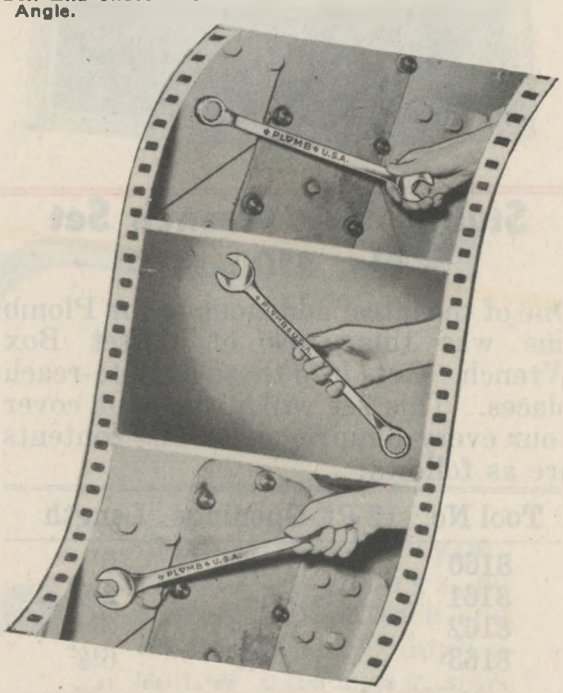

The Combination Open End and Box Wrench was first introduced to the American trade by the Plomb Tool Company—a wrench that has proved to be the most popular innovation in wrench manufacturing in a long time. You will note that both openings are the same size. The Box Wrench has always been famous for its safety features,—the Open End for its speed. Here you have in the one wrench the combination of both. Use the Box end for breaking loose or cinching,—the Open end for running the nut on or off.

| No. | Both Openings | Overall Length | Box Head Thickness | Open Head Thickness | U.S.S. Bolt Size | S.A.E. Bolt Size | Amer. Std. Bolt Size | No. |
|---|---|---|---|---|---|---|---|---|
| 1210 | 5/16" | 3 1/2" | 7/32" | 3/16" | 1/8" | ..... | 5 & 6 | 1210 |
| 1212 | 3/8" | 4 1/2" | 1/4" | 1/4" | 3/16" | ..... | 10 | 1212 |
| 1214 | 7/16" | 5 1/2" | 9/32" | 1/4" | ..... | 1/4" | 12 & 1/4" | 1214 |
| 1216 | 1/2" | 6 1/4" | 5/16" | 1/4" | 1/4" | 5/16" | ..... | 1216 |
| 1218 | 9/16" | 7" | 11/32" | 1/4" | ..... | 3/8" | 5/16" | 1218 |
| 1220 | 5/8" | 7 3/4" | 3/8" | 9/32" | ..... | 7/16" | 3/8" | 1220 |
| 1222 | 11/16" | 8 1/2" | 13/32" | 5/16" | 3/8" | ..... | ..... | 1222 |
| 1224 | 3/4" | 9 1/4" | 7/16" | 11/32" | ..... | 1/2" | 7/16" | 1224 |
| 1226 | 13/16" | 10 1/4" | 15/32" | 11/32" | ..... | ..... | 1/2" | 1226 |
| 1228 | 7/8" | 11 1/4" | 15/32" | 11/32" | 1/2" | 9/16" | 9/16" | 1228 |
| 1230 | 15/16" | 12 1/4" | 1/2" | 3/8" | ..... | 5/8" | 5/8" | 1230 |
| 1232 | 1" | 13 3/8" | 1/2" | 13/32" | ..... | 11/16" | ..... | 1232 |
| 1234 | 1 1/16" | 14 1/2" | 17/32" | 13/32" | 5/8" | 3/4" | ..... | 1234 |
| 1236 | 1 1/8" | 15 3/4" | 17/32" | 7/16" | ..... | ..... | 3/4" | 1236 |
| 1240 | 1 1/4" | 17 1/2" | 5/8" | 1/2" | 3/4" | 7/8" | ..... | 1240 |
| 1242 | 1 5/16" | 18" | 5/8" | 17/32" | ..... | ..... | 7/8" | 1242 |
| 1244 | 1 3/8" | 18 1/2" | 5/8" | 9/16" | | ..... | ..... | 1244 |
| 1246 | 1 7/16" | 19" | 3/4" | 9/16" | 7/8" | 1" | ..... | 1246 |

# Combination Open-End and Box Wrench Sets

Pages 52-53 omitted. See note opposite Page 1.

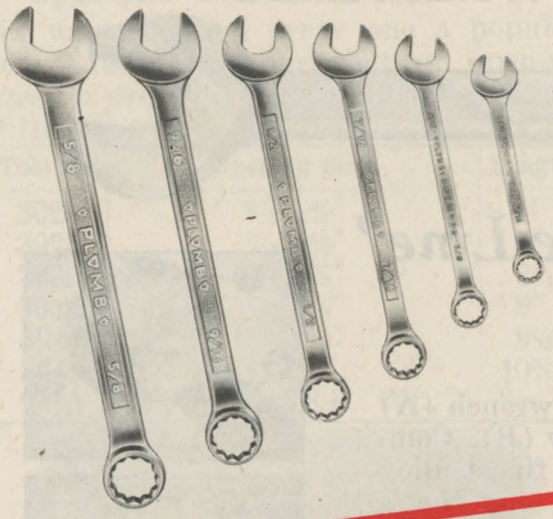

## Set No. 1200 BA

The six wrenches in this popular basic set have the most-used opening sizes. Packed in cardboard box. Contents follow:

| Tool No. | Opening Size |
|---|---|
| 1210 | 5/16" |
| 1212 | 3/8" |
| 1214 | 7/16" |
| 1216 | 1/2" |
| 1218 | 9/16" |
| 1220 | 5/8" |

## Set No. 1200-G

Eight wrenches in all—an all around assortment of the most useful openings. Contents are as follows: Wt. 2 lbs.

| Tool No. | Opening Size |
|---|---|
| 1210 | 5/16" |
| 1212 | 3/8" |
| 1214 | 7/16" |
| 1216 | 1/2" |
| 1218 | 9/16" |
| 1220 | 5/8" |
| 1222 | 11/16" |
| 1224 | 3/4" |
| 2406 | Leatherette Kit |

**Cannot be shipped complete from factory but can be assembled by distributor.**

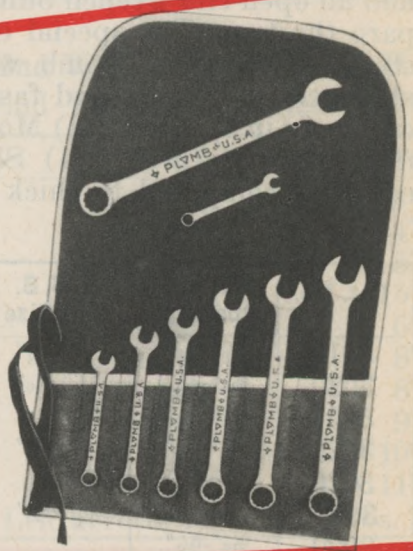

## Set No. 1200-F

Here is your Master Combination Box and Open-End Wrench Set—15 opening sizes as listed below: Wt. 8¾ lbs.

| Tool No. | Opening Size |
|---|---|
| 1210 | 5/16" |
| 1212 | 3/8" |
| 1214 | 7/16" |
| 1216 | 1/2" |
| 1218 | 9/16" |
| 1220 | 5/8" |
| 1222 | 11/16" |
| 1224 | 3/4" |
| 1226 | 13/16" |
| 1228 | 7/8" |
| 1230 | 15/16" |
| 1232 | 1" |
| 1234 | 1 1/16" |
| 1236 | 1 1/8" |
| 1240 | 1 1/4" |
| 2413 | Leatherette Kit |

PLOMB TOOL COMPANY

*Streamlined Tools*

# 15° OPEN END WRENCHES

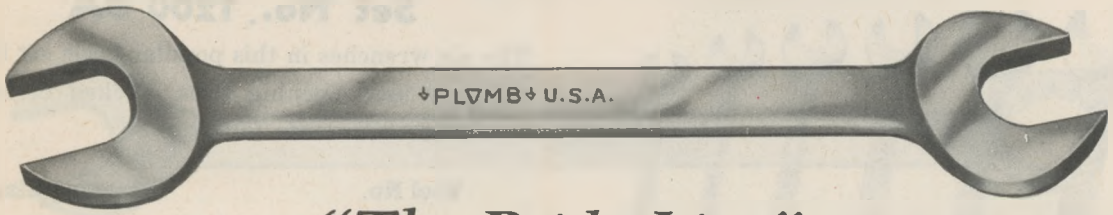


## *"The Pride Line"*




A




B

Shown at the right is an ordinary open-end wrench (A) and an open-end wrench built the Plomb way (B). Compare the two. The special engineering and finest alloy steel used in the Plomb wrench result in one that's stronger, and easier and faster to work with. (1) Less overhang in opening. (2) More accurate fit. (3) Smaller, more compact head. (4) Slender shank with rounded edges as compared to thick sharp edged shank.

| Cat. No. | Milled Openings | U. S. S. Bolt Size | S. A. E. Bolt Size | Amer. Std. Bolt Size | Overall Length | Head Thickness | Cat. No. |
|---|---|---|---|---|---|---|---|
| 3018 | 1/4"-5/16" | 1/8" | | 4-5&6 | 3 1/2" | 5/32" | 3018 |
| 3020 | 5/16"-3/8" | 1/8"-3/16" | | 5&6-10 | 4" | 3/16" | 3020 |
| 3021 | 3/8"-7/16" | 3/16" | 1/4" | 10-12&1/4" | 4 1/2" | 7/32" | 3021 |
| 3025 | 7/16"-1/2" | 1/4" | 1/4"-5/16" | 12&1/4" | 5" | 7/32" | 3025 |
| 3026 | 1/2"-9/16" | 1/4" | 5/16"-3/8" | 5/16" | 5 1/2" | 1/4" | 3026 |
| 3027 | 1/2"-19/32" | 1/4"-5/16" | 5/16" | | 6 1/4" | 9/32" | 3027 |
| 3030 | 9/16"-5/8" | | 3/8"-7/16" | 5/16"-3/8" | 6 1/4" | 9/32" | 3030 |
| 3031 | 5/8"-3/4" | | 7/16"-1/2" | 3/8"-7/16" | 8" | 5/16" | 3031 |
| 3032 | 19/32"-25/32" | 5/16"-7/16" | | | 8" | 5/16" | 3032 |
| 3034 | 5/8"-11/16" | 3/8" | 7/16" | 3/8" | 8" | 5/16" | 3034 |
| 3035 | 11/16"-3/4" | 3/8" | 1/2" | 7/16" | 8" | 5/16" | 3035 |
| 3036 | 11/16"-7/8" | 3/8"-1/2" | 9/16" | 9/16" | 9 1/8" | 11/32" | 3036 |
| 3037 | 11/16"-25/32" | 3/8"-7/16" | | | 8" | 5/16" | 3037 |
| 3039 | 3/4"-7/8" | 1/2" | 1/2"-9/16" | 7/16"-9/16" | 9 1/8" | 11/32" | 3039 |
| 3040 | 13/16"-7/8" | 1/2" | 9/16" | 1/2"-9/16" | 9 1/8" | 11/32" | 3040 |
| 3041 | 7/8"-1 1/16" | 1/2"-5/8" | 9/16"-3/4" | 9/16" | 11 3/4" | 5/16" | 3041 |
| 3045 | 15/16"-1" | | 5/8"-11/16" | 5/8" | 10 5/16" | 3/8" | 3045 |
| 3047 | 15/16"-1 1/16" | 5/8" | 5/8"-3/4" | 5/8" | 11 3/4" | 13/32" | 3047 |
| 3050 | 1 1/16"-1 1/8" | 5/8" | 3/4" | 3/4" | 11 3/4" | 13/32" | 3050 |
| 3051 | 1 1/16"-1 1/4" | 5/8"-3/4" | 3/4"-7/8" | | 12 5/8" | 1/2" | 3051 |
| 3055 | 1 1/4"-1 5/16" | 3/4" | 7/8" | 7/8" | 15 1/2" | 29/16" | 3055 |
| 3060 | 1 3/8"-1 7/16" | 7/8" | 1" | | 15 1/2" | 9/16" | 3060 |
| 3061 | 1 1/4"-1 7/16" | 3/4"-7/8" | 7/8"-1" | | 15 1/2" | 9/16" | 3061 |
| 3062 | 1 3/8" x 1 1/2" | | | 1" | | | 3062 |
| 3065 | 1 7/16" x 1 5/8" | 7/8"-1" | 1"-1 1/8" | | 17" | 5/8" | 3065 |
| 3070 | 1 1/2" x 1 5/8" | 1" | 1 1/8" | 1" | | | 3070 |

PREFERRED BY MEN WHO EARN THEIR LIVING WITH TOOLS

**Cannot be shipped complete from factory but can be assembled by distributor.**

## Open-End Wrench Set No. 3000-B

Six wrenches and every one a popular item — the best assortment of opening sizes for everyday use. Sizes and contents of this set are listed below:

| Tool No. | Opening Sizes | Length |
|---|---|---|
| 3020 | 5/16" x 3/8" | 4" |
| 3025 | 7/16" x 1/2" | 5" |
| 3030 | 9/16" x 5/8" | 6¼" |
| 3035 | 11/16" x 3/4" | 8" |
| 3040 | 13/16" x 7/8" | 9⅛" |
| 3045 | 15/16" x 1" | 10 5/16" |
| 2405 | Leatherette Kit. Wt., 2½ lbs. | |

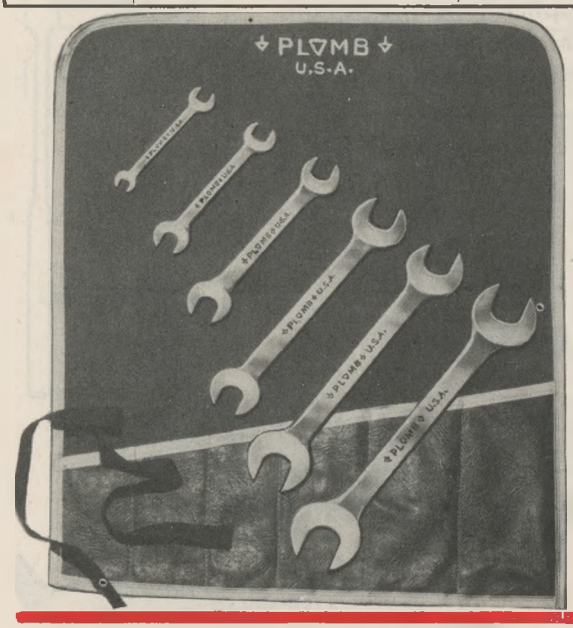


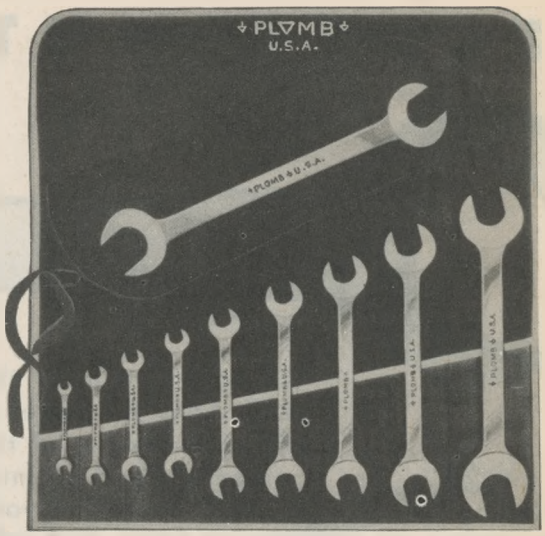


## Open-End Wrench Set No. 3000-H

10 Open-End Wrenches — selected sizes.

| Tool No. | Opening Sizes | Length |
|---|---|---|
| 3018 | ¼" x 5/16" | 3½" |
| 3020 | 5/16" x 3/8" | 4" |
| 3025 | 7/16" x ½" | 5" |
| 3026 | ½" x 9/16" | 5½" |
| 3030 | 9/16" x 5/8" | 6¼" |
| 3031 | 5/8" x 3/4" | 8" |
| 3035 | 11/16" x 3/4" | 8" |
| 3040 | 13/16" x 7/8" | 9⅛" |
| 3045 | 15/16" x 1" | 10 5/16" |
| 3050 | 1 1/16" x 1 1/8" | 11¾" |
| 2406 | Leatherette Kit. Wt., 4 lbs. | |

## Open-End Wrench Set No. 3000 BA

This set is very popular because it includes four open-end wrenches in the most-used range of sizes. It is a fine basic set to which more wrenches can be added later. Packed in cardboard box.

| Tool No. | Opening Sizes | Length |
|---|---|---|
| 3018 | ¼" x 5/16" | 3½" |
| 3021 | 3/8" x 7/16" | 4½" |
| 3026 | ½" x 9/16" | 5½" |
| 3031 | 5/8" x 3/4" | 8 |

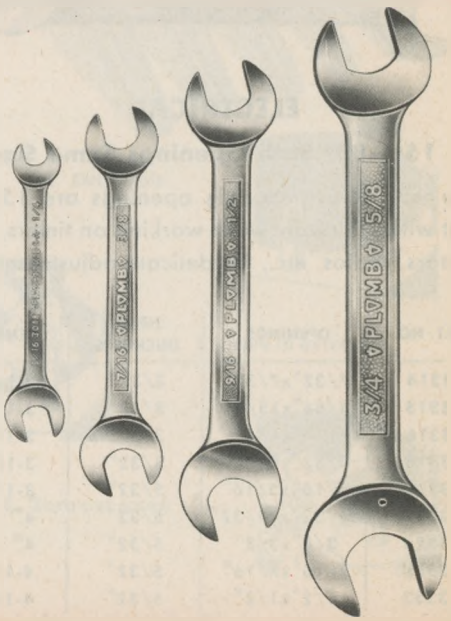

# FLARE NUT WRENCHES

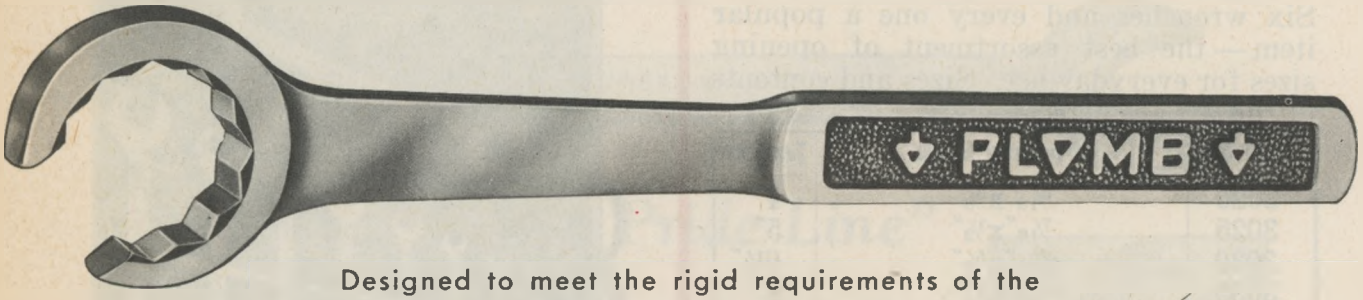


Designed to meet the rigid requirements of the U.S. Army Air Forces and the U.S. Navy.

The primary use of the flare nut wrenches is in the assembly and maintenance of all types of lines, including fluid, air, gas, etc. It has a wide variety of applications in aviation, automotive, air conditioning fields, and refrigeration, as well as on such equipment as compressors and various pressure instruments. As illustrated, the head is flat and based on a modified 12 point design, with an opening which allows access to the fitting around tubing. The possibility of damage to the fitting is remote, because the wrench has better contact with the nut and cannot slip and chew it.

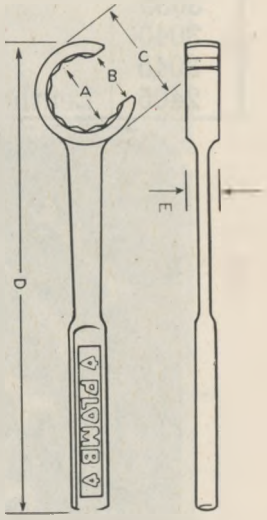


| PART NO. | A SIZE OPENING | B CLEARANCE | C OUTSIDE DIA. | D OVERALL LENGTH | E HEAD THICKNESS |
|---|---|---|---|---|---|
| 3712 | 3/8" | 7/32" | 13/16" | 6-1/2" | 3/8" |
| 3714 | 7/16' | 9/32" | 13/16" | 6-1/2" | 3/8" |
| 3716 | 1/2" | 3/8" | 31/32" | 6-7/8" | 7/16" |
| 3718 | 9/16" | 7/16" | 31/32" | 6-7/8" | 7/16" |
| 3720 | 5/8" | 15/32" | 1-1/8" | 7-1/8" | 1/2" |
| 3722 | 11/16" | 17/32" | 1-1/8" | 7-1/8" | 9/16" |
| 3724 | 3/4" | 9/16" | 1-9/32" | 7-7/16" | 9/16" |
| 3728 | 7/8" | 11/16" | 1-15/32" | 7-3/4" | 5/8" |
| 3730 | 15/16" | 23/32" | 1-15/32" | 7-3/4" | 5/8" |
| 3732 | 1" | 3/4" | 1-19/32" | 8-1/8" | 3/4" |
| 3734 | 1-1/16" | 25/32" | 1-19/32" | 8-1/8" | 3/4" |
| 3736 | 1-1/8" | 27/32" | 1-25/32" | 8-7/16" | 7/8" |

# MIDGET WRENCHES







## ELECTRICAL

**15°—80° Both Openings Same Size**

You will note the angle openings are 15-80°. Just what you want when working on timers, generators, radios, etc., for delicate adjustments.

| CAT. NO. | OPENINGS | HEAD THICKNESS | LENGTH |
|---|---|---|---|
| 3314 | 7/32"x7/32" | 3/32" | 3-1/4" |
| 3315 | 15/64"x15/64" | 3/32" | 3-1/4" |
| 3316 | 1/4"x1/4" | 3/32" | 3-1/4" |
| 3318 | 9/32"x9/32" | 5/32" | 3-1/2" |
| 3320 | 5/16"x5/16" | 5/32" | 3-1/2" |
| 3322 | 11/32"x11/32" | 5/32" | 4" |
| 3324 | 3/8"x3/8" | 5/32" | 4" |
| 3328 | 7/16"x7/16" | 5/32" | 4-1/2" |
| 3332 | 1/2"x1/2" | 5/32" | 4-1/2" |

## OBSTRUCTION

Paired openings, different size each end but with alternate angles on next wrench so all eight openings are provided in both 15° and 60° angles.

| CAT. NO. | 15° OPENING | 60° OPENING | HEAD THICKNESS | OVERALL LENGTH |
|---|---|---|---|---|
| 3210 | 13/64" | 15/64" | 3/32" | 3" |
| 3211 | 15/64" | 13/64" | 3/32" | 3" |
| 3215 | 7/32" | 1/4" | 3/32" | 3" |
| 3216 | 1/4" | 7/32" | 3/32" | 3" |
| 3220 | 9/32" | 5/16" | 5/32" | 3-1/2" |
| 3221 | 5/16" | 9/32" | 5/32" | 3-1/2" |
| 3225 | 11/32" | 3/8" | 9/64" | 3-3/4" |
| 3226 | 3/8" | 11/32" | 9/64" | 3-3/4" |

## Obstruction Box Wrenches

For turning nuts where obstructions prevent easy access with straight wrenches. 1" clearance at middle. 12-point openings.

| No. | 12-point Openings | Overall Length | Wt. |
|---|---|---|---|
| 1725 | 7/16" x 1/2" | 5 3/4" | 3 oz. |
| 1730 | 9/16" x 5/8" | 6 1/2" | 4 oz. |

## Tappet Wrenches

Note arrangement of openings—just right for easy working, yet six wrenches are equal to much larger sets of other makes.

| No. | Openings | Overall Length | Head Thickness | S. A. E. |
|---|---|---|---|---|
| 3425 | 7/16"-1/2" | 9" | 3/16" | 1/4" x 5/16" |
| 3426 | 1/2"-9/16" | 9" | 3/16" | 5/16" x 3/8" |
| 3430 | 9/16"- 5/8" | 9" | 3/16" | 3/8" x 7/16" |
| 3431 | 17/32"-5/8" | 9" | 3/16" | —x 7/16" |
| 3435 | 11/16"-3/4" | 9" | 7/32" | —x 1/2" |
| 3440 | 13/16"-7/8" | 9" | 15/64" | —x 9/16" |

NO. 3400E—TAPPET WRENCH SET
Includes Wrenches 3425, 3426, 3430 and 3435 in Leatherette Kit 2405.

## Screw Extractors

| No. | Size of Small End | Size of Shank | Overall Length | U.S.S. Screw Size | Drill Size | Min. Depth of Hole | Pipe Size |
|---|---|---|---|---|---|---|---|
| 9521 | 1/8" | 3/16" | 2 5/16" | 1/4" to 5/16" | 1/8" | 3/8" | ..... |
| 9522 | 11/64" | 3/16" | 2 5/8" | 3/8" | 3/16" | 1/2" | ..... |
| † 9523 | 7/32" | 1/4" | 2 7/8" | 7/16" | 15/64" | 1/2" | 1/8" |
| 9524 | 19/64" | 5/16" | 3" | 1/2" | 5/16" | 1/2" | 1/4" |
| 9525 | 11/32" | 3/8" | 3 1/4" | 9/16" to 5/8" | 13/32" | 9/16" | 3/8" |

†For broken Alemite fittings.

**No. 9500A—Nos. 9521 to 9525, inclusive, 5 extractors in wooden slide cover box. Weight 1/2 lb.**

## For Pipe and Fittings

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 9526 | 1/2" | 1/2" | 4 1/2" | 3/4" | 9/16" | 11/16" | 1/2" |
| 9527 | 19/32" | 5/8" | 5" | 7/8" | 5/8" | 11/16" | 1/2" |
| 9528 | 23/32" | 3/4" | 5 1/2" | 1" to 1 1/4" | 3/4" | 7/8" | 3/4" |
| 9529 | 31/32" | 1" | 5 1/2" | 1 3/8" to 1 1/2" | 1" | 3/4" | 1" |

1. Drill Hole

2. Drive in extractor

3. Turn out screw

# PLOMB TOOL COMPANY

*Streamlined Tools*




No. 4515

No. 4532

## STUD PULLERS

### ← New Detachable Wedge Type

Latest development in stud pullers. No. 4515 for 1/4" to 5/8" studs; No. 4532 for studs from 5/8" to 1" turns in a smaller circle and will work much closer to obstructions.

Set-screw in side of stud puller prevents loss by keeping wedges in body when not in use.

No. 4515 is 1-3/16" in diameter, 3 1/2" long and has 1/2" square service connection.

No. 4532 is 2 1/8" in diameter, 5 1/2" long, and has 3/4" square service connection.

Both sizes will take the longest studs.

### Standard 1/2" Square Drive

| No. | Description | Wt. lbs. |
|---|---|---|
| 4515 | Stud Puller Complete with 4516 and 4517 Wedges; Capacity, 1/4" to 5/8" Studs | 1 1/4 |
| 4516 | Thick Wedge, Capacity 1/4" to 7/16" | |
| 4517 | Thin Wedge, Capacity 1/2" to 5/8" | |

### Heavy Duty 3/4" Square Drive

| | | |
|---|---|---|
| 4532 | Heavy Duty Stud Puller, with 4533 and 4534 Wedges; Capacity 5/8" to 1" Studs | 4 1/2 |
| 4533 | Thick Wedge, Capacity 5/8" to 3/4" | |
| 4534 | Thin Wedge, Capacity 3/4" to 1" | |

### No. 2151—Wheel Lug Nut Wrench

Speedy, four-way rim wrench, forged for extra strength. Hex openings of 5/8", 3/4", 13/16" and 7/8" fit lug nuts of most cars and trucks. Length —16".

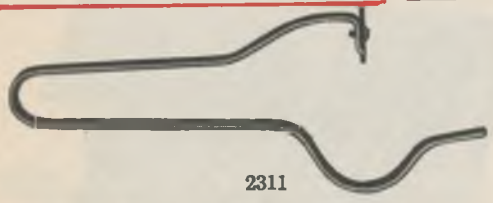

2311

### Adjustable Ring Groove Cleaners

**No. 2311**—Cleans 3/32", 1/8", 5/32" and 3/16" grooves with single tool. 4-way cutter is finest alloy steel. Can be resharpened with file. Complete with cutter. No. 2312—Extra Cutter.

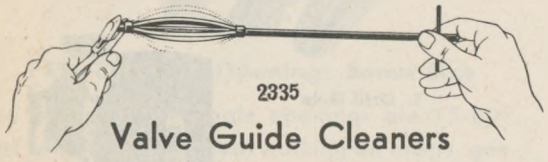

2335

### Valve Guide Cleaners

**No. 2335**—An inexpensive new valve guide cleaner that is adjustable, by simply turning nut, to all sizes of valve guides. Length, 9 3/4".

2337

### Flexible Carbon Scrapers

**No. 2337**—The 10 flexible blades of round spring steel. Sliding band regulates flexibility of edge. 1" wide, 9" overall length.

2336

### Gasket Scrapers

**No. 2336**—Has many uses, such as scraping carbon, cutting wood, removing shellacked gaskets. Blade 1 1/2" wide; overall length, 11 1/8".

# ENGINE TOOLS

**6523**

**6539**



**6528**




**5421**

**5444**




**1730**

**5438-5538**

## No. 6522—Connecting Rod Socket

For Cadillac and LaSalle connecting rod nuts. Hexagon, 7/16" opening, for ½" drive.

## No. 6734—Valve Adjuster

For speed, care and accuracy when adjusting overhead valves. Use any standard socket. Loosen lock nut first, then operate driver for adjustment, setting valve clearance with Plomb Feeler Gauges.

## No. 6526—Carburetor Jet Wrench

Ford special carburetor jet wrench, for Chandler-Grove carburetors.

| NO. | DESCRIPTION |
|---|---|
| 6523 | **V8 CON. ROD NUT SOCKET**—This 9/16" hexagon thin-nose socket is absolutely essential when working on V8 con. rods. 1/2" square drive. |
| 6539 | **V8-85 VALVE LIFTER**—Powerful, simple, with long leverage to break loose the toughest guides. Push guide down to remove keeper, then pry, with opposite block as fulcrum, to force guide out. 30" long, 3/4" stock. |
| 6528 | **CARBURETOR JET WRENCH**—For nearly all types of Stromberg carburetors. Turns easily with cross pin and knurled shank. |
| 5421 | **STANDARD SOCKET 1/2" SQUARE DRIVE**—Opening Size, 21/32; Overall Length, 1 3/8; Inside Clearance, 3/4. |
| 5444 | **DRAG LINK SCREWDRIVER**—Many uses especially on any large slotted screws and used with most 1/2" drive attachments. Bit 3/4" Wide, Length 1 9/16". |
| 1730 | **OBSTRUCTION BOX WRENCH**—For turning nuts where obstructions prevent easy access with straight wrenches. 1" clearance at middle. 12-point openings. 9/16" x 5/8". Overall Length, 6 1/2". Weight, 4 oz. |
| 5438<br>5538 | **1/2" AND 3/4" SQUARE DRIVE SOCKETS** 5438—1 3/16", 12-point. 5538—1 3/16", 12-point. Overall Length, 2 5/16". Inside Clearance, 1 9/16". |

See Page 67 for Additional Engine Tools

# PLOMB TOOL COMPANY

*Streamlined Tools*

## Feeler Gauges - Accurately Ground, Correctly Heat Treated

### Standard Thickness Gauges

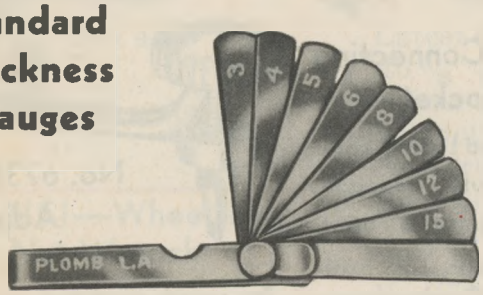


No. 000A—Set of the following 9 gauges, one each: Nos. 003, 004, 005, 006, 008, 010, 012, 015 and 018, in No. 000C Holder.

No. 000C—Holder only, without blades.

| No. | Blade Thickness | Width Blade | Length Blade |
|---|---|---|---|
| 0015 | .0015" | ½" | 3¼" |
| 003 | .003" | ½" | 3¼" |
| 004 | .004" | ½" | 3¼" |
| 005 | .005" | ½" | 3¼" |
| 006 | .006" | ½" | 3¼" |
| 007 | .007" | ½" | 3¼" |
| 008 | .008" | ½" | 3¼" |
| 009 | .009" | ½" | 3¼" |
| 010 | .010" | ½" | 3¼" |
| 011 | .011" | ½" | 3¼" |
| 012 | .012" | ½" | 3¼" |
| 013 | .013" | ½" | 3¼" |
| 014 | .014" | ½" | 3¼" |
| 015 | .015" | ½" | 3¼" |
| 016 | .016" | ½" | 3¼" |
| 018 | .018" | ½" | 3¼" |
| 020 | .020" | ½" | 3¼" |
| 022 | .022" | ½" | 3¼" |
| 025 | .025" | ½" | 3¼" |
| 030 | .030" | ½" | 3¼" |
| 032 | .032" | ½" | 3¼" |
| 035 | .035" | ½" | 3¼" |
| 040 | .040" | ½" | 3¼" |

### Step-Cut Feeler Gauges

Each Blade has two different thicknesses, carefully ground and exactly true. A quality far superior to those usually offered to the trade; heat-treated to remain true after long use.

| No. | Thicknesses | Width Blade | Length Blade |
|---|---|---|---|
| 004/6 | .004"—.006" | ½" | 3¼" |
| 005/7 | .005"—.007" | ½" | 3¼" |
| 006/8 | .006"—.008" | ½" | 3¼" |
| 007/9 | .007"—.009" | ½" | 3¼" |
| 008/10 | .008"—.010" | ½" | 3¼" |
| 009/11 | .009"—.011" | ½" | 3¼" |
| 010/12 | .010"—.012" | ½" | 3¼" |
| 011/13 | .011"—.013" | ½" | 3¼" |

No. 000B—Set of 4 Step-Cut Gauges: Nos. 004/6, 006/8, 008/10, 010/12, with No. 000C Holder.

No. 000C—Holder only.

### No. 000E—Brake Gauge Set

(Blades not sold separately)

Consists of 9 blades, 3/16" wide by 4" long, of the following thicknesses: .006", .008", .010", .012", .014", .016", .018", .020" and .025".

### Feeler Gauges in 12" Strips

| No. | Blade Thickness | Width Blade | Length Strip |
|---|---|---|---|
| 0015L | 0015" | ½ | 12" |
| 002L | 002" | ½ | 12" |
| 003L | 003" | ½ | 12" |
| 004L | 004" | ½ | 12" |
| 005L | 005" | ½ | 12" |
| 006L | 006" | ½ | 12" |
| 008L | 008" | ½ | 12" |
| 010L | 010" | ½ | 12" |
| 012L | 012" | ½ | 12" |
| 013L | 013" | ½ | 12" |
| 015L | 015" | ½ | 12" |
| 018L | 018" | ½ | 12" |

Packed 6 Strips of a Size in Envelope.

### No. 000D—Ignition Gauge Set

This set consists of 10 blades, 3/16" wide by 1½" long, in Holder. Thicknesses as follows: .011", .012", 014", .018", .020", .022", .025", .028", .032", and .035". Complete in Holder. (Blades not sold separately)

## Feeler Gauge Sets

**No. 000H**—Plastic container with 003, 004, 005, 006, 008, 010, 012, 015 and 018 short feeler gauges.

**No. 000F**—Short plastic container only.

**No. 000J**—Plastic container with 0015L, 002L, 003L, 004L, 005L, 006L, 008L, 010L, 012L, 013L, 015L and 018L long feeler gauges.

**No. 000G**—Long plastic container only.

## No. 2135—Adjustable Bending Bar




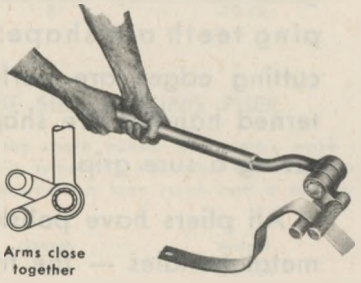


An efficient bending tool with a multitude of applications. Ideal for compressing springs, straightening frames, and for bending bumper brackets, frame horns, conduit, pipe and even heavy plate. Adjustable to more than 100 positions. Length, 36″.

## HACKSAWS

## No. 344—Low-Clearance Hacksaw

For places where a high-frame hacksaw won't work. Takes 10″ blades.

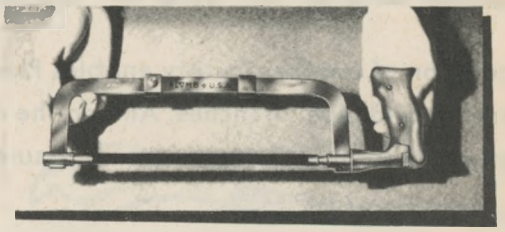

## No. 351—Adjustable Hacksaw

A well-built saw with many fine features. Swivel locks blade at any angle. Inverted handle is molded to fit hand. Blade slides up legs for use in close places. Takes 8″, 10″ or 12″ blades.

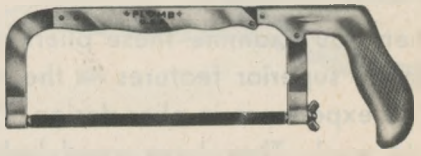

## No. 360—Adjustable Hacksaw

Inexpensive, but sturdy and serviceable. Has pistol grip handle.

# Bars

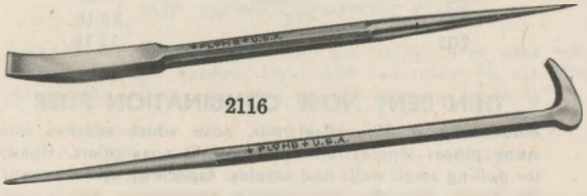


2126

## Conventional Type Garage Bars

| No. | Octagon Stock | Length | Weight |
|---|---|---|---|
| 2116 | ½″ | 16″ | ¾ lb. |
| 2120 | ⅝″ | 18″ | 1½ lbs. |
| 2124 | ¾″ | 24″ | 2¾ lbs. |

## Rolling Head Bars

New type Gear Bar, with 90° rolling head, is especially valuable for getting into close places behind gears, etc.

| No. | Octagon Stock | Length | Weight |
|---|---|---|---|
| 2126 | ½″ | 16″ | ¾ lbs. |
| 2130 | ⅝″ | 18″ | 1½ lbs. |

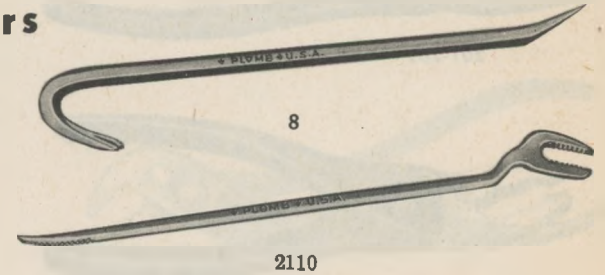


2110

## No. 8—Ripping or Wrecking Bars

| No. | Stock | Length | Wt. lbs. |
|---|---|---|---|
| ~~*8~~ | ~~⅝″~~ | ~~18″~~ | ~~1¾~~ |
| 8 | ⅝″ | 21″ | 2 |
| ~~*8~~ | ~~¾″~~ | ~~24″~~ | ~~2½~~ |
| 8 | ¾″ | 30″ | 4¼ |
| ~~*8~~ | ~~⅞″~~ | ~~30″~~ | ~~5¾~~ |

*Temporarily discontinued

## No. 2110—Grease Bar

Wrench like opening offset to clear obstructions and with coarse teeth to prevent slipping. 28″ long. Weight 3¾ lbs.

# PLOMB TOOL COMPANY

*Streamlined Tools*

## Announcing Plomb's Expanded Line of

# PLIERS and ADJUSTABLE WRENCHES

# ...and a New Line of PIPE WRENCHES

Acquisition of another factory enables Plomb to offer a comprehensive line of pliers, adjustable wrenches and pipe wrenches. Among the many styles and sizes now available, you can find the right ones for any job. And you are assured of high quality.

## PLIERS

Skilled workmen, with the aid of fine equipment, forge and machine these pliers to high standards. Long life is insured by their sturdy construction and by the use of fine high-grade steels.

When you examine these pliers you will find many superior features — the result of years of experience in plier design. They are easy to work. They have good balance — good feel. They have correct leverage. Gripping teeth are shaped properly. Honed cutting edges are perfectly matched. Patterned handles are shaped to fit the hand, giving a sure grip.

All pliers have polished heads and gunmetal handles — the finish found on high-grade pliers for professional use.

201-202

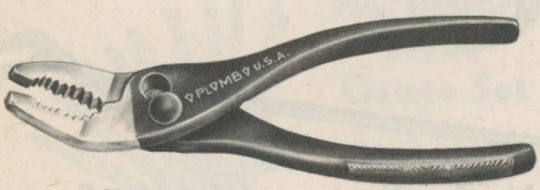


203

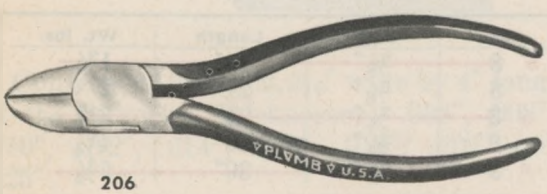


206




209

### THIN NOSE COMBINATION PLIER

Designed with a slim nose to reach into tight places. Has two jaw-opening adjustments and a shear-type wire cutter. A handy plier for all automobile owners and mechanics. Made in two popular sizes.

| Item No. | Length | Weight |
|---|---|---|
| 201 | 5" | .25 Lb. |
| 202 | 6" | .35 Lb. |

### THIN BENT NOSE COMBINATION PLIER

Made with a 30° offset thin nose which reaches into many places inaccessible with straight nose pliers. Handy for pulling small nails and staples. Especially useful around the home. Has two jaw-opening adjustments and a wire cutter of the shear type.

| Item No. | Length | Weight |
|---|---|---|
| 203 | 7" | .43 Lb. |

### BOX JOINT DIAGONAL CUTTING PLIER

Thin, narrow jaws work easily in congested places. Honed cutting edges are perfectly matched, and withstand hard usage. A useful plier for switchboard, telephone, ignition and other electrical work.

| Item No. | Length | Weight |
|---|---|---|
| 206 | 6" | .37 Lb. |

### HEAVY-DUTY DIAGONAL CUTTING PLIER

A powerful cutting plier, designed with the box joint close to the short jaws to provide great leverage. Cuts heavy wire with little effort. Honed cutting edges are perfectly matched. Every mechanic needs this plier.

| Item No. | Length | Weight |
|---|---|---|
| 209 | 7" | .49 Lb. |

## BRAKE SPRING PLIER

Curved jaw clears edge of brake shoe to bring it in close adjustment with center line of spring. Thin hooked jaw slips easily under spring. A popular plier and a necessity for auto mechanics.

| Item No. | Length | Weight |
|---|---|---|
| 215 | 12" | .71 Lb |

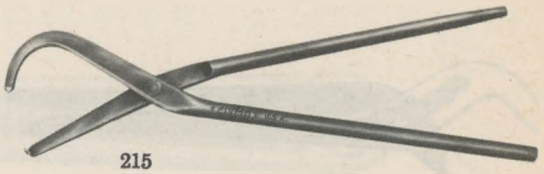
215

## ANGLE NOSE BATTERY PLIER

Thin jaws at 30° angle make terminal nuts easily accessible. No matter what condition the nuts or bolts are in, the gripping jaws take a sure hold.

| Item No. | Length | Weight |
|---|---|---|
| 218 | 8" | .49 Lb. |

218

## NEEDLE NOSE SIDE CUTTING PLIER

The long thin nose and the sharp honed side cutters make an ideal combination for radio, telephone and other electrical work. A good plier for any job where a long reach and a sure grip are required.

| Item No. | Length | Weight |
|---|---|---|
| 226 | 6" | .28 Lb. |

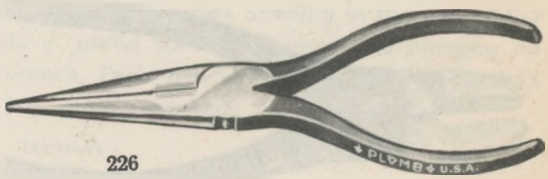

226

## DUCK BILL PLIER

A useful plier for carburetor, radio, refrigerator, electrical type writer, office machine and many other types of work. Long handles provide powerful leverage.

| Item No. | Length | Weight |
|---|---|---|
| 227 | 8" | .44 Lb. |


227

## SLIP JOINT IGNITION PLIER

Designed for ignition work but has many other uses where narrow jaws are needed. Light and convenient to use. Three jaw-opening adjustments allow parallel openings up to 3/8".

| Item No. | Length | Weight |
|---|---|---|
| 235 | 4 1/2" | .07 Lb. |
| 235B (Rivet and washer only) | | |

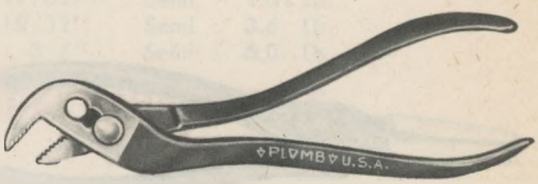

235

## PARROT NOSE COMBINATION WRENCH PLIER

A combination plier and pipe wrench with a 75° offset nose and four jaw-opening adjustments, adapting it to a multitude of uses. Especially popular with plumbers and general mechanics on small pipe and tubing work. Has great gripping power. Made in two sizes.

| Item No. | Length | Weight |
|---|---|---|
| 236 | 6" | .41 Lb. |
| 238 | 7" | .61 Lb. |

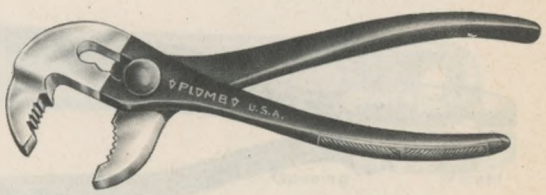

236 and 238

## HEAVY-DUTY WATER PUMP PLIER

An all-purpose plier, with six jaw-opening adjustments. Can be applied to almost any job requiring a plier or pipe wrench. Has a large radius in the movable jaw to secure a better grip in all positions. For heavy-duty work.

| Item No. | Length | Weight |
|---|---|---|
| 240 | 9 1/2" | .62 Lb. |
| 240B (Bolt and nut only) | | |

240

# PLUMB TOOL COMPANY

## Streamlined Tools

## PLIERS




241

### LIGHT-DUTY WATER PUMP PLIER

Similar to the No. 240 plier but lighter and with five jaw-opening adjustments. Teeth are shaped as in a pipe wrench, insuring positive grip on round objects. Only 9/32" thick, but very strong.

| Item No. | Length | Weight |
|---|---|---|
| 241 | 9½" | .58 Lb. |

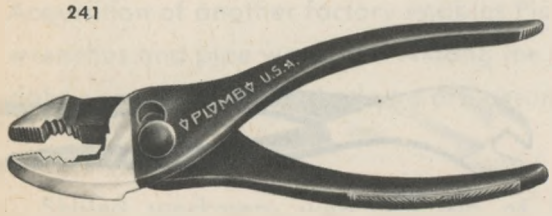


246

### COMBINATION SLIP JOINT SIDE CUTTING PLIER

A well-made plier that cuts most wire and nails with ease. Has two jaw-opening adjustments.

| Item No. | Length | Weight |
|---|---|---|
| 246 | 6" | .49 Lb. |

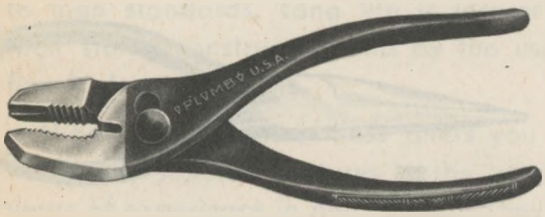


257

### HEAVY-DUTY UNIVERSAL PLIER

A husky plier, popular because of its outstanding design. One jaw is curved, giving a firm grip on objects of almost any shape. Other jaw is grooved for gripping wire or any round surface. Has a shear-type wire cutter and two jaw-opening adjustments. For professional or home use.

| Item No. | Length | Weight |
|---|---|---|
| 257 | 7" | .58 Lb. |




258

### GAS PLIER

Exceptionally popular with refrigeration and diesel mechanics, and all others working with studs, tubing and small pipe. Two ranges of tube sizes are handled by the arrangement of teeth. Even the jaw ends have lengthwise teeth for gripping tubes.

| Item No. | Length | Weight |
|---|---|---|
| 258 | 8" | .75 Lb. |

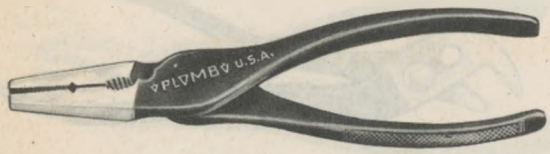


260

### LONG THIN NOSE TELEPHONE PLIER

Popular for telephone work and for radio installation and repair. The long thin nose gets into tight places. Has a powerful shear-type wire cutter.

| Item No. | Length | Weight |
|---|---|---|
| 260 | 6" | .25 Lb. |

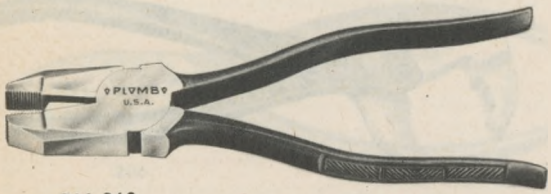


266-268

### LINEMAN'S HEAVY-DUTY SIDE CUTTING PLIER

Designed for utility linemen's work but used also for wiring, and for installation and maintenance of electrical equipment. Useful, too, around filling stations and garages. The sharp edges withstand hard usage. A tough, smooth-working plier, in two sizes.

| Item No. | Length | Weight |
|---|---|---|
| 266 | 6" | .43 Lb. |
| 268 | 8" | .81 Lb. |

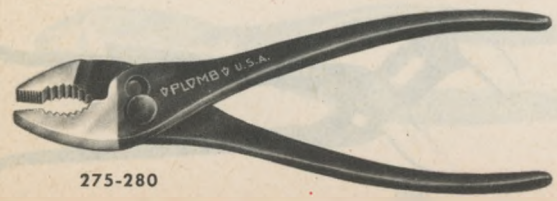


275-280

### COMBINATION SLIP JOINT PLIER

A well-designed, high-quality plier at a low price. A leader for general utility, design and service. Has two jaw-opening adjustments and a shear-type wire cutter. Made in four sizes.

| Item No. | Length | Weight |
|---|---|---|
| 275 | 5" | .26 Lb. |
| 276 | 6" | .41 Lb. |
| 278 | 8" | .58 Lb. |
| 280 | 10" | 1.00 Lb. |

# PLOMB TOOL COMPANY

*Streamlined Tools*



## ADJUSTABLE 22½° ANGLE WRENCHES

Five sizes with full polish and seven sizes with semi polish are offered. A cost saver for users is the 16" wrench which performs every job required of usual 15" and 18" wrenches. While its capacity is equal to that of an 18" wrench, it is nearly as light as a 15" wrench. Another cost saver is the 20" wrench which will do the work of conventional 18" and 24" wrenches.

All Plomb adjustable wrenches are forged from alloy steel. Although strong to do the job, they are thin and light to permit faster work.

An outstanding design feature is the absence of a lip on the inner side of the lower jaw, allowing a square nut to fit flat against the inside of the jaw. This larger available surface for holding a nut results in greater strength, better adaptability to different size nuts, and elimination of "knuckle busting" due to slippage. Another plus value is a 12-point, accurately broached box opening in the end of the handle — useful for turning nuts and hanging up the wrench. Each size wrench has a different box opening, plainly marked.

| Item No. | Length | Maximum Opening | Thickness of Head at Thickest Point | Thickness at Tip of Jaw | Polish | Weight |
|---|---|---|---|---|---|---|
| 704 | 4" | 1/2" | 5/16" | 9/64" | Full | .08 Lb. |
| 704S | 4" | 1/2" | 5/16" | 9/64" | Semi | .08 Lb. |
| 706 | 6" | 3/4" | 13/32" | 7/32" | Full | .25 Lb. |
| 706S | 6" | 3/4" | 13/32" | 7/32" | Semi | .25 Lb. |
| 708 | 8" | 15/16" | 15/32" | 1/4" | Full | .53 Lb. |
| 708S | 8" | 15/16" | 15/32" | 1/4" | Semi | .53 Lb. |
| 710 | 10" | 1 1/8" | 9/16" | 3/8" | Full | .91 Lb. |
| 710S | 10" | 1 1/8" | 9/16" | 3/8" | Semi | .91 Lb. |
| 712 | 12" | 1 5/16" | 3/4" | 17/32" | Full | 1.61 Lb. |
| 712S | 12" | 1 5/16" | 3/4" | 17/32" | Semi | 1.61 Lb. |
| 716S | 16" | 1 7/8" | 15/16" | 19/32" | Semi | 3.6 Lb. |
| 720S | 20" | 2 1/2" | 1 5/32" | 3/4" | Semi | 6.0 Lb. |

## STILLSON-PATTERN PIPE WRENCHES

These all-steel handle pipe wrenches are the finest made. Extra strong, they stand up under the hardest use. The present design is the result of constant mechanical improvement. Deep milled teeth insure a positive grip on pipe. The easy turning nut permits fast adjustment. Made in six sizes.

| Item No. | Length | Maximum Opening | Weight |
|---|---|---|---|
| 806 | 6" | 1/2" | .31 Lb. |
| 808 | 8" | 3/4" | .69 Lb. |
| 810 | 10" | 1" | 1.50 Lb. |
| 814 | 14" | 1-1/2" | 2.8 Lb. |
| 818 | 18" | 2" | 4.0 Lb. |
| 824 | 24" | 2-1/2" | 7.2 Lb. |

# PLUMB TOOL COMPANY

*Streamlined Tools*

## WORLD'S FINEST SCREW DRIVERS

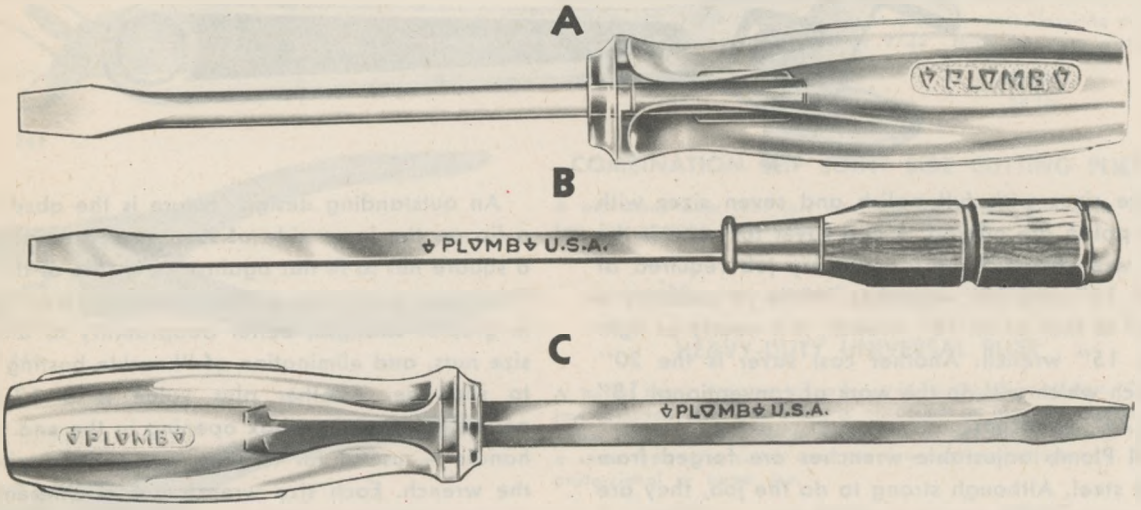


**A** If you're looking for a screw driver with the latest indestructible, transparent plastic handle, stop right now. Here is one with a round blade for easy spinning. The Handle is 4 fluted design. Just try your grip on this and feel the difference.

**B** You want a screw driver that can take it and here it is. Blades forged from finest Alloy Steel. The wood handles octagon shape for firm gripping. Blades fully heat-treated and cap anchored to blade which passes through Handle.

**C** A companion to the Round Blade at a price that will astound you. It has the 4 fluted Handle which is a non-conductor of electricity. The full heat-treated blade will give you perfect satisfaction under the hardest of use.

### A PLASTIC HANDLE - - - ROUND BLADE

| No. | Length Blade | Overall Length | Diam. Shank | Width Bit |
|---|---|---|---|---|
| 9604 | 4″ | 8″ | 1/4″ | 9/32″ |
| 9606 | 6″ | 10½″ | 5/16″ | 11/32″ |
| 9608 | 8″ | 13″ | 3/8″ | 13/32″ |
| 9622 | 2½″ | 5¼″ | 1/8″ | 1/8″ |
| 9624 | 4½″ | 7¼″ | 1/8″ | 1/8″ |
| 9632 | 4″ | 7½″ | 3/16″ | 3/16″ |
| 9633 | 7½″ | 11″ | 3/16″ | 3/16″ |
| 9638 | 13½″ | 17″ | 3/16″ | 3/16″ |
| 9642 | 9″ | 13″ | 1/4″ | 9/32″ |
| 9643 | 10″ | 14½″ | 5/16″ | 11/32″ |
| *9651 | 1″ | 2⅞″ | 3/16″ Sq. | 9/32″ |
| *9652 | 1½″ | 3⅞″ | 1/4″ Sq. | 9/32″ |

* Illustrated on following page.

*Buy Tools in Sets as Listed in This Catalogue*

## B WOOD HANDLE - - - SCREW DRIVER

| No. | Overall Length | Blade Length | Shank Size | Bit Width |
|---|---|---|---|---|
| General Purpose Type—Blade Through Handle | | | | |
| 9701 | 4¼" | 1½" | 3/16" | 1/32" |
| 9702 | 6⅝" | 2½" | 3/16" | 7/32" |
| 9704 | 9" | 4" | ¼" | 9/32" |
| 9706 | 12⅛" | 6" | 5/16" | 11/32" |
| 9708 | 14⅜" | 8" | ⅜" | 13/32" |
| 9710 | 16¾" | 10" | ⅜" | 13/32" |
| 9712 | 18¾" | 12" | ⅜" | 13/32" |
| 9714 | 22¾" | 14" | 7/16" | 9/16" |

| No. | Overall Length | Blade Length | Shank Size | Bit Width |
|---|---|---|---|---|
| Electrical Type—No Metal Cap | | | | |
| 9722 | 5¼" | 2½" | ⅛" | ⅛" |
| 9724 | 7¼" | 4½" | ⅛" | ⅛" |
| 9732 | 8 7/16" | 4" | 3/16" | 7/32" |
| 9733 | 12 ⅜" | 7½" | 3/16" | 7/32" |
| Cabinet Type—Long Slim Blade Through Handle | | | | |
| 9741 | 13⅛" | 9" | 3/16" | 7/32" |
| 9742 | 14½" | 9½" | ¼" | 9/32" |
| 9743 | 16⅛" | 10" | 5/16" | 11/32" |

## C PLASTIC HANDLE - - - SQUARE BLADE

| Cat. No. | Length Blade | Overall Length | Shank Size | Bit Width |
|---|---|---|---|---|
| 9804 | 4" | 8" | 1/4" sq. | 9/32" |
| 9806 | 6" | 10½" | 5/16" " | 11/32" |
| 9808 | 8" | 13" | 3/8" " | 13/32" |
| 9822 | 2½" | 5¼" | 1/8" " | 1/8" |
| 9832 | 4" | 7½" | 3/16" " | 7/32" |
| 9833 | 7½" | 11" | 3/16" " | 7/32" |
| 9842 | 9" | 13" | 1/4" " | 9/32" |
| 9843 | 10" | 14½" | 5/16" " | 11/32" |

Screwdriver sets, see following page

## Short Screw Drivers

### No. 9651

Blade 1" long, 9/32" bit; 2⅞" overall length. Moulded plastic handle.

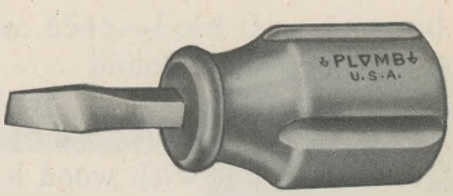


### No. 9652

1½" blade, 9/32" bit, 3⅞" overall length. Moulded plastic handle.

### No. 100—Key Ring Screw Driver

Hand-forged, individually heat-treated. 2¼" long.




### No. 9752 Wood Handle

Blade 1¾" long, with handle 4¼" long, 1-3/16" octagon. 5/16" square shank, with 11/32" bit.

# PLOMB TOOL COMPANY

*Streamlined Tools*

## 4 Screw Drivers
### Handle All Phillips Screws

The four sizes of Plomb Phillips screw drivers listed below drive the entire range of screw and bolt sizes. With slotted screws, at least seven or eight drivers are required. Come either with Moulded Plastic or Wood Handles.

| Plastic Handle Cat No. | Phillips No. | Diam. Stock | Blade Length | Overall Length | Wood Handle Overall Length | Wood Handle Cat. No. |
|---|---|---|---|---|---|---|
| 9682 | 1-A | 3/16" | 3" | 6½" | 6¼" | 9782 |
| 9684 | 2-A | ¼" | 4" | 8" | 8⅛" | 9784 |
| 9686 | 3-A | 5/16" | 6" | 10½" | 12" | 9786 |
| 9688 | 4-A | ⅜" | 8" | 13" | 14½" | 9788 |

## Offset Screw Drivers

For drag link adjustments, brake work, and work in close places. Bits at right angles to each other.

| | | |
|---|---|---|
| **No. 35¼** | ¼" Oct. Stock | 3" long |
| **No. 36¼** | ¼" Oct. Stock | 4¾" long |
| **No. 36 5/16** | 5/16" Oct. Stock | 5" long |
| **No. 36⅜** | ⅜" Oct. Stock | 6⅛" long |
| **No. 36½** | ½" Oct. Stock | 7" long |




### Detachable Phillips Bits with 3-8" Drive

**5241**—For No. 2 Phillips screws
**5242**—For No. 3 " "
**5243**—For No. 4 " "

## Stub Phillips Screw Drivers

No. 9671—Moulded—Plastic Handle, overall length 2 7/16", with No. 2 Phillips Point.

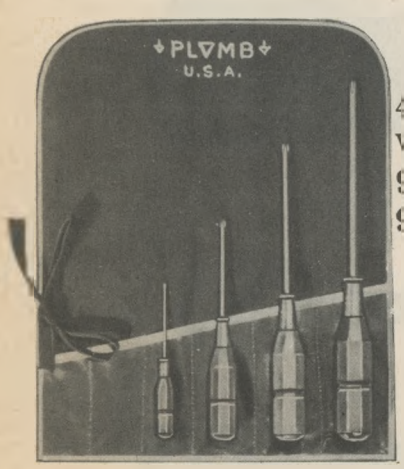


**Set No. 9780-A**

4 sizes of Phillips Screwdrivers with wood handles. Wt. 1½ lbs.

| | | |
|---|---|---|
| 9782 | 9786 | 2405 |
| 9784 | 9788 | Kit |

**Set No. 9700-A**

Set of 7 popular screwdrivers including stubby, long thin blade and heavy duty types--wood handles and metal caps. Wt. 3½ lbs.

| | | | |
|---|---|---|---|
| 9701 | 9704 | 9708 | 9741 |
| 9702 | 9706 | 9710 | 2406 (Kit) |

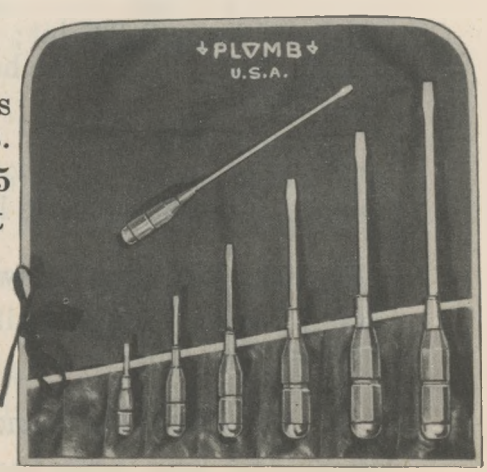


**Sets cannot be shipped complete from factory but can be assembled by distributor.**

# SPECIAL-PURPOSE TOOLS

## No. 2006—Brake Adjusting Tool




Star nut adjusting wrench for two-shoe Bendix brakes. Length, 8½".

## No. 2301—Muffler Removal Tool

A practical tool for removing mufflers and tailpipes. Easy and safe to use. Makes quick work of taking off old mufflers that are corroded, burned and hard to get at. Forged from electric-furnace chisel steel.

## No. 4041—Battery Terminal Puller

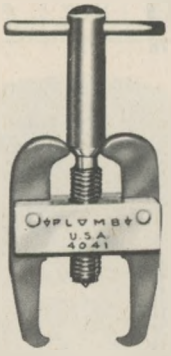


Works on any battery, any terminal, anywhere. It removes a terminal quickly and easily, even if badly corroded. A turn of the handle clamps the jaws and lifts the terminal. Jaws close only enough to grip firmly and do not dig into the post. This puller can be used for several other jobs.

## No. 4050—Pinion Puller



Designed for pulling GM pinions, but can be used for many other pulling jobs. Three sizes of fulcrum plugs are provided, thus eliminating any leverage problems. A solid tool, easy and safe to use.

## No. 4080—Blind Bearing Puller

For pulling Chevrolet, Ford and Packard pilot bearings, but has many other uses. A simple, efficient puller with only two parts. Has an exceptional range of expansion. Can be used alone or with a Plomb Slide Hammer Puller No. 4056.

## No. 5405—Spring Tester

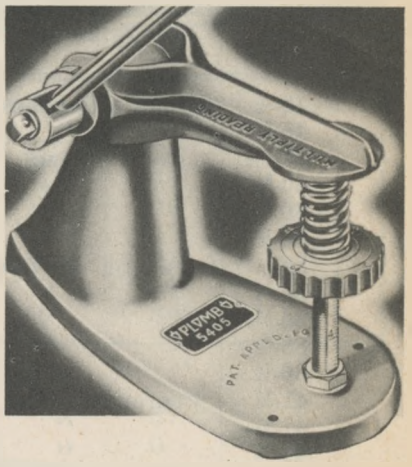


This tester with a torque wrench measures the recoil pressures of valve and clutch springs compressed to any predetermined length. It provides a fast, accurate means for inspecting coil springs up to 7" in length and 2½" in diameter. It also provides a rapid method for matching sets of springs—to increase the power and over-all efficiency of engines. The 5405 is compactly designed, competently engineered and accurately constructed. It is built for lifetime service with no fragile mechanisms, and it is guaranteed permanently accurate.

## No. 6509—V8 Valve Guide Punch




Knocks out the split valve guides easily and quickly.

## No. 6545—Ford Drag Link and Shock Arm Tool




Tapered fork of slim design is readily inserted to separate the shock links and tie rods. A real time saver. Has knurled handle. Length, 16".

## No. 6601 Starter Wrench

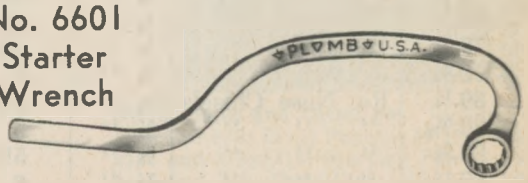


For Plymouth, Dodge, Chrysler and De Soto cars. Clears obstructions when removing or replacing starter. Has ⅝" opening.

# Punches, Chisels and Offset Screw Drivers

| Tool Number | DESCRIPTION | Stock In Inches | Length In Inches | Cut | Point or Bit |
|---|---|---|---|---|---|
| 15-½ | Aligning Punches | ½ Ro. | 11 | | ⅛" |
| 15-⅝ | " " | ⅝ Oct. | 16 | | 3/16" |
| 30-7/16 | Rivet Cutters | 7/16 " | 15 | ½" | |
| 30-⅝ | " " | ⅝ " | 8 | ¾" | |
| 30-¾ | " " | ¾ " | 12 | ⅞" | |
| 30-⅞ | " " | ⅞ " | 12 | 1" | |
| 35-¼ | Offset Sc. Drivers | ¼ " | 3 | | ¼" |
| 36-¼ | " " " | ¼ " | 4¾ | | ¼" |
| 36-5/16 | " " " | 5/16 " | 5 | | 5/16" |
| 36-⅜ | " " " | ⅜ " | 6⅛ | | ⅜" |
| 36-½ | " " " | ½ " | 7 | | ½" |
| 41-¼ | Center Punches | ¼ " | 4¼ | | |
| 41-5/16 | " " | 5/16 " | 4⅝ | | |
| 41-⅜ | " " | ⅜ " | 4⅞ | | |
| 41-7/16 | " " | 7/16 " | 5¼ | | |
| 41-½ | " " | ½ " | 5⅝ | | |
| 41-⅝ | " " | ⅝ " | 6 | | |
| 44-¼ | Prick Punches | ¼ " | 4¾ | | |
| 44-5/16 | " " | 5/16 " | 5 | | |
| 44-⅜ | " " | ⅜ " | 5¼ | | |
| 47-¼x1/16 | Riv't or Pin Pnch. | ¼ " | 4⅜ | | 1/16" |
| 47-¼x3/32 | " " " " | ¼ " | 4¾ | | 3/32" |
| 47-5/16x⅛ | Riv't or Pin Pnch. | 5/16 " | 5¼ | | ⅛" |
| 47-5/16x5/32 | " " " " | 5/16 " | 5⅝ | | 5/32" |
| 47-⅜ | " " " " | ⅜ " | 6⅛ | | 3/16" |
| 47-7/16 | " " " " | 7/16 " | 6⅝ | | 7/32" |
| 47-½x3/16 | " " " " | ½ " | 6⅝ | | 3/16" |
| 47-½x¼ | " " " " | ½ " | 7 | | ¼" |
| 47-⅝ | " " " " | ⅝ " | 7½ | | 5/16" |
| 50-3/16 | Starting Punches | 3/16 " | 4¼ | | 1/16" |
| 50-¼ | " " | ¼ " | 4⅝ | | 3/32" |
| 50-5/16 | " " | 5/16 " | 5⅛ | | ⅛" |
| 50-⅜ | " " | ⅜ " | 5⅝ | | 3/16" |
| 50-7/16 | " " | 7/16 " | 6 | | 7/32" |
| 50-½ | " " | ½ " | 6½ | | ¼" |
| 50-⅝ | " " | ⅝ " | 7 | | 5/16" |
| 50-¾ | " " | ¾ " | 7½ | | ⅜" |
| 72-¼ | Cape Chisels | ¼ " | 4½ | 5/32" | |
| 72-5/16 | " " | 5/16 " | 5 | 3/16" | |
| 72-⅜ | " " | ⅜ " | 5½ | ¼" | |
| 72-½ | " " | ½ " | 6 | 5/16" | |
| 72-⅝ | " " | ⅝ " | 6½ | ⅜" | |
| 72-¾ | " " | ¾ " | 7 | ½" | |
| 76-¼ | Diamond Chisels | ¼ " | 4½ | 5/32" | |
| 76-5/16 | " " | 5/16 " | 5 | 3/16" | |
| 76-⅜ | " " | ⅜ " | 5½ | ¼" | |
| 76-½ | " " | ½ " | 6 | 5/16" | |
| 76-⅝ | " " | ⅝ " | 6½ | ⅜" | |
| 76-¾ | " " | ¾ " | 7 | ½" | |
| 80-¼ | Ro. Nose Chisels | ¼ " | 4½ | 5/32" | |
| 80-5/16 | " " " | 5/16 " | 5 | 3/16" | |
| 80-⅜ | " " " | ⅜ " | 5½ | ¼" | |
| 80-½ | " " " | ½ " | 6 | 5/16" | |
| 80-⅝ | " " " | ⅝ " | 6½ | ⅜" | |
| 80-¾ | " " " | ¾ " | 7 | ½" | |

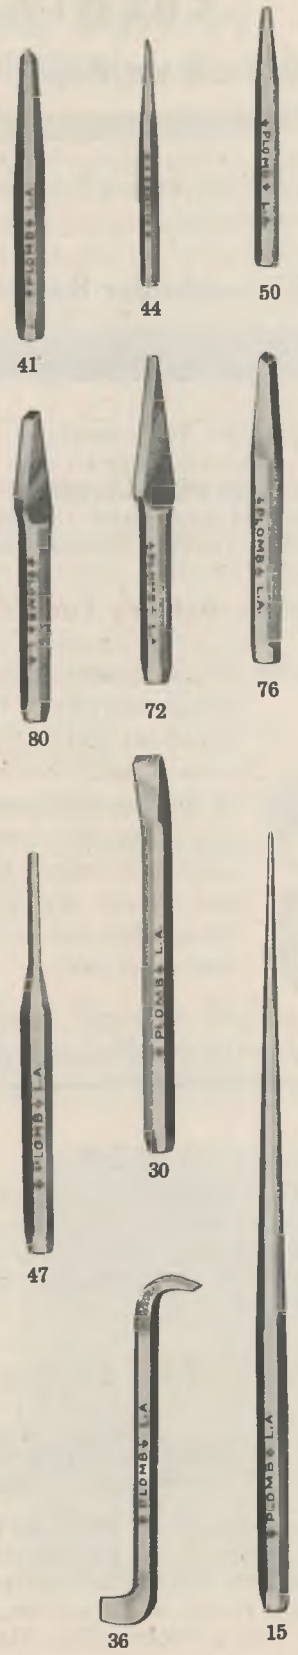

## Special Cold Chisels

| Cat. No. | Stock | Cut | Length |
|---|---|---|---|
| 86A3/16 | 3/16" | 1/4" | 4 1/4" |
| 86A1/4 | 1/4" | 5/16" | 4 1/2" |
| 86A5/16 | 5/16" | 3/8" | 5" |
| 86A3/8 | 3/8" | 7/16" | 5 1/2" |
| 86A7/16 | 7/16" | 1/2" | 6" |
| 86A1/2 | 1/2" | 5/8" | 6 1/2" |
| 86A5/8x7" | 5/8" | 3/4" | 7" |
| 86A3/4x7 1/2" | 3/4" | 7/8" | 7 1/2" |
| 86A3/4x12" | 3/4" | 7/8" | 12" |
| 86A7/8x8" | 7/8" | 1" | 8" |
| 86A7/8x12" | 7/8" | 1" | 12" |
| 86A 1"x8" | 1" | 1 3/16" | 8" |
| 86A 1"x12" | 1" | 1 3/16" | 12" |

## Long Taper Drift Punches

| Cat. No. | Stock | Length | Point |
|---|---|---|---|
| 96-1/4 | 1/4" | 10" | 3/32" |
| 96-5/16 | 5/16" | 10" | 1/8" |
| 96-3/8 | 3/8" | 10" | 3/16" |
| 96-7/16 | 7/16" | 10" | 7/32" |
| 96-1/2 | 1/2" | 10" | 1/4" |
| 96-5/8 | 5/8" | 10" | 5/16" |
| 96-3/4 | 3/4" | 10" | 3/8" |

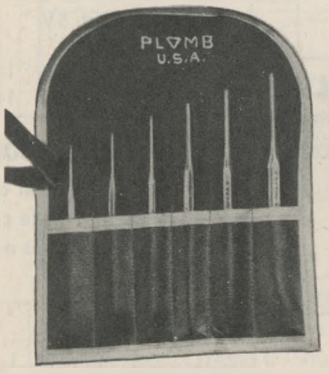


**No. 47A Rivet or Pin Punch Set.** Includes Punches 47-1/4 x1/16, 1/4x3/32, 5/16x1/8, 5/16x5/32, 3/8x3/16, 7/16x 7/32 and 1/2x1/4 in Leatherette Kit No. 2403.

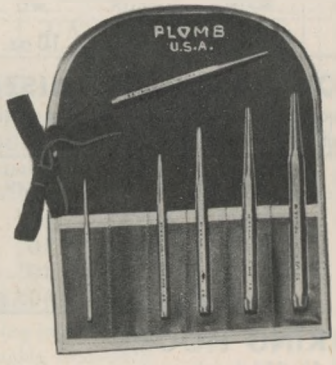


**No. 50A Starting Punch Set.** Includes Punches 50-3/16, 1/4, 5/16, 3/8, 7/16 and 1/2 in Leatherette Kit No. 2403.

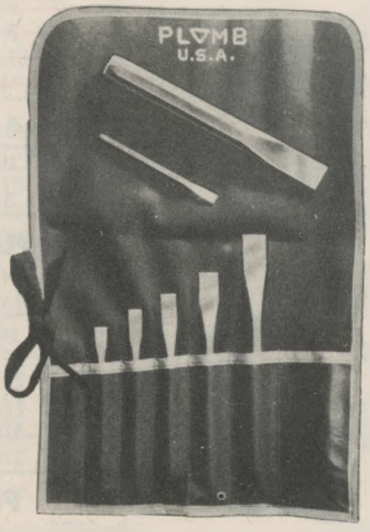


**No. 86AA Cold Chisel Set.** Includes Chisels 86A-1/4, 5/16, 3/8, 7/16, 1/2, 5/8 and 3/4x7-1/2 in Leatherette Kit No. 2404.

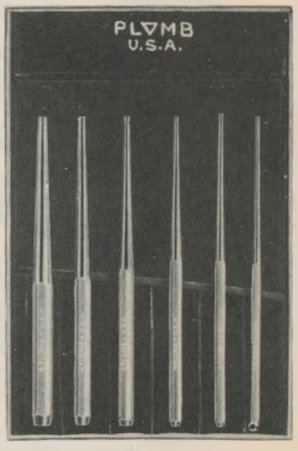


**No. 96A Drift Punch Set.** Includes Punches 96-1/4, 5/16, 3/8, 7/16, 1/2 and 5/8 in Leatherette Kit No. 2404.

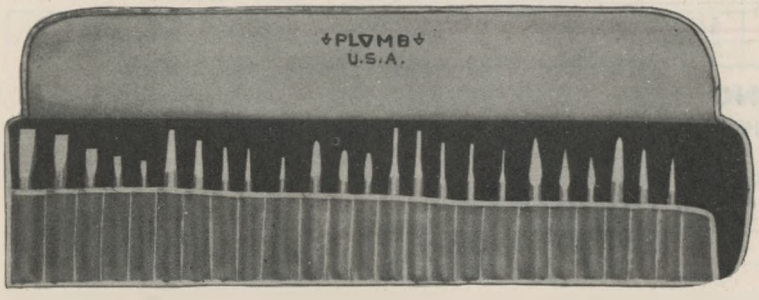


**No. 1 Punch and Chisel Set.** Includes Center Punches 41-5/16 and 7/16; Prick Punch 44-1/4; Rivet Punches 47-1/4x3/32, 5/16x1/8, 5/16x5/32, 3/8x3/16 and 7/16x7/32; Starting Punches 50-3/16, 1/4, 5/16, 3/8 and 7/16; Cape Chisels 72-1/4, 5/16 and 3/8; Diamond Point Chisels 76-1/4, 5/16 and 3/8, and Cold Chisels 86A-1/4, 5/16, 3/8, 7/16 and 1/2 in Leatherette Kit No. 2401.

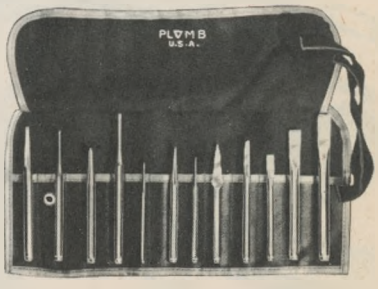


**No. 2 Punch and Chisel Set.** Includes Center Punch 41-3/8; Rivet Punches 47-1/4x3/32, 5/16 x1/8 and 3/8x3/16; Starting Punches 50-3/16, 5/16 and 3/8; Cape Chisel 72-5/16; Diamond Point Chisel 76-5/16, and Cold Chisels 86A-1/4, 3/8 and 7/16 in Leatherette Kit No. 2402.

**Sets cannot be shipped complete from factory but can be assembled by distributor.**

# PLUMB TOOL COMPANY

*Streamlined Tools*

# PLUMBING TOOLS

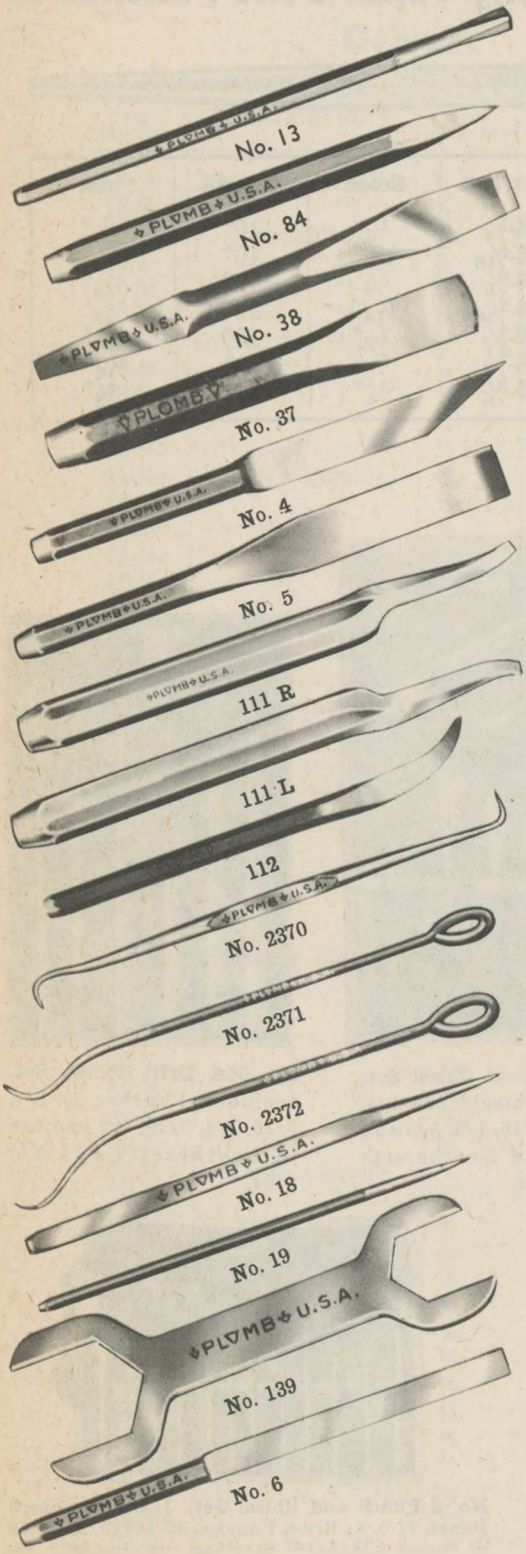


## NO. 13— STAR DRILLS

Forged star drills are made from fatigue- and shock-resisting alloy steel. Wings have proper filet and taper for maximum strength, long enough to permit sharpening. They center easily.

| NO. | STOCK | CUT | 12" LONG |
|---|---|---|---|
| 13 | 1/4" | 1/4" | X |
| 13 | 1/4" | 5/16" | X |
| 13 | 5/16" | 3/8" | X |
| 13 | 3/8" | 7/16" | X |
| 13 | 3/8" | 1/2" | X |
| 13 | 7/16" | 5/8" | X |
| 13 | 1/2" | 3/4" | X |
| 13 | 5/8" | 7/8" | X |
| 13 | 3/4" | 1" | X |
| 13 | 7/8" | 1-1/8" | X |
| 13 | 7/8" | 1-1/4" | X |
| 13 | 7/8" | 1-1/2" | X |

## NO. 84—CONCRETE GADS

Will not wedge in. Heat-treated to withstand an enormous amount of pounding through concrete.

| NO. | STOCK | CUT | LENGTH |
|---|---|---|---|
| 84 | 3/4" | ..... | 12" |
| 84 | 7/8" | ..... | 12" |
| 84 | 1" | ..... | 12" |
| 84 | 1-1/4" | ..... | 12" |

## NO. 38—SCREW DRIVER BITS

Square taper hand-forged to fit standard bit brace chuck.

| NO. | STOCK | CUT | LENGTH |
|---|---|---|---|
| * ~~38~~ | ~~9/32"~~ | ~~1/4" Bit~~ | ~~4-1/2"~~ |
| * ~~38~~ | ~~5/16"~~ | ~~5/16" Bit~~ | ~~4-1/2"~~ |
| * ~~38~~ | ~~11/32"~~ | ~~3/8" Bit~~ | ~~4-1/2"~~ |
| * ~~38~~ | ~~3/8"~~ | ~~1/2" Bit~~ | ~~4-1/2"~~ |

## NO. 4—PLUGGING CHISELS

| NO. | STOCK | BLADE | LENGTH | WT. |
|---|---|---|---|---|
| 4 | 5/8" | 1/4" Cut | 10" | 10 oz. |

## NO. 5—FLOOR OR WOOD CHISELS

These all-steel wood chisels stand up under cutting conditions that wreck ordinary carpenters' wood chisels.

| NO. | STOCK | WIDTH OF CUT | BLADE LENGTH | OVERALL LENGTH |
|---|---|---|---|---|
| 5-7/16 | 7/16" | 5/8" | 4-1/4" | 10" |
| 5-1/2 | 1/2" | 3/4" | 4-3/8" | 10" |
| 5-5/8 | 5/8" | 1" | 4" | 10" |
| 5-3/4 | 3/4" | 1-3/16" | 4-1/8" | 10" |

## PACKING HOOKS

No. 2370—Length 8", 90° hook.

* ~~No. 2371—1/4" stock, 10" long, curved.~~

* ~~No. 2372—5/16" stock, 11-1/4" long, curved.~~

## SCRATCH AWLS

| NO. | SIZE | STOCK | LENGTH | WT. DOZ. |
|---|---|---|---|---|
| * ~~18~~ | ~~5/16"~~ | ~~Square~~ | ~~7"~~ | ~~2-1/8 lbs.~~ |
| 19 | 3/16" | Oct. | 7" | 3/4 lbs. |

## NO. 139—SPUD WRENCHES

Forged from spring steel. Not heat-treated, so jaws can be hammered closer together or spread if necessary. Far superior to the cheap, heavy cast wrenches. For use on 1-1/2" or 2" spuds. Wt. 1 lb. each.

* ~~No. 139—2"x2-1/2" openings; 11-1/2" long.~~

## NO. 37—SOIL PIPE CHISELS

In great demand for the difficult job of cutting soil pipe. Rounded edge gives maximum cutting surface at point of contact, regardless of chisel angle. Cuts pipe quicker and easier than a regular cold chisel.

| NO. | STOCK | CUT | LENGTH | WT. |
|---|---|---|---|---|
| 37 | 1/2" | 5/8" Cut | 5 1/2" | 5 oz. |
| 37 | 5/8" | 3/4" Cut | 6" | 8 oz. |
| 37 | 3/4" | 7/8" Cut | 6 1/2" | 12 oz. |
| 37 | 7/8" | 1" Cut | 7" | 16 oz. |

## LEAD-PICKING TOOLS

New and modern in design that gives them a wide preference over similar types now on the market.

| NO. | STOCK | LENGTH | WT. |
|---|---|---|---|
| * ~~111L~~ | ~~3/4"~~ | ~~8-1/2"~~ | ~~14 oz.~~ |
| * ~~111R~~ | ~~3/4"~~ | ~~8-1/2"~~ | ~~14 oz.~~ |
| 112 | 1/2" | 9" | 7 oz. |

## NO. 6—SPRING YARNING IRONS

Blade is spring steel and is slightly offset for clearance.

| NO. | STOCK | WIDTH | LENGTH | WT. |
|---|---|---|---|---|
| 6 | 1/2" | 5/8" | 11-1/2" | 1/2 lb. |
| 6 | 1/2" | 5/8" | 18" | 3/4 lb. |
| 6 | 5/8" | 3/4" | 12" | 1/2 lb. |
| 6 | 5/8" | 3/4" | 18" | 3/4 lb. |
| 6 | 3/4" | 7/8" | 14" | 3/4 lb. |

*TEMPORARILY DISCONTINUED

PREFERRED BY MEN WHO EARN THEIR LIVING WITH TOOLS

# PLUMBING TOOLS

## NO. 14—OFFSET YARNING IRONS

| NO. | STOCK | WIDTH | LENGTH | WT. |
|---|---|---|---|---|
| 14 | 1/2" | 19/32" | 11-1/2" | 3/4 lb. |
| 14 | 5/8" | 11/16" | 9" | 1/2 lb. |
| 14 | 5/8" | 11/16" | 12" | 3/4 lb. |
| 14 | 5/8" | 11/16" | 18" | 5/8 lb. |
| 14 | 3/4" | 3/4" | 14" | 3/4 lb. |

## NO. 135 BENDING IRONS

| NO. | STOCK | WIDTH | LENGTH | WT. |
|---|---|---|---|---|
| * ~~135-1/2~~ | ~~1/2"~~ | ..... | ~~10-5/8"~~ | ~~1/2 lb.~~ |
| * ~~135-5/8~~ | ~~5/8"~~ | ..... | ~~10-5/8"~~ | ~~3/4 lb.~~ |

## NO. 20 ELBOW CALKERS

The 45° angle gets into places inaccessible to Nos. 31 and 33 calkers, described below. Ground straight.

| NO. | STOCK | BLADE | LENGTH | WT. |
|---|---|---|---|---|
| ~~*20-1-2~~ | ~~1/2"~~ | ~~11/16" Wide~~ | ~~4-3/4"~~ | ~~5 oz.~~ |

## NO. 21—PONY CALKERS (PAIR)

| | | | | |
|---|---|---|---|---|
| 21-1/2 | 1/2" | 3/4" Wide | 3" | Curved |

## GASKET CALKERS

| | | | | |
|---|---|---|---|---|
| 31-5/8 | 5/8" | Short | 5-5/8" | 10 oz. |
| 31-3/4 | 3/4" | Short | 7" | 10 oz. |
| 131-5/8 | 5/8" | Long | 9-1/2" | 12 oz. |
| 131-3/4 | 3/4" | Long | 10" | 12 oz. |

## NO. 033—OFFSET CALKERS (PAIR)

| NO. | STOCK | BLADE | LENGTH | WT. |
|---|---|---|---|---|
| 033-1/2 | 1/2" | 3/4" Wide | 5-3/4" | 13 oz. |
| 033-5/8 | 5/8" | 7/8" Wide | 6-1/4" | 13 oz. |
| 033-3/4 | 3/4" | 1" Wide | 7" | 14 oz. |

## NO. 33—LONG CALKERS (PAIR)

Used for calking lead in hub of soil pipe. Ground both inside or outside; concave blades fit 4" pipe.

| | | | | |
|---|---|---|---|---|
| 33-1/2 | 1/2" | 3/4" Wide | 5-1/2" | 12 oz. |
| 33-5/8 | 5/8" | 7/8" Wide | 5-3/4" | 12 oz. |
| 33-3/4 | 3/4" | 1" Wide | 6-3/4" | 13 oz. |

## WATER MAIN CALKERS

Do a good, fast job of calking joints in heavy cast iron water mains. Ground square; handle offset for knuckle clearance.

| | | | | |
|---|---|---|---|---|
| 108-5/8 | 7/8" | 5/8"x1" | 8" | 1 lb. |
| 108-1/2 | 7/8" | 1/2"x1" | 8" | 1 lb. |
| 108-3/8 | 7/8" | 3/8"x1" | 8" | 1 lb. |
| 109-1/4 | 3/4" | 1/4"x1" | 8" | 1 lb. |

## NO. 130—CEILING CALKERS

| | | | | |
|---|---|---|---|---|
| 130 | 5/8" | ..... | 10" | 1 lb. |

## NO. 132—RIGHT AND LEFT CALKERS

Calk joints near walls or in corners where Nos. 31 or 33 calkers cannot be used. Made both right and left, ground either inside or outside. Come in pairs.

| | | | | |
|---|---|---|---|---|
| 132R | 5/8" | ..... | 8-7/8" | 3/4 lb. |
| 132L | 5/8" | ..... | 8-7/8" | 3/4 lb. |

## BROAD CURVED NOSE CALKING IRON

| NO. | STOCK | WIDTH | THICKNESS | LENGTH |
|---|---|---|---|---|
| 110-5/8 | 5/8" | 1-1/2" | 1/8" | 8-1/2" |

## TUBING EXPANDERS

| NO. | LENGTH | STEPS | EXPANDS PIPE TO | WT. |
|---|---|---|---|---|
| 136 | 3-1/8" | 3 | 1-1/4", 1-3/8", 1-1/2" | 14 oz. |

*TEMPORARILY DISCONTINUED

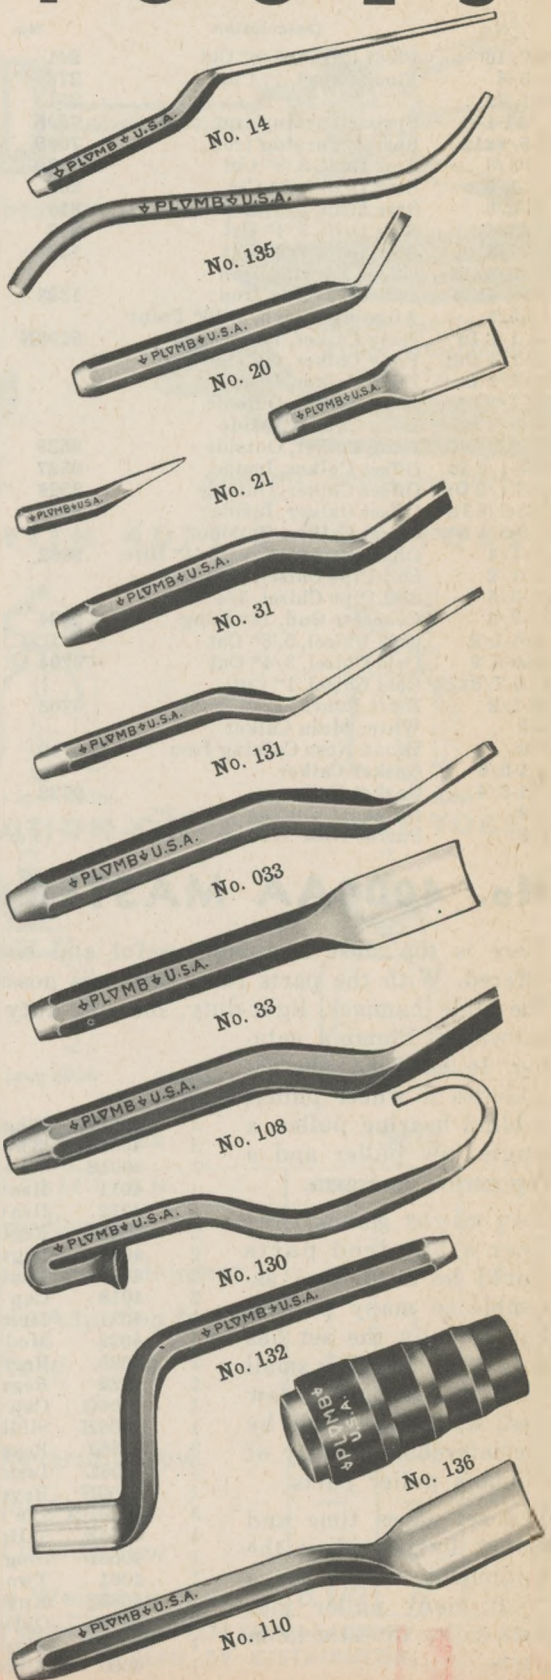

*Streamlined Tools*

# No. 9900PL TOOL SET FOR PLUMBERS

| No. | Description |
|---|---|
| 5-7/16 | Floor Chisel, 5/8" Cut |
| 5-5/8 | Floor Chisel, 1" Cut |
| 6-1/2x 11-1/2 | Spring Yarning Iron |
| 6-5/8x12 | Spring Yarning Iron |
| 13-3/8 | Star Drill, 3/8" Cut |
| 13-1/2 | Star Drill 1/2" Cut |
| 13-5/8 | Star Drill, 5/8" Cut |
| 13-3/4 | Star Drill, 3/4" Cut |
| 13-7/8 | Star Drill, 7/8" Cut |
| 14-5/8x12 | Offset Yarning Iron |
| 14-3/4x14 | Offset Yarning Iron |
| 15-5/8 | Aligning Punch, 3/16" Point |
| 21-1/2 In | Pony Calker, Inside |
| 21-1/2 Out | Pony Calker, Outside |
| 33-1/2 In | Long Calker, Inside |
| 33-1/2 Out | Long Calker, Outside |
| 33-5/8 In | Long Calker, Inside |
| 33-5/8 Out | Long Calker, Outside |
| 033-1/2 In | Offset Calker, Inside |
| 033-1/2 Out | Offset Calker, Outside |
| 033-5/8 In | Offset Calker, Inside |
| 033-5/8 Out | Offset Calker, Outside |
| 35-1/4 | Offset Screwdriver, 1/4" Bits |
| 37-1/2 | Soil Pipe Chisel, 5/8" Cut |
| 37-5/8 | Soil Pipe Chisel, 3/4" Cut |
| 84-7/8 | Concrete Gad, 12" Long |
| 86A-1/2 | Cold Chisel, 5/8" Cut |
| 86A-5/8 | Cold Chisel, 3/4" Cut |
| 86A-7/8x12 | Cold Chisel, 1" Cut |
| 96-1/2 | Drift Punch, 1/4" Point |
| 109 | Water Main Calker |
| 110 | Broad Nose Calking Iron |
| 131-5/8 | Gasket Calker |
| 131-3/4 | Gasket Calker |
| 209 | Diagonal Cutting Plier, 7" |
| 238 | Parrot Nose Wrench Plier, 7" |
| 241 | Water Pump Plier, 9-1/2" |
| 276 | Comb. Slip Joint Plier, 6" |
| 351 | Adjustable Hacksaw |
| 706S | Adjustable Wrench, 6" |
| 708S | Adjustable Wrench, 8" |
| 712S | Adjustable Wrench, 12" |
| 808 | Pipe Wrench, 8" |
| 814 | Pipe Wrench, 14" |
| 818 | Pipe Wrench, 18" |
| 1392 | Plastic-Tip Hammer, 1-1/4 Lb., Hard 2" Diam. Tips |
| 1398 | Plastic-Tip Hammer, 12 Oz., Soft 1-1/2" Diam. Tips |
| 5200N | Socket Set, 3/8" Drive (Sockets 5212, 5214, 5216, 5218, 5220, 5222 and 5224; Extension 5260, and Hinge Handle 5265.) |
| 9525 | Screw Extractor, 13/32" Drill |
| 9527 | Pipe Extractor, 1/2" Pipe |
| 9528 | Pipe Extractor, 3/4" Pipe |
| 9651 | Plastic-Handle Screwdriver, 2-7/8" Long, 9/32" Bit |
| 9682 | Plastic-Handle Screwdriver, 6-1/2" Long, Phillips #1 Bit |
| 9684 | Plastic-Handle Screwdriver, 8" Long, Phillips #2 Bit |
| 9704 | Wood-Handle Screwdriver, 9" Long, 9/32" Bit |
| 9708 | Wood-Handle Screwdriver, 14-13/16" Long, 13/32" Bit |
| 9710 | Wood-Handle Screwdriver, 16-3/4" Long, 13/32" Bit |
| 9732 | Wood-Handle Screwdriver, 8-7/8" Long, 7/32" Bit |

(For Tool Chests, See Pages 15-19.)

This set provides all of the tools needed for most plumbing jobs. It is recommended for War Veteran trainees, other apprentices, and plumbing companies that furnish or sell tools to their employees.

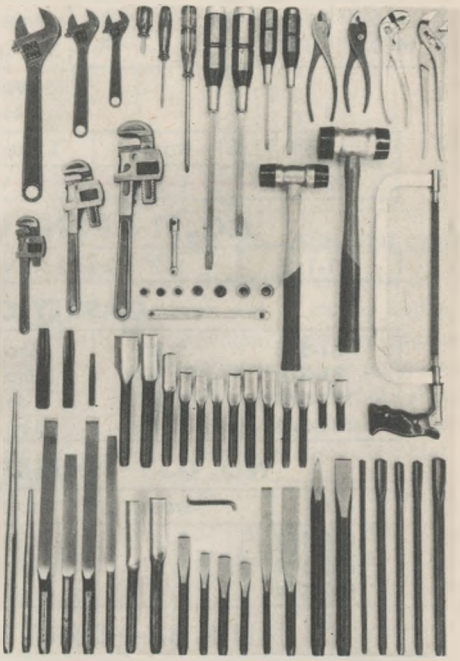

# No. 4000AA MASTER PULLER SET

Here is the most complete, useful and economical puller set ever offered. With the parts furnished it is possible to assemble ANY of the slide hammer, light-duty, medium-duty and heavy-duty pullers shown in Plomb's catalog. In addition, the set includes a wheel puller, a blind bearing puller, a single jaw puller and a cap screw crossarm.

You might guess that over a hundred parts would be needed to assemble so many pullers, but actually the set has only 42 items. This small number, resulting in low cost, is made possible by the interchangeability of Plomb's puller parts.

The set saves time and money by providing the equipment needed for a great many puller jobs with a low investment in parts.

| Quantity | No. | Description |
|---|---|---|
| 1 | 4001B | Wheel Puller Body, 6-3/4" Long |
| 3 | 4001J | Wheel Puller Leg, 6" Long |
| 1 | 4001S | Wheel Puller Screw, 8" Long |
| 1 | 4011 | Heavy-Duty Crossarm, 11" Long |
| 1 | 4012 | Heavy-Duty Screw, 11-1/4" Long |
| 2 | 4015 | Regular Jaw, 7-1/2" Long |
| 2 | 4016 | Regular Jaw, 10" Long |
| 2 | 4017 | Timing Gear Jaw, 10" Long |
| 2 | 4018 | Cap Screw Jaw, 6" Long |
| 1 | 4021 | Medium-Duty Crossarm, 7" Long |
| 1 | 4022 | Medium-Duty Screw, 6-3/4" Long |
| 2 | 4025 | Regular Jaw, 4" Long |
| 2 | 4026 | Regular Jaw, 6" Long |
| 1 | 4056C | Cap Screw Crossarm, 6" Long |
| 1 | 4056H | Sliding Hammer, 2-1/2 Lbs. |
| 3 | 4056J | Reversible Jaw, 3-1/2" Long |
| 3 | 4056L | Inside Jaw, 4-1/2" Long |
| 1 | 4056N | Reversible Adjusting Nut |
| 3 | 4056PN | Pin for Holding Jaw to Yoke |
| 1 | 4056R | T-Handled Rod, 24" Long |
| 1 | 4056S | Single Jaw, 2-15/16" Long |
| 1 | 4061 | Two-Jaw Crossarm, 2-1/2" Long |
| 1 | 4063 | Knurled Adjusting Nut |
| 3 | 4066 | Outside Jaw, 4-1/2" Long |
| 1 | 4071 | Three-Jaw Yoke |
| 1 | 4080 | Blind Bearing Puller |

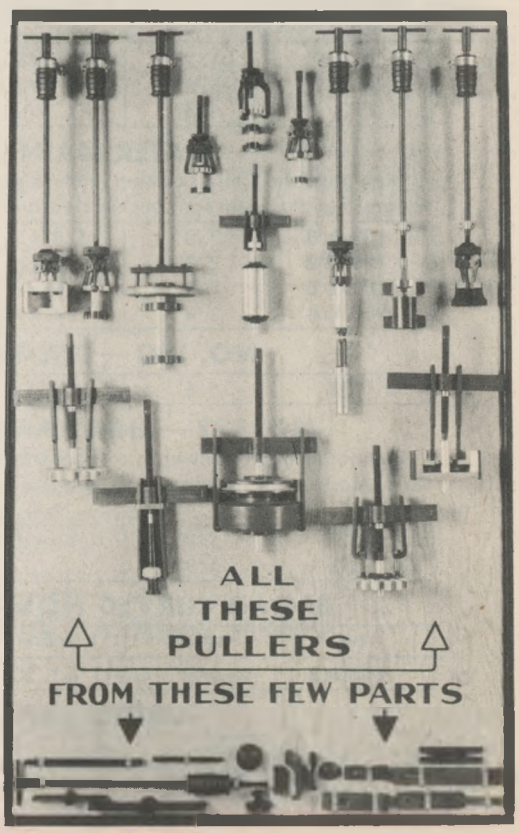

# SLIDE HAMMER PULLER SPECIFICATIONS

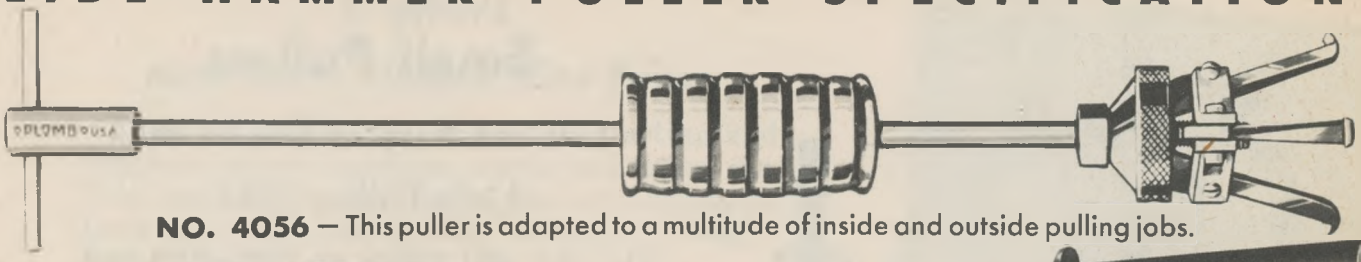

**NO. 4056** — This puller is adapted to a multitude of inside and outside pulling jobs.

4056C—Cap Screw Crossarm, 6" wide.



4056S—Single Jaw Puller Attachment, 2-15/16" long.

## JAWS

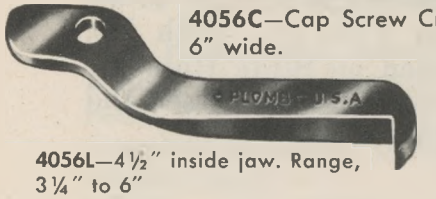

4056L—4½" inside jaw. Range, 3¼" to 6"

4056J—3½" Reversible Jaw. Pulling Range 0" to 3" Outside, 1¼" to 3¼" Inside.

4066—4½" outside jaw. Range, 3" to 4"

## PULLING COMBINATIONS POSSIBLE WITH 4071 3-WAY YOKE

With Jaws 4056J



With Jaws 4056J



With Jaws 4056L

With Jaws 4066

## PULLING COMBINATIONS POSSIBLE WITH ADDITION OF 4061 2-WAY YOKE

With Jaws 4056J

With Jaws 4056J

With Jaws 4066



With Jaws 4056L

## YOKES

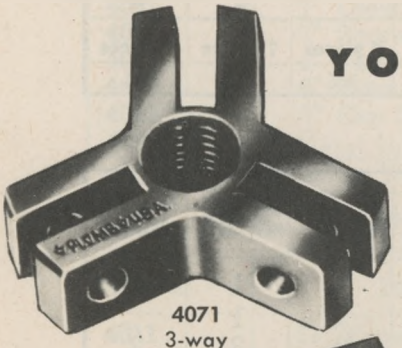

4071
3-way

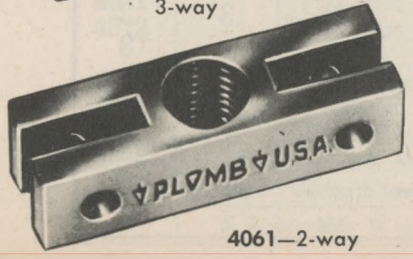

4061—2-way

## PARTS SPECIFICATIONS — SETS

| PART NO. | DESCRIPTION | 4056 | 4056A † | 4056B † |
|---|---|---|---|---|
| **4056R** | 24" T-Handled Rod | 1 | 1 | 1 |
| **4056H** | 2 1/2 Lb. Sliding Hammer | 1 | 1 | 1 |
| **4056N** | Reversible Adjusting Nut | 1 | 1 | 1 |
| **4071** | 3-Way Yoke | 1 | 1 | 1 |
| **4056PN** | Pin | 3 | 3 | 3 |
| **4056J** | 3 1/2" Reversible Jaw | 3 | — | 3 |
| **4056L** | 4 1/2" Inside Jaw | — | — | — |
| **4066** | 4 1/2" Outside Jaw | — | 3 | 3 |
| | Shipping Weight in Lbs. | 6 1/2 | 6 | 7 |

† ***CANNOT BE SHIPPED COMPLETE FROM FACTORY BUT CAN BE ASSEMBLED BY DISTRIBUTOR.***


No. 4060
2-Way Puller
Wt. 2 lbs.

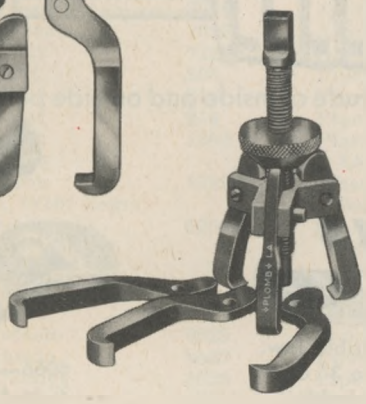
No. 4070
3-Way Puller
Wt. 2½ lbs.

# Small Pullers

## Fast and Easy to Use on the Little Pulling Jobs

The size and range of both 4060 and 4070 are the same.

Short jaws have range from 0″ to 3″ long jaws from 3″ to 4″. With No. 4056N, nut used on Slide Hammer Puller, short jaws can be reversed and used for inside pulling.


Showing the two-way cross arm No. 4061.

These two small pullers are designed to pull the little gears, pulleys, bearings quickly and easily. The narrow jaws get into very close places. Adjusting nut holds jaws firmly in position so they can't slip off. Any convenient wrench can be used on the ⅝″ square head of screw.

## No. 4060--Specifications

| No. | Description | No. Needed | Set No. 4060A | Set No. 4060B | Set No. 4060C | Set No. 4060D |
|---|---|---|---|---|---|---|
| 4061 | 2½″ Cross Arm | 1 | 1 | 1 | 1 | 1 |
| 4022 | 7″ Screw, 9/16″ sq. head | 1 | 1 | 1 | 1 | 1 |
| 4063 | Knurled Adjusting Nut, 1¾″ Diam. | 1 | 1 | 1 | 1 | |
| 4056PN | Pins for Cross Arm | 2 | 2 | 2 | 2 | 2 |
| 4056J | 3½″ Jaws, 0″ to 1½″ Range | 2 | 2 | 2 | | 2 |
| 4056N | Rev. Adj. Nut | | | | | 1 |
| 4066 | 4½″ Jaws, 0″ to 3″ Range | 2 | 2 | | 2 | 2 |
| | Number of Pieces | | 9 pieces | 7 pieces | 7 pieces | 9 pieces |
| | Shipping Weight in Pounds | | 1¾ | 1¼ | 1½ | 2½ |

## No. 4070--Specifications

| | | No. Needed | Set No. 4070A | Set No. 4070B | Set No. 4070C | Set No. 4070D |
|---|---|---|---|---|---|---|
| 4022 | 7″ Screw, 9/16″ sq. head | 1 | 1 | 1 | 1 | 1 |
| 4063 | Adjusting Nut, 1¾″ diameter | 1 | 1 | 1 | 1 | |
| 4056PN | Pins for Yoke | 3 | 3 | 3 | 3 | 3 |
| 4056J | 3½″ Jaws | 3 | 3 | 3 | | 3 |
| 4056N | Rev. Adj. Nut | | | | | 1 |
| 4066 | 4½″ Jaws | 3 | 3 | | 3 | 3 |
| 4071 | 3-Way Yoke | 1 | 1 | 1 | 1 | 1 |
| | Number of Pieces | | 12 pieces | 9 pieces | 9 pieces | 12 pieces |
| | Shipping Weight in Pounds | | 2¼ | 1½ | 2 | 3 |

# Pullers

## 4020 Sets--Medium Size Puller

Excellent Puller for generators, starting and armature gears, bearings, cones, ball races, etc. Thin hand-forged jaws have enormous strength. Jaws are easily and quickly adjusted. Weight complete with box, 4 lbs.

Illustration No. 4020A

## 4030 and 4010 Sets--Heavy Duty Puller

A Puller that handles the heaviest work. Pulls generator, starter and pinion gears, ball races, drive shaft bushings, wheels, etc. Weight complete with box, 14 lbs. Box similar to illustration above.

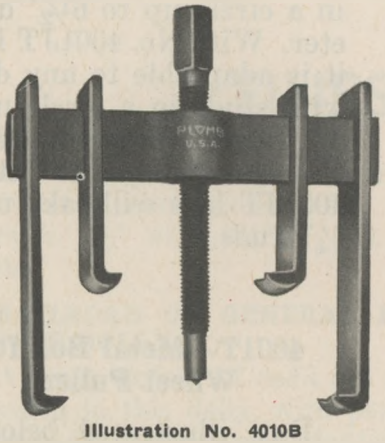
Illustration No. 4010B

PULLERS FOR *Industrial* USE

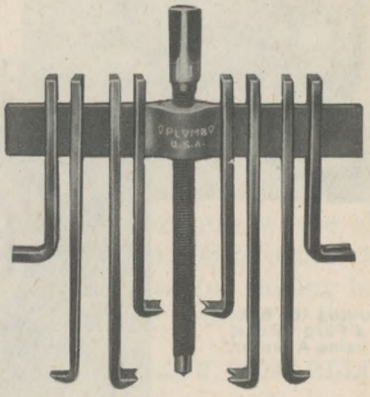
Illustration No. 4030B

## No. 4020 Parts Specifications Sets

| Cat. No. | Part | Inside Length Cross-arm to Hook | 4020A | 4020B | 4020C |
|---|---|---|---|---|---|
| 4021 | 7" Cross Arm | | 1 | 1 | 1 |
| 4022 | 7" Screw | | 1 | 1 | 1 |
| 4025 | 4" Jaws | 2" | 2 | 2 | 2 |
| 4026 | 6" Jaws | 4" | 2 | 2 | 2 |
| 4028 | 5" Cap Screw Jaws | 3" | | | 2 |
| 4029 | Metal Box 1⅛x3¾x7½ | | 1 | | 1 |
| | Shipping Weight in lbs. | | 4 | 3 | 4½ |

## No. 4030 Parts Specifications Sets

| Cat. No. | Part No. | Inside Length Cross-arm to Hook | 4030A | 4030B | 4010A | 4010B |
|---|---|---|---|---|---|---|
| 4011 | 11" Cross Arm | | 1 | 1 | 1 | 1 |
| 4012 | 11½" Screw ¾" sq. hd. | | 1 | 1 | 1 | 1 |
| 4015 | 7½" Jaws | 4¾" | 2 | 2 | 2 | 2 |
| 4016 | 10" Jaws | 7" | 2 | 2 | 2 | 2 |
| 4017 | 10" Timing Gear Jaws | 7" | 2 | 2 | | |
| 4018 | 6" Cap Screw Jaws | 3" | 2 | 2 | | |
| 4019 | Metal Box 1¾x5½x12 | | 1 | | 1 | |
| | Shipping Weight in lbs. | | 13½ | 12¼ | 9¾ | 8½ |

PLOMB TOOL COMPANY

*Streamlined Tools*

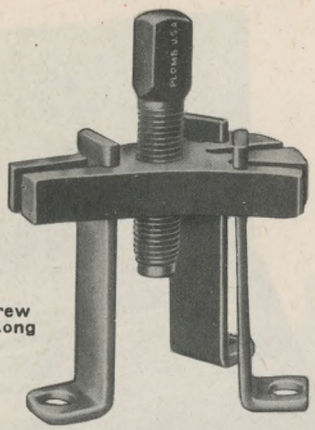





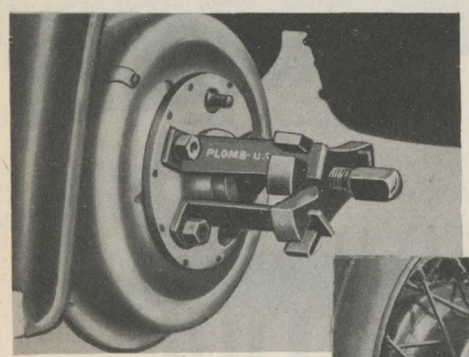

Universal Puller on a wire-wheel car.

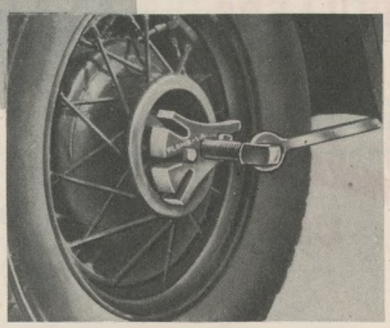

Pulling the hub of a Ford V8 car, using Adaptor.

# Universal Wheel Puller

**Handles Practically All Types of Wheels with 3, 4, 5, 6 and 7 Studs**

This is the simplest and fastest wheel puller made. It pulls wheels of practically every car. Legs shown are quickly adjustable to any drum with 3, 4, 5, 6 or 7 studs, in a circle up to 6½" diameter. With No. 4001JT Legs, it is adaptable to any drum with studs in a circle up to 8". Regular legs are drilled to take up to 9/16" studs; 4001JT legs will take up to ¾" studs.

The Plomb Universal Wheel Puller makes other types of wheel pullers obsolete. For all cars, including Ford with adaptor shown above at right, and light trucks. With No. 4001JT jaws, listed below, pulls wheels of light trucks, such as Chevrolet and International.

## Parts Specifications

| Cat. No. | Description | SETS | | |
|---|---|---|---|---|
| | | 4001 | 4001 A | 4001 TR |
| 4001B | Puller Body, 6¾" Long | 1 | 1 | 1 |
| 4001C | Ford Adaptor Cap Screws, 4½" Long | 2 | 2 | 2 |
| 4001J | Leg—Standard Foot, 6" Long | 3 | 3 | .... |
| 4001JT | Leg—Extra Long Foot 6" Long | .... | .... | 3 |
| 4001R | Ford Adaptor Ring | 1 | 1 | 1 |
| 4001S | 1" Puller Screw, 8" Long | 1 | 1 | 1 |
| 4001T | Box | .... | 1 | .... |
| | Shipping Weight in lbs. | 9½ | 11 | 11 |

### 4001T—Metal Box for Wheel Puller

Box, illustrated below is made of heavy-gauge sheet steel and the No. 4001 Wheel Puller fits into it as shown, 1½" deep, 8¼" wide, 8½" long. Three compartments.

No. 4001A—Wheel Puller in Metal Box.

# BODY AND FENDER TOOLS




1452

1454

1455

1458




1453




1457

# FINEST DOLLY BLOCKS

**1452 EGG-SHAPED DOLLY.**
A very popular shape, with many different curves and radii. 1⅝" thick, 2½" wide, 3¾" lg. Wt. 2¾ lbs.

**1453 RAILROAD OR GENERAL PURPOSE DOLLY.**
A large variety of radii are provided in this dolly, with perfect hand fit. Heavy weight for bumping out dents, thin beading edge and 7½ square inches of working area on the large face are responsible for its popularity. Weight 3 pounds.

**1454 RADIUS DOLLY.**
A useful design that has many radii. Bottom and one side flat, forming a right angle. 1$^{9}/_{32}$" thick, 2$^{3}/_{16}$" wide, 4½" lg. Wt. 2 lbs. 10 oz.

**1455 NEW BEAD DOLLY.**
Use for beads or rolled fenders. Start with wedge end and finish with curved top. The flat side can be worked under long curve of fender. Thin edge useful for corners and beading. Comfortable hand grip. 4⅜" long, 2¾" wide, 1⅞" thick at top. Wt. 2½ lbs.

**1457 SHRINKING DOLLY.**
The unique shape, low crowned surface of this dolly gives it an all-purpose use where shrinking of body metal is concerned. Excellent also for raising beads and moulding. Wt. 2¼ lbs.

**1458 HEEL DOLLY, SEMI-ELLIPTICAL.**
This dolly provides two flat and two crowned working surfaces. Especially useful in restricted places and can be used for shrinking metal. Wt. 2 lbs.

**1501 STRAIGHT FLEXIBLE PLOMB FILE.**
New, quick-cutting type with curved teeth. Finest quality you can buy. 1⅜" wide, 14" long.

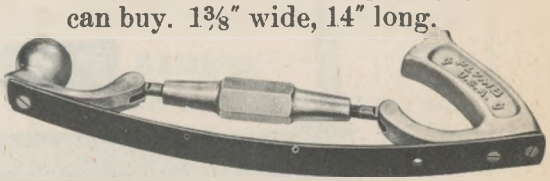

**1509 ADJUSTABLE FILE HOLDER.**
Made of aluminum, this fender file holder is light but strong. A file can be left straight or be made concave or convex with the simple turnbuckle adjuster.

# PLOMB TOOL COMPANY

*Streamlined Tools*

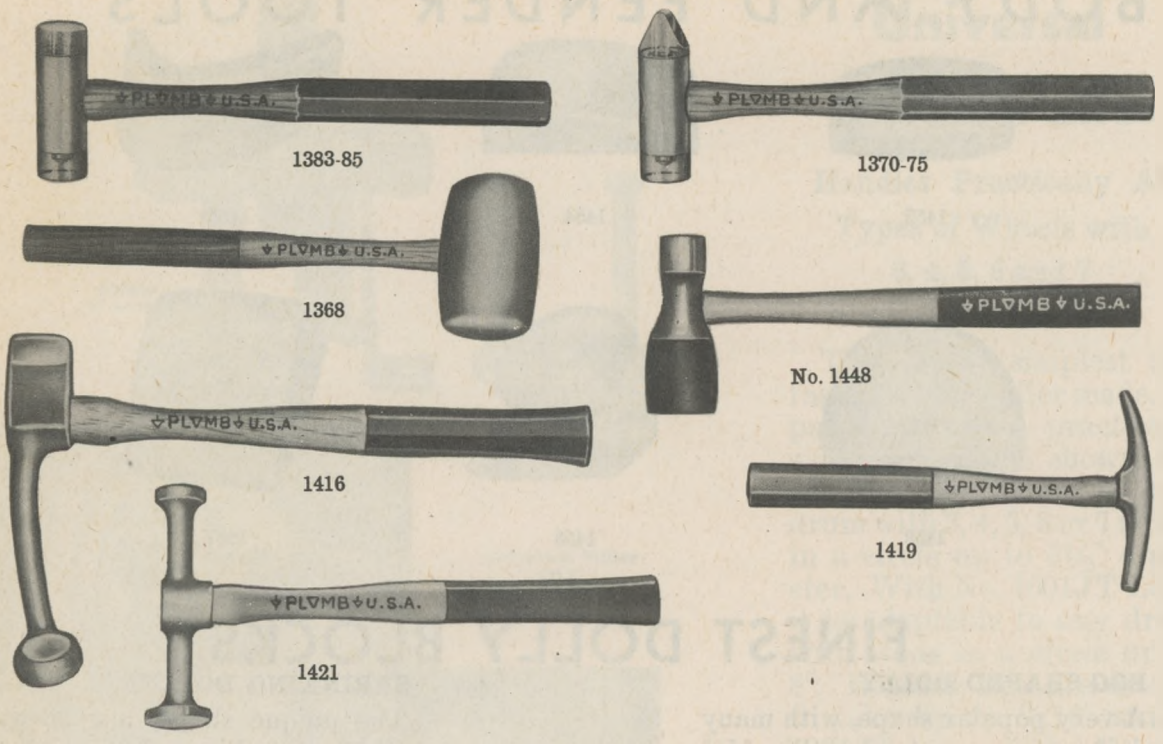


## HAMMERS

You will find a Plomb Hammer of every type for every purpose in Body and Fender Work.

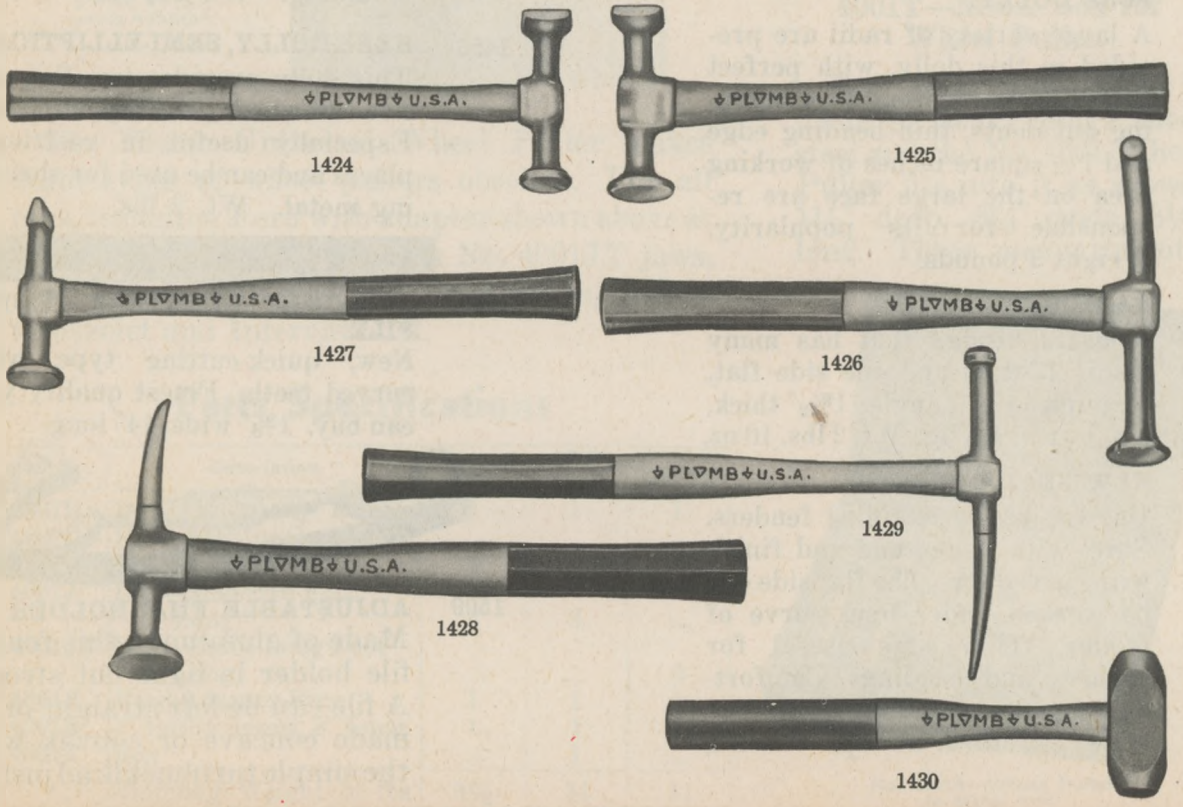


PREFERRED BY MEN WHO EARN THEIR LIVING WITH TOOLS

| No. | DESCRIPTION |
|---|---|
| 1368 | **RUBBER MALLET**<br>Every repair man finds this hammer a necessity especially where a metal hammer would mar the surface. Wt. 24 oz. Length 15″ |
| | **SOFT TIPPED HAMMERS**<br>Removable tips of molded plastic. Will stand lots of pounding and still not damage the surface of the material. A Plomb innovation is one end with round face, the other cross pein. |
| 1370 | 8-oz. **PLASTIC TIPPED HAMMER**<br>With Cross Pein Tip. |
| 1375 | 16-oz. **PLASTIC TIPPED HAMMER**<br>With Cross Pein Tip. |
| 1383 | 8-oz. **PLASTIC TIP HAMMER**<br>With Round Tips. |
| 1385 | 16-oz. **PLASTIC TIP HAMMER**<br>With Round Tips. |
| | Extra Tips for above. |
| 1370C | **RO. FACE TIPS** |
| 1370D | **CROSS PEIN TIPS** |
| 1416 | **LONG HEAD BUMPING HAMMER**<br>Provides extreme clearance for late model fenders. Weight decreased and perfect balance achieved by means of semi-I-beam. Neck head 9″, clearance 6¾″, wt. 2¾ lbs. |
| 1419 | **MAGNETIC TRIM HAMMER**<br>A favorite because of its long reach and head radii. The head is curved in about the arc of a natural swing. Length of head 5½″. Wt. 7 oz. |
| 1421 | **DINGING HAMMER**<br>Has large face for roughing the bad ones into shape for finishing. Head 6″ long, 1¼″ and 1⅝″ round. Faces slightly crowned. Wt. 1¼ lb. |

| No. | DESCRIPTION |
|---|---|
| 1424 | **FINISHING HAMMER**<br>Light of weight in perfect balance. Ro.face 1¼″ dia. slightly crowned 1-1/16″ sq. face. Wt. ½ lb. |
| 1425 | **FINISHING HAMMER**<br>Heavier than 1424. Weight about ¾ lb. Ro. face slightly crowned. 1½″ dia. with 1⅛″ sq. face. |
| 1426 | **LONG BODY FINISHING HAMMER**<br>For crowned fenders and other places where clearance is needed. 1⅜″ Ro. face slightly crowned. 3½″ clearance. Ro. cross pein 1⅛″ wide on other end. Has 4″ clearance. Wt. ¾ lb. |
| 1427 | **FINISHING HAMMER**<br>Has wedge shaped cross pein 1″ wide, 2½″ clearance. Used for fender beads corner along panel beading, etc. Ro. face 1⅜″ dia. slightly crowned 2″ clearance. Wt. ½ lb. |
| 1428 | **PECKING HAMMER**<br>Pointed end for picking out small dents. Ro. face for finishing. Head 5⅞″ long overall. 1½″ dia. slightly crowned Ro. face. Wt. 12 oz. |
| 1429 | **TURRET TOP PECKING HAMMER**<br>Eliminates uncomfortable reaching. Handle 18″ long, reaches to center of turret top. Head 9″ overall. Wt. 1 lb. This hammer combines along curved pecking point with long necked ball-pein. |
| 1430 | **BRASS HAMMER**<br>One of the most satisfactory soft hammers ever used. Wt. 1¾ lbs. |
| 1448 | **2-WAY HAMMER**<br>A Plomb two-way hammer for you. Steel head with rubber head opposed. Just the hammer for mounting tires—drawing rivets. Also used by plumbers, machinists and woodworkers. Wt. 2¼ lbs.<br>No. 1448B—Extra rubber heads. |

# PLOMB TOOL COMPANY

*Streamlined Tools*

## NEW Soft-Tip Hammers with the Miracle Plastic—NUPLAFLEX

Plomb proudly introduces a new line of soft-tip hammers, offering many advantages over previous types. Having literally a thousand uses, these hammers will prove to be indispensable for all tool users.

The tips are made of Nuplaflex, a revolutionary plastic with these important features:

1. SURFACE PROTECTION — Ideal for threads, for painted, polished and plated surfaces and for any parts that would be marred, scratched or otherwise damaged by a metal hammer.
2. SELF-HEALING — Recovers its original shape when bent or dented.
3. NO CHIPPING OR CRACKING — Doesn't flake under hard blows.
4. LONG LIFE — Tips last many times longer than others.
5. NON-EXPLOSIVE — Positively safe from explosions.
6. NON-SPARKING — Tips are safe around explosive dust, gasoline vapor and other fumes.
7. NO FIRE HAZARD — Won't burn readily unless held in flame. Approved by Underwriters' Laboratory.
8. OIL AND GREASE RESISTANT — An advantage in garages.
9. MINIMUM STING — Tips absorb most of vibration.
10. MINIMUM REBOUND — Reduces fatigue, and permits faster, more efficient work.
11. HARD OR EXTRA SOFT TIPS — Hard is for an all-purpose hammer. Extra soft is for wood, glass or plastics.

Tips of the same size are interchangeable. A hard tip and extra soft tip on one hammer will handle all types of work. Tips are easy to tell apart because of their different colors. An automatic locking feature anchors a tip securely when it is screwed into the head. However, tips are easily detachable.

Another distinctive feature is the streamlined head design. Tough hickory handles are octagonal and shaped to provide a sure grip.

The ten hard-tip hammers consist of five pairs, the two hammers in each pair having the same head size but different weights. Hard tips in five diameters and extra soft tips in two diameters are available.

Following are a few of the many specific uses for Nuplaflex Hammers: Automotive—body and fender work, painted and plated surfaces, tire changing (little rebound); Aviation—flight check-ups, metal forming, propeller assembly and installation, other repair jobs; Cabinet Making—no marring of delicate surfaces; Farm Implements—repair and adjustment work; Homes—to open jar tops, for many types of household repairs; Leathercraft—softening and stretching leathers; Machine Shops—set-ups, assemblies (protects threads, surfaces, etc.); Manufacturers—assembly work; Plumbing, Heating and Ventilating—prevents chipping and marring of paint, enamel, chrome, etc.

### HAMMERS — with Hard (Green) Tips

| Item No. | Weight Lbs. | Head Diam. | Head Length | Handle Length |
|---|---|---|---|---|
| 1388 | 5/16 | 1" | 3½" | 11⅜" |
| 1389 | ½ | 1" | 3½" | 11⅜" |
| 1390 | ¾ | 1½" | 4⅜" | 13" |
| 1391 | 1 | 1½" | 4⅜" | 13" |
| 1392 | 1¼ | 2" | 4½" | 14" |
| 1393 | 2 | 2" | 4½" | 14" |
| 1394 | 2 | 2½" | 5¼" | 15" |
| 1395 | 3½ | 2½" | 5¼" | 15" |
| 1396 | 3 | 3" | 6¼" | 18" |
| 1397 | 5 | 3" | 6¼" | 18" |

### HAMMERS — with Extra Soft (Amber) Tips

| | | | | |
|---|---|---|---|---|
| 1398 | ¾ | 1½" | 4⅜" | 13" |
| 1399 | 1¼ | 2" | 4½" | 14" |

### HAMMER TIPS
### Hard (Green)

| Item No. | Weight Oz. | Head Diameter |
|---|---|---|
| 1388T | 1 | 1" |
| 1390T | 2 | 1½" |
| 1392T | 3 | 2" |
| 1394T | 5 | 2½" |
| 1396T | 8 | 3" |



### HAMMER TIPS
### Extra Soft (Amber)

| | | |
|---|---|---|
| 1398T | 2 | 1½" |
| 1399T | 3 | 2" |

### HAMMER HANDLES

| No. | For Hammer Nos. | Eye Size | Length |
|---|---|---|---|
| 1308H | 1424 & 1427 | 11/32"x11/16" | 13-1/8" |
| 1324H | 1430 | 7/16"x7/8" | 16-1/8" |
| 1388H | 1388 & 1389 | 11/32"x9/16" | 11-3/8" |
| 1390H | 1390, 1391 & 1398 | 1/2"x3/4" | 13" |
| 1392H | 1392, 1393 & 1399 | 1/2"x3/4" | 14" |
| 1394H | 1394 & 1395 | 3/4"x1-1/16" | 15" |
| 1396H | 1396 & 1397 | 3/4"x1-1/8" | 18" |
| 1416H | 1416 & 1448 | 5/8"x1" | 17-3/8" |
| 1419H | 1419 | 15/32"x5/8" | 11-3/4" |
| 1426H | 1421, 1425, 1426 & 1428 | 13/32"x13/16" | 13" |
| 1429H | 1429 | 3/8"x11/16" | 17-3/8" |

# CHART OF STANDARD SIZES

| Hexagon—Thread Diam. of Bolts | | | | | | Size of Bolt Hd. or Nut In Inches | Square—Thread Diam. of Bolts | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| U. S. Standard | | S. A. E. | American Standard | | Mfrs. Std. | | U. S. Standard | | U.S.S. or Am. Std. | Amer. Std. | Mfrs. Std. |
| Bolts & Nuts | Cap Screws | Bolts & Nuts | Bolts & Nuts | Cap Screws | Bolt Heads | | Bolts & Nuts | Cap Screws | Set Screws | Bolts & Nuts | Bolt Heads |
| | | | 0 & 1 | | | 5/32 | | | | 0 & 1 | |
| | | | 2 & 3 | | | 3/16 | | | | 2 & 3 | |
| | | | | | | 7/32 | | | | | |
| | | | 4 | | | 1/4 | | | | 4 | |
| 1/8 | 1/8 | | 5 & 6 | | | 5/16 | | | 5/16 | 5 & 6 | |
| | | | 8 | | | 11/32 | | | | 8 | |
| | 3/16 | | 10 | | | 3/8 | | 1/4 | 3/8 | 10 | 1/4 |
| | 1/4 | 1/4 | 12 & 1/4 | 1/4 | 1/4 | 7/16 | | 5/16 | 7/16 | 12 & 1/4 | |
| | | | | | | 15/32 | | | | | 5/16 |
| 1/4 | 5/16 | 5/16 | | 5/16 | | 1/2 | 1/4 | 3/8 | 1/2 | | |
| | | | | | 5/16 | 17/32 | | | | | |
| | 3/8 | 3/8 | 5/16 | 3/8 | | 9/16 | | 7/16 | 9/16 | 5/16 | 3/8 |
| 5/16 | | | | | | 19/32 | 5/16 | | | | |
| | 7/16 | 7/16 | 3/8 | 7/16 | 3/8 | 5/8 | | 1/2 | 5/8 | 3/8 | |
| | | | | | | 21/32 | | | | | 7/16 |
| 3/8 | | | | | | 11/16 | 3/8 | 9/16 | | | |
| | | | | | 7/16 | 23/32 | | | | | |
| | 1/2 | 1/2 | 7/16 | 1/2 | | 3/4 | | 5/8 | 3/4 | 7/16 | 1/2 |
| 7/16 | | | | | | 25/32 | 7/16 | | | | |
| | 9/16 | | 1/2 | 9/16 | 1/2 | 13/16 | | | | 1/2 | |
| | | | | | | 27/32 | | | | | 9/16 |
| 1/2 | 5/8 | 9/16 | 9/16 | 5/8 | | 7/8 | 1/2 | 3/4 | 7/8 | 9/16 | |
| | | | | | 9/16 | 29/32 | | | | | |
| | | 5/8 | 5/8 | | | 15/16 | | | | 5/8 | 5/8 |
| 9/16 | | | | | | 31/32 | 9/16 | | | | |
| | 3/4 | | | 3/4 | 5/8 | 1 | | | 1 | | |
| 5/8 | | 3/4 | | | | 1 1/16 | 5/8 | | | | |
| | 7/8 | | 3/4 | 7/8 | | 1 1/8 | | 7/8 | | 3/4 | 3/4 |
| | | | | | 3/4 | 1 3/16 | | | | | |
| 3/4 | 1 | 7/8 | | | | 1 1/4 | 3/4 | 1 | 1 1/4 | | |
| | | | 7/8 | 1 | | 1 5/16 | | | | 7/8 | 7/8 |
| | 1 1/8 | | | | 7/8 | 1 3/8 | | 1 1/8 | | | |
| 7/8 | | 1 | | | | 1 7/16 | 7/8 | | | | |
| | 1 1/4 | | 1 | 1 1/8 | | 1 1/2 | | 1 1/4 | 1 1/2 | 1 | 1 |
| | | | | | 1 | 1 9/16 | | | | | |
| 1 | 1 3/8 | 1 1/8 | | | | 1 5/8 | 1 | | | | |
| | | | 1 1/8 | 1 1/4 | | 1 11/16 | | | | 1 1/8 | 1 1/8 |
| | | | | | 1 1/8 | 1 3/4 | | | | | |
| 1 1/8 | | 1 1/4 | | | | 1 13/16 | 1 1/8 | | | | |
| | | | 1 1/4 | | | 1 7/8 | | | | 1 1/4 | 1 1/4 |
| | | | | | 1 1/4 | 1 15/16 | | | | | |
| 1 1/4 | | 1 3/8 | | | | 2 | 1 1/4 | | | | |
| | | | | | 1 3/8 | 2 1/16 | | | | | 1 3/8 |
| 1 3/8 | | 1 1/2 | | | | 2 1/8 | | | | | |
| | | | 1 1/2 | | | 2 3/16 | 1 3/8 | | | | |
| | | | | | 1 1/2 | 2 1/4 | | | | 1 1/2 | 1 1/2 |
| 1 1/2 | | | | | | 2 5/16 | | | | | |
| | | | | | | 2 3/8 | 1 1/2 | | | | |
| | | | | | 1 5/8 | 2 7/16 | | | | | 1 5/8 |
| 1 5/8 | | | | | | 2 1/2 | | | | | |
| | | | 1 3/4 | | | 2 9/16 | 1 5/8 | | | | |
| | | | | | 1 3/4 | 2 5/8 | | | | 1 3/4 | 1 3/4 |
| 1 3/4 | | | | | | 2 11/16 | | | | | |
| 1 7/8 | | | | | | 2 3/4 | 1 3/4 | | | | |
| | | | 2 | | | 2 15/16 | 1 7/8 | | | | |
| 2 | | | | | | 3 | | | | 2 | |
| | | | 2 1/4 | | | 3 1/8 | 2 | | | | |
| 2 1/4 | | | | | | 3 3/8 | | 2 | | 2 1/4 | |
| | | | 2 1/2 | | | 3 1/2 | 2 1/4 | | | | |
| 2 1/2 | | | | | | 3 3/4 | | | | 2 1/2 | |
| | | | 2 3/4 | | | 3 7/8 | 2 1/2 | | | | |
| 2 3/4 | | | | | | 4 1/8 | | | | 2 3/4 | |
| | | | 3 | | | 4 1/4 | 2 3/4 | | | | |
| | | | | | | 4 1/2 | | | | 3 | |

**PLOMB TOOL CO.**

MAIN OFFICE
and PLANT
**LOS ANGELES CALIF.**

MANUFACTURERS OF

*Streamlined Tools*

PREFERRED BY MEN WHO
EARN THEIR LIVING WITH TOOLS

PRINTED
IN U. S. A.

# PRICE LIST P-4805

**Applies to Catalog Nos. 19, 19A and 19R**

## Effective March 15, 1948

The 40% Discount formerly allowed off "List" prices has already been deducted in arriving at these "Net" prices.

Attach to Plomb Tool Co. Price List P-4805

ommended prices to

ise taxes applying to roducts.

ıre subject to change

ıporarily unavailable.

•Sets NOT shipped complete from Factory, but which may be assembled by distributor.

Catalog page numbers apply to Catalog No. 19R, First Printing.

Alphabetical listings appear on last page.

Prices are subject to change without notice.

| Item No. | Net Price | Description | Cat. Page |
|---|---|---|---|
| **FEELER GAUGES** | | | |
| 000A | 1.26 | Standard Gauge Set | 60 |
| 000B | 1.14 | Step-Cut Gauge Set | 60 |
| 000C | .18 | Feeler Gauge Holder | 60 |
| 000D | 1.14 | Ignition Gauge Set | 60 |
| 000E | 1.14 | Brake Gauge Set | 60 |
| 000F | .21 | Short Gauge Container | |
| 000G | .41 | Long Gauge Container | |
| 000H | 1.47 | Short Gauge Set in 000F | |
| 000J | 3.29 | Long Gauge Set in 000G | |
| 000K | .96 | Spark Plug Gauge Set | |
| 0015 | .18 | Short Feeler Gauge | 60 |
| 003 to 040 | .14 | Short Feeler Gauges | 60 |
| 0015L | .36 | Long Feeler Gauge | 60 |
| 002L to 018L | .24 | Long Feeler Gauges | 60 |
| 004/6 to 011/13 | .24 | Step-Cut Gauges | 60 |
| **PUNCHES, CHISELS AND PLUMBING TOOLS** | | | |
| •1 | 12.09 | Punch and Chisel Set | 70 |
| •2 | 6.17 | Punch and Chisel Set | 70 |
| 5 7/16 | .98 | Floor Chisel, 5/8" Cut | 71 |
| 5 5/8 | 1.38 | Floor Chisel, 1" Cut | 71 |
| 5 3/4 | 1.58 | Floor Chisel, 1 3/16" Cut | 71 |
| 6 1/2x11 1/2 | 1.12 | Spring Yarning Iron | 71 |
| 6 5/8x12 | 1.24 | Spring Yarning Iron | 71 |
| 13 1/4x12 | .45 | Star Drill, 1/4" Cut | 71 |
| 13 5/16x12 | .54 | Star Drill, 5/16" Cut | 71 |
| 13 3/8x12 | .59 | Star Drill, 3/8" Cut | 71 |
| 13 1/2x12 | .66 | Star Drill, 1/2" Cut | 71 |
| 13 5/8x12 | .72 | Star Drill, 5/8" Cut | 71 |
| 13 3/4x12 | .87 | Star Drill, 3/4" Cut | 71 |
| 13 7/8x12 | 1.05 | Star Drill, 7/8" Cut | 71 |
| 13-1x12 | 1.38 | Star Drill, 1" Cut | 71 |
| 14 1/2x 11 1/2 | 1.19 | Offset Yarning Iron | 72 |
| 14 5/8x12 | 1.29 | Offset Yarning Iron | 72 |
| 14 3/4x14 | 1.59 | Offset Yarning Iron | 72 |
| 15 5/8 | 1.59 | Aligning Punch, 3/16" Pt. | 68 |
| 21 1/2In | .49 | Pony Calker, Inside | 72 |
| 21 1/2Out | .49 | Pony Calker, Outside | 72 |
| 30 3/4x12 | 1.47 | Rivet Cutter, 1/8" Cut | 68 |
| 33 1/2In | .59 | Long Calker, Inside | 72 |
| 33 1/2Out | .59 | Long Calker, Outside | 72 |
| 33 5/8In | .69 | Long Calker, Inside | 72 |
| 33 5/8Out | .69 | Long Calker, Outside | 72 |
| 033 1/2In | .69 | Offset Calker, Inside | 72 |
| 033 1/2Out | .69 | Offset Calker, Outside | 72 |
| 033 5/8In | .89 | Offset Calker, Inside | 72 |
| 033 5/8Out | .89 | Offset Calker, Outside | 72 |
| 35 1/4 | .59 | Offset Screwdriver, 3" | 66 |
| 36 1/4 | .64 | Offset Screwdriver, 4 3/4" | 66 |
| 36 5/16 | .79 | Offset Screwdriver, 5" | 66 |
| 36 3/8 | .84 | Offset Screwdriver, 6 1/8" | 66 |
| 37 1/2 | .49 | Soil Pipe Chisel, 5/8" Cut | 71 |
| 37 5/8 | .69 | Soil Pipe Chisel, 3/4" Cut | 71 |
| 37 3/4 | .89 | Soil Pipe Chisel, 7/8" Cut | 71 |
| 41 1/4 | .33 | Center Punch, 4 1/4" | 68 |
| 41 5/16 | .33 | Center Punch, 4 5/8" | 68 |
| 41 3/8 | .39 | Center Punch, 4 7/8" | 68 |
| 41 7/16 | .45 | Center Punch, 5 1/4" | 68 |
| 41 1/2 | .54 | Center Punch, 5 5/8" | 68 |
| 41 5/8 | .60 | Center Punch, 6" | 68 |
| 44 1/4 | .33 | Prick Punch, 4 3/4" | 68 |
| 44 5/16 | .39 | Prick Punch, 5" | 68 |
| 44 3/8 | .45 | Prick Punch, 5 1/4" | 68 |
| •47A | 3.91 | Rivet or Pin Punch Set | 70 |
| 47 1/4x1 1/16 | .39 | Rivet or Pin Punch, 4 3/8" | 68 |
| 47 1/4x3 3/32 | .39 | Rivet or Pin Punch, 4 3/4" | 68 |
| 47 5/16x1 1/8 | .45 | Rivet or Pin Punch, 5 1/4" | 68 |
| 47 5/16x5 3/32 | .45 | Rivet or Pin Punch, 5 5/8" | 68 |
| 47 3/8x3 3/16 | .45 | Rivet or Pin Punch, 6 1/8" | 68 |
| 47 7/16x7 3/32 | .54 | Rivet or Pin Punch, 6 5/8" | 68 |
| 47 1/2x1 1/4 | .60 | Rivet or Pin Punch, 7" | 68 |
| •50A | 3.07 | Starting Punch Set | 70 |
| 50 3/16 | .33 | Starting Punch, 1/16" Pt. | 68 |
| 50 1/4 | .33 | Starting Punch, 3/32" Pt. | 68 |
| 50 5/16 | .39 | Starting Punch, 1/8" Pt. | 68 |
| 50 3/8 | .39 | Starting Punch, 3/16" Pt. | 68 |
| 50 7/16 | .45 | Starting Punch, 7/32" Pt. | 68 |
| 50 1/2 | .54 | Starting Punch, 1/4" Pt. | 68 |
| 72 1/4 | .39 | Cape Chisel, 5/32" Cut | 68 |
| 72 5/16 | .44 | Cape Chisel, 3/16" Cut | 68 |
| 72 3/8 | .49 | Cape Chisel, 1/4" Cut | 68 |
| 72 1/2 | .59 | Cape Chisel, 5/16" Cut | 68 |
| 72 5/8 | .74 | Cape Chisel, 3/8" Cut | 68 |
| 76 1/4 | .39 | Diamond Chisel, 5/32" Cut | 68 |
| 76 5/16 | .44 | Diamond Chisel, 3/16" Cut | 68 |
| 76 3/8 | .49 | Diamond Chisel, 1/4" Cut | 68 |
| 76 1/2 | .59 | Diamond Chisel, 5/16" Cut | 68 |
| 76 5/8 | .74 | Diamond Chisel, 3/8" Cut | 68 |
| 80 1/4 | .33 | Rd. Nose Chisel, 5/32" Cut | 68 |
| 80 5/16 | .39 | Rd. Nose Chisel, 3/16" Cut | 68 |
| 80 3/8 | .45 | Rd. Nose Chisel, 1/4" Cut | 68 |
| 80 5/8 | .72 | Rd. Nose Chisel, 3/8" Cut | 68 |

| Item No. | Net Price | Description | Cat. Page |
|---|---|---|---|
| **PUNCHES, CHISELS AND PLUMBING TOOLS —Continued** | | | |
| 84 3/4 | 1.47 | Concrete Gad, 12" | 71 |
| 84 7/8 | 1.59 | Concrete Gad, 12" | 71 |
| 84-1 | 1.86 | Concrete Gad, 12" | 71 |
| •86AA | 5.08 | Cold Chisel Set | 69 |
| 86A 3/16 | .29 | Cold Chisel, 1/4" Cut | 69 |
| 86A 1/4 | .34 | Cold Chisel, 5/16" Cut | 69 |
| 86A 5/16 | .39 | Cold Chisel, 3/8" Cut | 69 |
| 86A 3/8 | .44 | Cold Chisel, 7/16" Cut | 69 |
| 86A 7/16 | .54 | Cold Chisel, 1/2" Cut | 69 |
| 86A 1/2 | .64 | Cold Chisel, 5/8" Cut | 69 |
| 86A 5/8 | .74 | Cold Chisel, 3/4" Cut | 69 |
| 86A 3/4 x7 1/2 | .99 | Cold Chisel, 7/8" Cut | 69 |
| 86A 3/4 x12 | 1.49 | Cold Chisel, 7/8" Cut | 69 |
| 86A 7/8 x8 | 1.29 | Cold Chisel, 1" Cut | 69 |
| 86A 7/8 x12 | 1.79 | Cold Chisel, 1" Cut | 69 |
| 86A1x8 | 1.39 | Cold Chisel, 1 3/16" Cut | 69 |
| •96A | 5.77 | Drift Punch Set | 69 |
| 96 1/4 | .54 | Drift Punch, 3/32" Point | 69 |
| 96 5/16 | .66 | Drift Punch, 1/8" Point | 69 |
| 96 3/8 | .72 | Drift Punch, 3/16" Point | 69 |
| 96 7/16 | .78 | Drift Punch, 7/32" Point | 69 |
| 96 1/2 | .93 | Drift Punch, 1/4" Point | 69 |
| 96 5/8 | 1.14 | Drift Punch, 5/16" Point | 69 |
| 96 3/4 | 1.32 | Drift Punch, 3/8" Point | 69 |
| 100 | .30 | Key Ring Screwdriver | 65 |
| :100HR | 5.08 | Hip-Roof Tool Box | |
| 109 | 1.49 | Water Main Calker | 72 |
| 110 | 1.19 | Broad Nose Calking Iron | 72 |
| 130 | 2.19 | Ceiling Calker | 71 |
| 131 5/8 | .99 | Gasket Calker | 72 |
| 131 3/4 | 1.29 | Gasket Calker | 72 |
| 132L | 1.56 | Left Calker | 71 |
| 132R | 1.56 | Right Calker | 71 |
| 136 | 1.98 | Tube Expander, 3 Steps | 72 |
| 145 | 1.80 | Int. Nipple Wrench, 3/4". | |
| **PLIERS AND HACKSAWS** | | | |
| 201 | .92 | Thin Jaw Plier, 5" | |
| 202 | .98 | Thin Jaw Plier, 6" | |
| 203 | 1.39 | Bent Nose Plier, 30°, 7" | |
| 206 | 2.09 | Diagonal Plier, 6" | 62 |
| 209 | 1.98 | Diagonal Plier, 7" | 62 |
| 215 | 2.28 | Brake Spring Plier, 12" | 62 |
| 218 | 1.39 | Battery Plier, 8" | 62 |
| 226 | 2.09 | Needle Nose Plier, 6" | 62 |
| 227 | 2.47 | Duck Bill Plier, 8" | 63 |
| 235 | 1.40 | Ignition Plier, 4 1/2" | 63 |
| 235B | .12 | Rivet & Washer for 235 | 63 |
| 236 | 1.65 | Parrot Nose Wrench Pl., 6" | |
| 238 | 1.95 | Parrot Nose Wrench Pl., 7" | |
| 240 | 2.47 | Hvy. Water Pump Pl., 9 1/2" | 63 |
| 240B | .20 | Bolt & Nut for 240 | 63 |
| 241 | 1.65 | Lt. Water Pump Plier, 9 1/2" | |
| 246 | 1.35 | Comb. Side Cut Plier, 6" | |
| 257 | 1.65 | Heavy Universal Plier, 7" | |
| 258 | 1.50 | Gas Plier, 8" | |
| 260 | 1.65 | Telephone Plier, 6" | |
| 266 | 2.09 | Lineman's Plier, 6" | |
| 268 | 3.00 | Lineman's Plier, 8" | |
| 275 | .68 | Combination Plier, 5" | |
| 276 | .74 | Combination Plier, 6" | |
| 278 | .95 | Combination Plier, 8" | |
| 280 | 1.35 | Combination Plier, 10" | |
| 344 | 1.25 | Low-Clearance Hacksaw | |
| 351 | 3.32 | Adjustable Hacksaw | |
| 360 | 1.80 | Adjustable Hacksaw | |

| Item No. | Net Price | Description | Cat. Page |
|---|---|---|---|
| **ADJUSTABLE AND PIPE WRENCHES** | | | |
| 704 | 1.39 | Adjustable Wrench, 4" | 56 |
| 704S | 1.10 | Same as 704, Semi-Finish | |
| 706 | 1.39 | Adjustable Wrench, 6" | 56 |
| 706S | 1.10 | Same as 706, Semi-Finish | |
| 708 | 1.65 | Adjustable Wrench, 8" | 56 |
| 708S | 1.33 | Same as 708, Semi-Finish | |
| 710 | 2.09 | Adjustable Wrench, 10" | 56 |
| 710S | 1.65 | Same as 710, Semi-Finish | |
| 712 | 3.09 | Adjustable Wrench, 12" | 56 |
| 712S | 2.49 | Same as 712, Semi-Finish | |
| 716S | 3.81 | Adj. Wrench, 16", Semi-Fin. | |
| 720S | 5.55 | Adj. Wrench, 20", Semi-Fin. | |
| 806 | 1.08 | Pipe Wrench, 6" | |
| 808 | 1.25 | Pipe Wrench, 8" | |
| 810 | 1.62 | Pipe Wrench, 10" | |
| 814 | 2.19 | Pipe Wrench, 14" | |
| 818 | 3.13 | Pipe Wrench, 18" | |
| 824 | 5.41 | Pipe Wrench, 24" | |
| **HEAVY-DUTY 12-POINT BOX WRENCHES** | | | |
| :1036 | 1.45 | 11/16"x7/8" Openings | 45 |
| :1041 | 2.55 | 7/8"x1 1/16" Openings | 45 |
| :1045 | 2.55 | 15/16"x1" Openings | 45 |
| :1051 | 2.97 | 1 1/16"x1 1/4" Openings | 45 |
| :1053 | 2.97 | 1 1/8"x1 5/16" Openings | 45 |
| :1061 | 3.93 | 1 1/4"x1 7/16" Openings | 45 |
| :1063 | 4.07 | 1 7/16"x1 5/8" Openings | 45 |
| :1066 | 7.04 | 1 13/16"x2" Openings | 45 |
| :1069 | 8.97 | 2 3/16"x2 3/8" Openings | 45 |
| **15°-ANGLE 12-POINT BOX WRENCHES** | | | |
| 1100BA | 3.60 | Set of 4 Wrenches | |
| 1100F | 15.85 | Set of 10 Wrenches in Kit | 47 |
| 1120 | .83 | 5/16"x3/8" Openings | 46 |
| 1122 | .83 | 3/8"x7/16" Openings | 46 |
| 1125 | .83 | 7/16"x1/2" Openings | 46 |
| 1126 | .86 | 1/2"x9/16" Openings | 46 |
| 1127 | .92 | 1/2"x19/32" Openings | 46 |
| 1130 | .94 | 9/16"x5/8" Openings | 46 |
| 1131 | 1.08 | 5/8"x3/4" Openings | 46 |
| 1134 | 1.14 | 5/8"x11/16" Openings | 46 |
| 1135 | 1.21 | 11/16"x3/4" Openings | 46 |
| 1136 | 1.27 | 11/16"x7/8" Openings | 46 |
| 1137 | 1.27 | 11/16"x25/32" Openings | 46 |
| 1139 | 1.34 | 3/4"x7/8" Openings | 46 |
| 1140 | 1.47 | 13/16"x7/8" Openings | 46 |
| 1141 | 2.32 | 7/8"x1 1/16" Openings | 46 |
| 1145 | 2.32 | 15/16"x1" Openings | 46 |
| 1147 | 2.64 | 15/16"x1 1/16" Openings | 46 |
| 1150 | 2.64 | 1 1/16"x1 1/8" Openings | 46 |
| 1151 | 2.96 | 1 1/16"x1 1/4" Openings | 46 |
| 1155 | 3.06 | 1 1/4"x1 5/16" Openings | 46 |
| 1160 | 3.34 | 1 1/4"x1 3/8" Openings | 46 |
| 1161 | 3.50 | 1 1/4"x1 7/16" Openings | 46 |
| 1162 | 4.13 | 1 7/16"x1 1/2" Openings | 46 |
| 1163 | 5.09 | 1 7/16"x1 5/8" Openings | 46 |
| 1164 | 5.72 | 1 5/8"x1 11/16" Openings | 46 |
| **COMBINATION 12-POINT BOX AND OPEN END WRENCHES** | | | |
| 1200BA | 5.83 | Set of 6 Wrenches | |
| 1200F | 26.74 | Set of 15 Wrenches in Kit | 51 |
| 1210 | .81 | 5/16" Openings | 50 |
| 1212 | .83 | 3/8" Openings | 50 |
| 1214 | .91 | 7/16" Openings | 50 |
| 1216 | 1.00 | 1/2" Openings | 50 |
| 1218 | 1.08 | 9/16" Openings | 50 |
| 1220 | 1.20 | 5/8" Openings | 50 |
| 1222 | 1.32 | 11/16" Openings | 50 |

| Item No. | Net Price | Description | Cat. Page |
|---|---|---|---|
| 1224 | 1.48 | 3/4" Openings | 50 |
| 1226 | 1.55 | 13/16" Openings | 50 |
| 1228 | 1.61 | 7/8" Openings | 50 |
| 1230 | 1.81 | 15/16" Openings | 50 |
| 1232 | 1.95 | 1" Openings | 50 |
| 1234 | 2.35 | 1 1/16" Openings | 50 |
| 1236 | 2.84 | 1 1/8" Openings | 50 |
| 1240 | 3.16 | 1 1/4" Openings | 50 |
| 1242 | 4.03 | 1 5/16" Openings | 50 |
| 1244 | 4.37 | 1 3/8" Openings | 50 |
| 1246 | 4.37 | 1 7/16" Openings | 50 |
| **HAMMER HANDLES AND MALLET** | | | |
| 1308H | .30 | Handle for 1424 & 1427 | |
| 1324H | .36 | Handle for 1430 | |
| 1368 | 1.87 | Rubber Mallet | 79 |
| **PLASTIC TIP HAMMERS AND PARTS** | | | |
| 1370 | 2.04 | Hammer, 8 oz. | 79 |
| 1370C | .48 | Round Plastic Tip | 79 |
| 1370D | .72 | Cross Pein Plastic Tip | 79 |
| 1370H | .30 | Handle for 1370, 1375, 1383 & 1385 | |
| 1375 | 2.34 | Hammer, 1 Lb. | 79 |
| 1383 | 1.80 | Hammer, 8 Oz. | 79 |
| 1385 | 2.16 | Hammer, 1 Lb. | 79 |
| 1388 | 1.92 | Hammer, 5Oz., Hard, 1" | |
| 1388AA | 20.22 | Hammer Mdsg. Package | |
| 1388H | .33 | Handle for 1388 & 1389 | |
| 1388T | .50 | Tip, 1 Oz., Hard, 1" D. | |
| 1389 | 2.13 | Hammer, 8Oz., Hard, 1" | |
| 1390 | 2.91 | Hammer, 12Oz., Hard, 1 1/2" | |
| 1390H | .46 | Handle for 1390, 1391 & 1398 | |
| 1390T | .70 | Tip, 2 Oz., Hard, 1 1/2" D. | |
| 1391 | 3.24 | Hammer, 1Lb., Hard, 1 1/2" | |
| 1392 | 4.11 | Hammer, 1 1/4 Lb., Hard, 2" | |
| 1392H | .49 | Handle for 1392, 1393 & 1399 | |
| 1392T | 1.10 | Tip, 3 Oz., Hard, 2" D. | |
| 1393 | 4.65 | Hammer, 2Lb., Hard, 2" | |
| 1394 | 6.60 | Hammer, 2Lb., Hard, 2 1/2" | |
| 1394H | .49 | Handle for 1394 & 1395 | |
| 1394T | 2.25 | Tip, 5 Oz., Hard, 2 1/2" D. | |
| 1395 | 7.65 | Ham'r, 3 1/2 Lb., Hard, 2 1/2" | |
| 1396 | 9.84 | Hammer, 3 Lb., Hard, 3" | |
| 1396H | .67 | Handle for 1396 & 1397 | |
| 1396T | 3.70 | Tip, 8 Oz., Hard, 3" D. | |
| 1397 | 10.92 | Hammer, 5Lb., Hard, 3" | |
| 1398 | 2.91 | Hammer, 12Oz., Soft, 1 1/2" | |
| 1398T | .70 | Tip, 2 Oz., Soft, 1 1/2" D. | |
| 1399 | 4.11 | Hammer, 1 1/4 Lb., Soft, 2" | |
| 1399T | 1.10 | Tip, 3 Oz., Soft, 2" D. | |
| **BODY AND FENDER TOOLS** | | | |
| 1400SP | 1.50 | Set of 3 Solder Paddles | |
| 1411 | .50 | Flat Solder Paddle, 1 11/16" W. | |
| 1412 | .50 | Curved Solder Paddle | |
| 1413 | .50 | Flat Solder Paddle, 1" W. | |
| 1416 | 3.69 | Long Bumping Hammer | 79 |
| 1416H | .45 | Handle for 1416 & 1448 | |
| 1419 | 2.37 | Magnetic Trim Hammer | 79 |
| 1419H | .27 | Handle for 1419 | |
| 1421 | 2.58 | Dinging Hammer | 79 |
| 1424 | 2.28 | Finishing Hammer | 79 |
| 1425 | 2.58 | Finishing Hammer | 79 |
| 1426 | 2.79 | Finishing Hammer | 79 |
| 1426H | .33 | Handle for 1421, 1425, 1426 & 1428 | |
| 1427 | 2.28 | Finishing Hammer | 79 |
| 1428 | 2.52 | Pecking Hammer | 79 |
| 1429 | 2.79 | Pecking Hammer | 79 |
| 1429H | .45 | Handle for 1429 | |
| 1430 | 2.70 | Brass Hammer | 79 |
| 1448 | 2.52 | Two-Way Hammer | 79 |
| 1448B | .78 | Rubber Head for 1448 (Handle 1416H Fits Hammer 1448) | 79 |
| 1452 | 2.16 | Egg-Shaped Dolly | 77 |
| 1453 | 3.57 | All-Purpose Dolly | 77 |
| 1454 | 2.10 | Radius Dolly | 77 |
| 1455 | 1.98 | Bead Dolly | 77 |
| 1457 | 1.98 | Shrinking Dolly | 77 |
| 1458 | 1.98 | Heel Dolly | 77 |
| 1501 | 3.20 | Fender File | 77 |
| 1508 | 2.73 | File Holder, Wood | 77 |
| 1509 | 3.75 | File Holder, Aluminum | |
| 1526 | 1.35 | Ripping or Cutting Chisel | |
| **OBSTRUCTION 12-POINT BOX WRENCHES** | | | |
| 1725 | 1.44 | 7/16"x1/2" Openings | 57 |
| 1730 | 1.62 | 9/16"x5/8" Openings | 57 |
| 1731 | 1.74 | 5/8"x3/4" Openings | |
| **BRAKE TOOL, BARS AND RIM WRENCHES** | | | |
| 2006 | .84 | Brake Adjusting Tool | |
| 2110 | 2.67 | Grease Bar | 61 |
| 2116 | 1.35 | Garage Bar, 16" | 61 |
| 2120 | 1.95 | Garage Bar, 18" | 61 |
| 2124 | 2.67 | Garage Bar, 24" | 61 |
| 2126 | 1.83 | Rolling Head Bar, 16" | 61 |
| 2130 | 2.22 | Rolling Head Bar, 18" | 61 |
| 2135 | 18.84 | Adjustable Bending Bar | |
| 2135B | 5.64 | Body for 2135 | |
| 2135H | 2.04 | Handle for 2135 | |
| 2135L | 5.58 | Lower Arm for 2135 | |
| 2135S | 5.58 | Upper Arm for 2135 | |
| 2151 | 2.13 | Four-Way Rim Wrench | |
| **MUFFLER AND ENGINE TOOLS** | | | |
| 2301 | 1.17 | Muffler Removal Tool | |
| 2335 | 1.17 | Valve Guide Cleaner | 58 |
| 2335B | .45 | Five Blades for 2335 | |
| 2336 | 1.29 | Gasket Scraper | 58 |
| 2337 | .60 | Flexible Carbon Scraper | 58 |
| **TOOL KITS** | | | |
| :2401 | 1.82 | 8"x26" Flat | 19 |
| :2402 | 1.18 | 13 1/4"x15" Flat | 19 |
| :2403 | .64 | 8 3/4"x10" Flat | 19 |
| :2404 | 1.00 | 10 1/2"x16 1/2" Flat | 19 |
| :2405 | 1.26 | 14 3/4"x17 7/8" Flat | 19 |
| :2406 | 2.13 | 21 1/4"x21 5/8" Flat | 19 |
| :2408 | .76 | 8 1/2"x13 3/4" Flat | 19 |
| :2410 | .93 | 8 1/8"x12 5/8" Flat | 19 |
| :2411 | .51 | 6 1/2"x8 1/4" Flat | 19 |
| :2413 | 2.84 | 25 1/2"x25 3/8" Flat | 19 |
| :2450 | .96 | Leather Kit, 7"x9" | |
| **SPUD END 12-POINT BOX WRENCHES** | | | |
| :2613 | 2.52 | 13/16" Opening | 45 |
| :2615 | 2.59 | 15/16" Opening | 45 |
| :2617 | 2.66 | 1 1/16" Opening | 45 |
| :2618 | 2.74 | 1 1/8" Opening | 45 |
| :2620 | 2.88 | 1 1/4" Opening | 45 |
| :2623 | 3.82 | 1 7/16" Opening | 45 |
| :2624 | 4.10 | 1 1/2" Opening | 45 |
| :2626 | 4.46 | 1 5/8" Opening | 45 |
| :2627 | 4.61 | 1 11/16" Opening | 45 |
| :2629 | 4.75 | 1 13/16" Opening | 45 |
| :2630 | 4.90 | 1 7/8" Opening | 45 |
| :2632 | 5.04 | 2" Opening | 45 |
| :2635 | 6.62 | 2 3/16" Opening | 45 |
| :2638 | 7.49 | 2 3/8" Opening | 45 |

| Item No. | Net Price | Description | Cat. Page |
|---|---|---|---|
| **SPUD END 12-POINT BOX WRENCHES—Contd.** | | | |
| :2641 | 8.50 | 2 9/16" Opening | 45 |
| :2644 | 9.94 | 2 3/4" Opening | 45 |
| :2647 | 11.00 | 2 15/16" Opening | 45 |
| :2650 | 12.10 | 3 1/8" Opening | 45 |
| **STRIKING 12-POINT BOX WRENCHES** | | | |
| *:2613SW | 3.96 | 13/16" Opening | |
| *:2615SW | 4.03 | 15/16" Opening | |
| :2617SW | 4.10 | 1 1/16" Opening | 41 |
| :2618SW | 4.17 | 1 1/8" Opening | 41 |
| :2620SW | 4.32 | 1 1/4" Opening | 41 |
| :2621SW | 4.61 | 1 5/16" Opening | 41 |
| :2623SW | 5.26 | 1 7/16" Opening | 41 |
| :2624SW | 5.54 | 1 1/2" Opening | 41 |
| :2626SW | 5.91 | 1 5/8" Opening | 41 |
| :2627SW | 6.00 | 1 11/16" Opening | 41 |
| :2629SW | 6.20 | 1 13/16" Opening | 41 |
| :2630SW | 6.34 | 1 7/8" Opening | 41 |
| :2632SW | 6.48 | 2" Opening | 41 |
| :2635SW | 8.07 | 2 3/16" Opening | 41 |
| :2638SW | 8.93 | 2 3/8" Opening | 41 |
| :2641SW | 9.93 | 2 9/16" Opening | 41 |
| :2644SW | 13.52 | 2 3/4" Opening | 41 |
| :2647SW | 15.10 | 2 15/16" Opening | 41 |
| :2650SW | 17.85 | 3 1/8" Opening | 41 |
| **15° OPEN END WRENCHES** | | | |
| 3000BA | 2.93 | Set of 4 Wrenches | |
| 3000H | 13.42 | Set of 10 Wrenches in Kit | 55 |
| 3018 | .49 | 1/4"x5/16" Openings | 54 |
| 3020 | .52 | 5/16"x3/8" Openings | 54 |
| 3021 | .61 | 3/8"x7/16" Openings | 54 |
| 3025 | .67 | 7/16"x1/2" Openings | 54 |
| 3026 | .73 | 1/2"x9/16" Openings | 54 |
| 3027 | .80 | 1/2"x19/32" Openings | 54 |
| 3030 | .86 | 9/16"x5/8" Openings | 54 |
| 3031 | 1.10 | 5/8"x3/4" Openings | 54 |
| 3032 | 1.13 | 19/32"x25/32" Openings | 54 |
| 3034 | 1.13 | 5/8"x11/16" Openings | 54 |
| 3035 | 1.13 | 11/16"x3/4" Openings | 54 |
| 3036 | 1.47 | 1 1/16"x7/8" Openings | 54 |
| 3037 | 1.47 | 1 1/16"x25/32" Openings | 54 |
| 3039 | 1.47 | 3/4"x7/8" Openings | 54 |
| 3040 | 1.47 | 13/16"x7/8" Openings | 54 |
| 3041 | 1.87 | 7/8"x1 1/16" Openings | 54 |
| 3045 | 1.99 | 15/16"x1" Openings | 54 |
| 3047 | 1.99 | 15/16"x1 1/16" Openings | 54 |
| 3050 | 2.33 | 1 1/16"x1 1/8" Openings | 54 |
| 3051 | 2.72 | 1 1/16"x1 1/4" Openings | 54 |
| 3055 | 3.64 | 1 1/4"x1 5/16" Openings | 54 |
| 3060 | 3.98 | 1 3/8"x1 7/16" Openings | 54 |
| 3061 | 3.98 | 1 1/4"x1 7/16" Openings | 54 |
| 3062 | 4.96 | 1 3/8"x1 1/2" Openings | 54 |
| 3065 | 5.63 | 1 7/16"x1 5/8" Openings | 54 |
| 3070 | 5.94 | 1 1/2"x1 5/8" Openings | 54 |
| **15°-60° MIDGET OPEN END WRENCHES** | | | |
| 3210 | .64 | 13/64"x15/64" Openings | 52 |
| 3211 | .64 | 15/64"x13/64" Openings | 52 |
| 3215 | .67 | 7/32"x1/4" Openings | 52 |
| 3216 | .67 | 1/4"x7/32" Openings | 52 |
| 3220 | .70 | 9/32"x5/16" Openings | 52 |
| 3221 | .70 | 5/16"x9/32" Openings | 52 |
| 3225 | .73 | 11/32"x3/8" Openings | 52 |
| 3226 | .73 | 3/8"x11/32" Openings | 52 |
| **15°-80° MIDGET OPEN END WRENCHES** | | | |
| 3314 | .64 | 7/32"x7/32" Openings | 52 |
| 3315 | .64 | 15/64"x15/64" Openings | 52 |
| 3316 | .67 | 1/4"x1/4" Openings | 52 |
| 3318 | .70 | 9/32"x9/32" Openings | 52 |
| 3320 | .70 | 5/16"x5/16" Openings | 52 |
| 3322 | .73 | 11/32"x11/32" Openings | 52 |
| 3324 | .73 | 3/8"x3/8" Openings | 52 |
| 3328 | .80 | 7/16"x7/16" Openings | 52 |
| 3332 | .80 | 1/2"x1/2" Openings | 52 |
| *3336 | .86 | 9/16"x9/16" Openings | |
| *3340 | .98 | 5/8"x5/8" Openings | |
| **TAPPET WRENCHES** | | | |
| 3400E | 5.38 | Set of 4 Wrenches in Kit | |
| 3425 | .93 | 7/16"x1/2" Openings | 57 |
| 3426 | .93 | 1/2"x9/16" Openings | 57 |
| 3430 | .99 | 9/16"x5/8" Openings | 57 |
| 3435 | 1.27 | 11/16"x3/4" Openings | 57 |
| 3440 | 1.34 | 13/16"x7/8" Openings | 57 |
| **FLARE NUT WRENCHES** | | | |
| 3712 | .77 | 3/8" Opening | |
| 3714 | .83 | 7/16" Opening | |
| 3716 | .90 | 1/2" Opening | 52 |
| 3718 | .96 | 9/16" Opening | 52 |
| 3720 | 1.00 | 5/8" Opening | 52 |
| *3722 | 1.08 | 11/16" Opening | |
| 3724 | 1.14 | 3/4" Opening | 52 |
| 3728 | 1.27 | 7/8" Opening | 52 |
| 3730 | 1.32 | 15/16" Opening | 52 |
| 3732 | 1.39 | 1" Opening | 52 |
| 3734 | 1.45 | 1 1/16" Opening | 52 |
| 3736 | 1.50 | 1 1/8" Opening | 52 |
| **PULLER SETS AND PARTS** | | | |
| 4000AA | 70.29 | Master Puller Set | |
| 4001 | 11.25 | Wheel Puller Set | 76 |
| 4001A | 13.29 | Wheel Puller Set | 76 |
| 4001B | 3.12 | Puller Body Only | 76 |
| 4001C | .51 | Ford Adapter Cap Screw | 76 |
| 4001J | 1.23 | Puller Leg | 76 |
| 4001JT | 1.23 | Puller Leg | 76 |
| 4001R | 1.35 | Ford Adapter Ring | 76 |
| 4001S | 2.07 | Puller Screw | 76 |
| :4001T | 2.04 | Puller Set Box | 76 |
| 4010A | 17.40 | Heavy-Duty Puller Set | 75 |
| 4010B | 15.33 | Heavy-Duty Puller Set | 75 |
| 4011 | 3.57 | Puller Cross Arm | 75 |
| 4012 | 2.52 | Puller Screw | 75 |
| 4015 | 2.28 | Puller Jaw | 75 |
| 4016 | 2.34 | Puller Jaw | 75 |
| 4017 | 2.34 | Timing Gear Jaw | 75 |
| 4018 | 2.34 | Cap Screw Jaw | 75 |
| :4019 | 2.07 | Puller Set Box | 75 |
| 4020A | 11.61 | Medium-Duty Puller Set | 75 |
| 4020B | 9.96 | Medium-Duty Puller Set | 75 |
| 4021 | 2.67 | Puller Cross Arm | 75 |
| 4022 | 1.17 | Puller Screw | 75 |
| 4025 | 1.50 | Puller Jaw | 75 |
| 4026 | 1.56 | Puller Jaw | 75 |
| :4029 | 1.65 | Puller Set Box | 75 |
| 4030A | 26.76 | Heavy-Duty Puller Set | 75 |
| 4030B | 24.69 | Heavy-Duty Puller Set | 75 |
| 4041 | 2.49 | Battery Terminal Puller | |
| 4050 | 5.70 | GM Pinion Puller Bar | |
| 4050B | 4.53 | Bar Only for 4050 | |
| 4050L | .39 | Large 4050 Fulcrum Plug | |
| 4050M | .39 | Medium 4050 Fulcrum Plug | |
| 4050S | .39 | Small 4050 Fulcrum Plug | |
| 4056 | 11.67 | Slide Hammer Puller Set | 73 |
| 4056C | 1.35 | Cap Screw Cross Arm, 6" | |
| 4056H | 2.28 | Sliding Hammer | 73 |

| Item No. | Net Price | Description | Cat. Page |
|---|---|---|---|
| 4056J | 1.11 | Reversible Jaw | 73 |
| 4056L | 1.23 | Inside Jaw, 4½" | 73 |
| 4056N | 1.89 | Adjusting Nut | 73 |
| 4056PN | .12 | Pin | 73 |
| 4056R | 1.98 | T-Handled Rod, 24" | 73 |
| 4056RS | 1.14 | Short Puller Rod | |
| 4056S | 1.41 | Single Jaw Puller | |
| 4056SJ | 5.67 | Single Jaw Puller Set | |
| 4060A | 7.80 | Light-Duty Puller Set | 74 |
| 4061 | 1.29 | Puller Cross Arm | 74 |
| 4063 | .42 | Adjusting Nut | 74 |
| 4066 | 1.23 | Puller Jaw | 74 |
| 4070C | 7.47 | Light-Duty Puller Set | 74 |
| 4071 | 1.83 | Puller Yoke | 74 |
| 4080 | 3.24 | Blind Bearing Puller | |
| 4080B | 1.80 | Body Only for 4080 | |
| 4080S | 1.44 | Screw Only for 4080 | |
| 4082 | 1.17 | Chevy Wheel Bolt Inserter | |
| 4515 | 2.64 | Stud Puller, ½" Drive | 56 |
| 4516 | .66 | Thk. Wedge for 4515 & 4520 | 56 |
| 4517 | .66 | Thin Wedge for 4515 & 4520 | 56 |
| 4532 | 5.10 | Stud Puller, ¾" Drive | 56 |
| 4533 | 1.02 | Thick Wedge for 4532 | 56 |
| 4534 | 1.02 | Thin Wedge for 4532 | 56 |

## ¼" DRIVE SOCKETS, ATTACHMENTS & SETS

| | | | |
|---|---|---|---|
| 4700A | 5.45 | Set in Metal Box | 27 |
| 4700AC | 4.83 | Set in Cardboard Box | 27 |
| 4700B | 8.51 | Set in Metal Box | 27 |
| 4700BC | 7.89 | Set in Cardboard Box | 27 |
| 4700F | 5.15 | Set in Metal Box | 24 |
| 4706 | .33 | Socket, 6-Pt., 3/16" Op. | 26 |
| 4707 | .33 | Socket, 7/32" Op. | 26 |
| 4708 | .33 | Socket, 6-Pt., ¼" Op. | 26 |
| 4708L | .51 | Deep Skt., 6-Pt., ¼" Op. | 26 |
| 4708S | .33 | Socket, 8-Pt., ¼" Op. | 26 |
| 4709 | .33 | Socket, 6-Pt., 9/32" Op. | 26 |
| 4709L | .51 | Deep Skt., 6-Pt., 9/32" Op. | 26 |
| 4710 | .33 | Socket, 6-Pt., 5/16" Op. | 26 |
| 4710L | .51 | Deep Skt., 6-Pt., 5/16" Op. | 26 |
| 4710S | .33 | Socket, 8-Pt., 5/16" Op. | 26 |
| 4711 | .33 | Socket, 6-Pt., 11/32" Op. | 26 |
| 4711L | .51 | Deep Skt., 6-Pt., 11/32" Op. | 26 |
| 4712 | .33 | Socket, 6-Pt., 3/8" Op. | 26 |
| 4712L | .51 | Deep Skt., 6-Pt., 3/8" Op. | 26 |
| 4714 | .33 | Socket, 6-Pt., 7/16" Op. | 26 |
| 4714L | .51 | Deep Skt., 6-Pt., 7/16" Op. | 26 |
| 4716 | .33 | Socket, 12-Pt., ½" Op. | 26 |
| 4737 | .81 | Phillips Socket, #1 Bit | 26 |
| 4738 | .81 | Phillips Socket, #2 Bit | 26 |
| 4744 | .81 | Screwdriver Skt., ¼" Bit. | 26 |
| 4745 | .87 | Screwdriver Skt., 3/8" Bit | 26 |
| *4746 | .81 | Screwdriver Skt., 5/16" Bit | 26 |
| *4747 | .87 | Screwdriver Skt., 5/32" Bit | 26 |
| 4749 | 3.06 | Reversible Ratchet, 4¾" | 25 |
| 4749C | .15 | Ratchet Cover | 25 |
| 4749DL | .22 | Ratchet Dog, Left | 25 |
| 4749DR | .22 | Ratchet Dog, Right | 25 |
| 4749H | .03 | Ratchet Cover Screw | 25 |
| 4749R | .31 | Ratchet Rev. Assembly | 25 |
| 4749S | .04 | Ratchet Spring | 25 |
| 4749W | .37 | Ratchet Wheel & Plug | 25 |
| 4760 | .68 | Extension, 3½" | 25 |
| 4761 | .81 | Extension, 6" | 25 |
| 4763 | 1.15 | Extension, 14" | 25 |
| 4766 | 1.34 | Hinge Handle, 5½" | 25 |
| 4766PH | .22 | Pin Handle, 4" | 25 |
| 4767 | .84 | Stub Handle, 2 5/32" | 25 |
| 4769 | .99 | Spintype Handle, 6" | 25 |
| 4770 | 1.68 | Universal Joint | 25 |
| 4780 | 1.68 | Speed Handle, 15¾" | 25 |
| 4785 | .87 | Sliding Bar, 4½" | 25 |
| :4795 | .62 | Socket Set Box | 19 |

## CROWFOOT WRENCHES, 3/8" DRIVE

| | | | |
|---|---|---|---|
| 4912 | .73 | 3/8" Opening | 29 |
| 4914 | .73 | 7/16" Opening | 29 |
| 4916 | .80 | ½" Opening | 29 |
| 4918 | .86 | 9/16" Opening | 29 |
| 4920 | .86 | 5/8" Opening | 29 |
| 4922 | .92 | 11/16" Opening | 29 |
| 4924 | .98 | ¾" Opening | 29 |
| 4926 | 1.07 | 13/16" Opening | 29 |
| 4928 | 1.07 | 7/8" Opening | 29 |
| 4932 | 1.13 | 1" Opening | 29 |
| 4940 | 1.59 | 1¼" Opening | 29 |
| 4944 | 1.77 | 1⅜" Opening | 29 |

## 3/8" DRIVE SOCKETS, ATTACHMENTS & SETS

| | | | |
|---|---|---|---|
| 5012 | .62 | Deep Skt., 12-Pt., 3/8" Op. | |
| 5014 | .62 | Deep Skt., 12-Pt., 7/16" Op. | 30 |
| 5016 | .62 | Deep Skt., 12-Pt., ½" Op. | 30 |
| 5018 | .66 | Deep Skt., 12-Pt., 9/16" Op. | 30 |
| 5020 | .66 | Deep Skt., 12-Pt., 5/8" Op. | 30 |
| 5022 | .72 | Deep Skt., 12-Pt., 11/16" Op. | |
| 5024 | .76 | Deep Skt., 12-Pt., ¾" Op. | |
| 5026 | .88 | Deep Skt., 12-Pt., 13/16" Op. | |
| 5028 | .94 | Deep Skt., 12-Pt., 7/8" Op. | |
| 5200AA | 15.38 | Set in Cardboard Box | |
| 5200AB | 17.62 | Set in Metal Box | |
| 5200N | 6.78 | Set in Cardboard Box | 31 |
| 5200NR | 10.73 | Set in Cardboard Box | 31 |
| 5200S | 9.02 | Set in Metal Box | 31 |
| 5200SR | 12.97 | Set in Metal Box | 31 |
| 5200UA | 14.27 | Universal Socket Set | |
| 5200UB | 15.89 | Universal Socket Set | |
| 5208S | .55 | Socket, 8-Pt., ¼" Op. | |
| 5210 | .49 | Socket, 12-Pt., 5/16" Op. | 30 |
| 5210S | .55 | Socket, 8-Pt., 5/16" Op. | |
| 5212 | .49 | Socket, 12-Pt., 3/8" Op. | 30 |
| 5212S | .55 | Socket, 8-Pt., 3/8" Op. | |
| 5214 | .49 | Socket, 12-Pt., 7/16" Op. | 30 |
| 5214S | .55 | Socket, 8-Pt., 7/16" Op. | |
| 5216 | .49 | Socket, 12-Pt., ½" Op. | 30 |
| 5216S | .55 | Socket, 8-Pt., ½" Op. | |
| 5218 | .49 | Socket, 12-Pt., 9/16" Op. | 30 |
| 5220 | .49 | Socket, 12-Pt., 5/8" Op. | 30 |
| *5221 | .52 | Socket, 12-Pt., 21/32" Op. | 30 |
| 5222 | .55 | Socket, 12-Pt., 11/16" Op. | 30 |
| 5224 | .55 | Socket, 12-Pt., ¾" Op. | 30 |
| 5239 | 1.07 | Chevy Oil Pan Screwdriver Skt., New Models | |
| 5241 | 1.23 | Phillips Socket, #2 Bit | 28 |
| 5242 | 1.23 | Phillips Socket, #3 Bit | 28 |
| 5243 | 1.23 | Phillips Socket, #4 Bit | 28 |
| *5244 | .60 | Screwdriver Skt., 11/16" Bit | |
| 5245 | 1.05 | Chevy Oil Pan Screwdriver Skt., Old Models | |
| 5246 | .81 | Screwdriver Skt, 7/16" Bit | 28 |
| 5249 | 3.95 | Reversible Ratchet, 7" | 28 |
| 5249C | .21 | Ratchet Cover | |
| 5249DL | .27 | Ratchet Dog, Left | |
| 5249DR | .27 | Ratchet Dog, Right | |
| 5249H | .03 | Ratchet Cover Screw | |
| 5249R | .36 | Ratchet Rev. Assembly | |
| 5249S | .04 | Ratchet Spring | |

| Item No. | Net Price | Description | Cat. Page |
|---|---|---|---|
| **3/8" DRIVE SOCKETS, ATTACHMENTS & SETS Continued** | | | |
| 5249W | .54 | Ratchet Wheel & Plug | |
| 5253 | .81 | Adapter, 3/8" F, 1/2" M | 33 |
| 5254 | .81 | Adapter, 1/2" F 3/8" M | 33 |
| 5255 | .81 | Adapter, 3/8" F, 1/4" M | |
| 5259 | .60 | Extension, 1 3/4" | 29 |
| 5260 | .92 | Extension, 3 1/2" | 29 |
| 5261 | .96 | Extension, 7 1/2" | 29 |
| 5262 | 1.08 | Extension, 12" | 29 |
| 5263 | 1.44 | Extension, 18" | 29 |
| 5265 | 2.31 | Hinge Handle, 7 3/8" | 28 |
| 5266 | 2.49 | Hinge Handle, 12" | |
| 5266PH | .30 | Pin Handle, 7 1/2" | 28 |
| 5270 | 1.95 | Universal Joint | 28 |
| 5272 | 2.16 | Univ.Skt.,12-Pt.,13/16"Op. | |
| 5273 | 1.99 | Univ.Skt.,12-Pt.,3/8"Op. | 30 |
| 5274 | 1.99 | Univ.Skt.,12-Pt.,7/16"Op. | 30 |
| 5275 | 1.99 | Univ.Skt.,12-Pt.,1/2"Op. | 30 |
| 5276 | 1.99 | Univ.Skt.,12-Pt.,9/16"Op. | 30 |
| 5277 | 1.99 | Univ.Skt.,12-Pt.,5/8"Op. | 30 |
| 5278 | 2.16 | Univ.Skt.,12-Pt.,11/16"Op. | 30 |
| 5279 | 2.16 | Univ.Skt.,12-Pt.,3/4"Op. | 30 |
| 5280 | 1.62 | Speed Handle, 18" | 29 |
| 5281 | 1.50 | Speed Handle, 14" | 29 |
| 5283 | 2.10 | Speed Handle, 30" | |
| 5285 | 1.23 | Sliding Bar, 8" | 28 |
| :5295 | 2.24 | Socket Set Box | 18 |
| :5296 | 2.99 | Box and Socket Rack | |
| :5297 | .75 | Socket Rack | 17 |
| **1/2" DRIVE SOCKETS, ATTACHMENTS & SETS** | | | |
| 5300PH | .22 | Pin Handle | |
| 5340 | .94 | DeepSkt.,12-Pt.,1/2"Op. | 34 |
| 5341 | .94 | DeepSkt.,12-Pt.,9/16"Op. | 34 |
| 5343 | 1.01 | DeepSkt.,12-Pt.,5/8"Op. | 34 |
| 5344 | 1.01 | DeepSkt.,12-Pt.,11/16"Op. | 34 |
| 5345 | 1.01 | DeepSkt.,12-Pt.,3/4"Op. | 34 |
| 5347 | 1.07 | DeepSkt.,12-Pt.,13/16"Op. | 34 |
| 5348 | 1.07 | DeepSkt.,12-Pt.,7/8"Op. | 34 |
| 5349 | 1.20 | DeepSkt.,12-Pt.,15/16"Op. | 34 |
| 5351 | 1.28 | DeepSkt.,12-Pt.,1"Op. | 34 |
| 5352 | 1.38 | DeepSkt.,12-Pt.,1 1/16"Op. | 34 |
| 5353 | 1.50 | DeepSkt.,12-Pt.,1 1/8"Op. | 34 |
| 5400AA | 21.92 | Set in Cardboard Box | |
| 5400AB | 24.89 | Set in Metal Box | |
| 5400N | 11.03 | Set in Cardboard Box | 31 |
| 5400NR | 16.28 | Set in Cardboard Box | 31 |
| 5400S | 14.00 | Set in Metal Box | 31 |
| 5400SR | 19.25 | Set in Metal Box | 31 |
| 5401 | 11.96 | TorqueWrench,50-FtLb | 32 |
| 5402 | 12.58 | TorqueWrench,100-FtLb | 32 |
| 5403 | 15.75 | TorqueWrench,150-FtLb | 32 |
| 5405 | 19.36 | Spring Tester | |
| 5412S | .61 | Socket, 8-Pt., 3/8" Op. | 34 |
| 5414 | .55 | Socket, 12-Pt., 7/16" Op. | 34 |
| 5414S | .61 | Socket, 8-Pt., 7/16" Op. | 34 |
| 5416 | .55 | Socket, 12-Pt., 1/2" Op. | 34 |
| 5416S | .61 | Socket, 8-Pt., 1/2" Op. | 34 |
| 5418 | .55 | Socket, 12-Pt., 9/16" Op. | 34 |
| 5418S | .67 | Socket, 8-Pt., 9/16" Op. | 34 |
| 5419 | .55 | Socket, 12-Pt., 19/32" Op. | 34 |
| 5420 | .55 | Socket, 12 Pt., 5/8" Op. | 34 |
| 5420S | .67 | Socket, 8-Pt., 5/8" Op. | 34 |
| 5421 | .64 | Socket, 12-Pt., 21/32" Op. | 34 |
| 5422 | .64 | Socket, 12-Pt., 11/16" Op. | 34 |
| 5422S | .73 | Socket, 8-Pt., 11/16" Op. | 34 |
| 5424 | .70 | Socket, 12-Pt., 3/4" Op. | 34 |
| 5424S | .80 | Socket, 8-Pt., 3/4" Op. | 34 |
| 5425 | .70 | Socket, 12-Pt., 25/32" Op. | 34 |
| 5426 | .70 | Socket, 12-Pt., 13/16" Op. | 34 |
| 5426S | .89 | Socket, 8-Pt., 13/16" Op. | 34 |
| 5428 | .76 | Socket, 12-Pt., 7/8" Op. | 34 |
| 5428S | .92 | Socket, 8-Pt., 7/8" Op. | 34 |
| 5429 | .83 | Socket, 12-Pt., 29/32" Op. | 34 |
| 5430 | .83 | Socket, 12-Pt., 15/16" Op. | 34 |
| 5431 | .83 | Socket, 12-Pt., 31/32" Op. | 34 |
| 5432 | .83 | Socket, 12-Pt., 1" Op. | 34 |
| 5432S | .98 | Socket, 8-Pt., 1" Op. | 34 |
| 5434 | .92 | Socket, 12-Pt., 1 1/16" Op. | 34 |
| 5436 | 1.07 | Socket, 12-Pt., 1 1/8" Op. | 34 |
| 5438 | 1.13 | Socket, 12-Pt., 1 3/16" Op. | 34 |
| 5440 | 1.19 | Socket, 12-Pt., 1 1/4" Op. | 34 |
| 5444 | .89 | Screwdriver Skt., 3/4" Bit. | 33 |
| 5446 | .92 | Screwdriver Skt., 1" Bit. | 33 |
| 5447 | 4.45 | Ratcheting Attachment | |
| 5449 | 5.25 | Reversible Ratchet, 10 1/4" | 32 |
| 5449C | .29 | Ratchet Cover | 32 |
| 5449DL | .29 | Ratchet Dog, Left | 32 |
| 5449DR | .29 | Ratchet Dog, Right | 32 |
| 5449H | .03 | Ratchet Cover Screw | 32 |
| 5449R | .44 | Ratchet Rev. Assembly | 32 |
| 5449S | .04 | Ratchet Spring | 32 |
| 5449W | .76 | Ratchet Wheel & Plug | 32 |
| 5450 | 5.88 | Reversible Ratchet, 16" | |
| 5453 | 1.18 | Adapter, 3/4" F, 1/2" M | 33 |
| 5460 | 1.00 | Extension, 2 1/2" | 33 |
| 5461 | 1.00 | Extension, 5" | 33 |
| 5463 | 1.37 | Extension, 10" | 33 |
| 5464 | 2.07 | Extension, 18" | 33 |
| 5466 | 3.31 | Hinge Handle, 9 1/2" | 32 |
| 5466PH | .35 | Pin Handle, 11 1/2" | 32 |
| 5467 | 3.37 | Hinge Handle, 15" | 32 |
| 5468 | 3.43 | Hinge Handle, 18" | 32 |
| 5469 | 3.94 | Speed Hinge Handle, 16" | 33 |
| 5470 | 2.04 | Universal Joint | 33 |
| 5475 | 2.10 | Univ.Skt.,12-Pt.,1/2"Op. | 34 |
| 5476 | 2.10 | Univ.Skt.,12-Pt.,9/16"Op. | 34 |
| 5477 | 2.10 | Univ.Skt.,12-Pt.,5/8"Op. | 34 |
| 5480 | 2.23 | Speed Handle, 18" | 33 |
| 5485 | 1.62 | Sliding Bar, 14" | 32 |
| 5486 | 1.53 | L-Handle, 14" | 32 |
| :5495 | 2.97 | Socket Set Box | 18 |
| :5496 | 3.73 | Box and Socket Rack | |
| :5497 | .76 | Socket Rack | 17 |
| **3/4" DRIVE SOCKETS, ATTACHMENTS & SETS** | | | |
| 5500N | 25.23 | Set in Metal Box | 37 |
| 5500NR | 37.26 | Set in Metal Box | 37 |
| 5528 | .94 | Socket, 12-Pt., 7/8" Op. | 36 |
| 5530 | 1.00 | Socket, 12-Pt., 15/16" Op. | 36 |
| 5532 | 1.00 | Socket, 12-Pt., 1" Op. | 36 |
| 5534 | 1.14 | Socket, 12-Pt., 1 1/16" Op. | 36 |
| 5536 | 1.21 | Socket, 12-Pt., 1 1/8" Op. | 36 |
| 5538 | 1.28 | Socket, 12-Pt., 1 3/16" Op. | 36 |
| 5540 | 1.34 | Socket, 12-Pt., 1 1/4" Op. | 36 |
| 5542 | 1.41 | Socket, 12-Pt., 1 5/16" Op. | 36 |
| 5544 | 1.54 | Socket, 12-Pt., 1 3/8" Op. | 36 |
| 5546 | 1.68 | Socket, 12-Pt., 1 7/16" Op. | 36 |
| 5548 | 2.35 | Socket, 12-Pt., 1 1/2" Op. | 36 |
| 5550 | 2.42 | Socket, 12-Pt., 1 9/16" Op. | 36 |
| 5552 | 2.49 | Socket, 12-Pt., 1 5/8" Op. | 36 |
| 5554 | 2.62 | Socket, 12-Pt., 1 11/16" Op. | 36 |
| 5556 | 2.69 | Socket, 12-Pt., 1 3/4" Op. | 36 |
| 5558 | 2.82 | Socket, 12-Pt., 1 13/16" Op. | 36 |
| 5560 | 3.02 | Socket, 12-Pt., 1 7/8" Op. | 36 |

| Item No. | Net Price | Description | Cat. Page |
|---|---|---|---|
| 5564 | 3.36 | Socket, 12-Pt., 2" Op. | 36 |
| 5568 | 3.96 | Socket, 12-Pt., 2 1/8" Op. | 36 |
| 5572 | 5.71 | Socket, 12-Pt., 2 1/4" Op. | 36 |
| 5576 | 7.06 | Socket, 12-Pt., 2 3/8" Op. | 36 |
| 5649 | 12.03 | Reversible Ratchet, 20" | 35 |
| 5649C | .74 | Ratchet Cover | 35 |
| 5649DL | .60 | Ratchet Dog, Left | 35 |
| 5649DR | .60 | Ratchet Dog, Right | 35 |
| 5649H | .04 | Ratchet Cover Screw | 35 |
| 5649R | .81 | Ratchet Rev. Assembly | 35 |
| 5649S | .07 | Ratchet Spring | 35 |
| 5649W | 1.65 | Ratchet Wheel & Plug | 35 |
| 5653 | 1.14 | Adapter, 1/2" F, 3/4" M | 36 |
| 5660 | 2.02 | Extension, 5" | 35 |
| 5661 | 2.22 | Extension, 8" | 35 |
| 5663 | 2.76 | Extension, 16" | 35 |
| 5668 | 6.65 | Hinge Handle, 22" | 35 |
| 5668PH | .54 | Pin Handle, 12" | 35 |
| 5670 | 5.71 | Universal Joint | 36 |
| 5685 | 3.16 | Sliding Bar, 18" | 35 |
| 5686 | 2.62 | L-Handle, 17" | 35 |
| :5695 | 5.54 | Socket Set Box | 18 |
| **1" DRIVE SOCKETS, ATTACHMENTS & SET** | | | |
| :5700AA | 134.44 | Set in Metal Box | |
| :5752 | 2.77 | Socket, 12-Pt., 1 5/8" Op. | 39 |
| *:5754 | 3.10 | Socket, 12 Pt., 1 11/16" Op. | 39 |
| :5758 | 3.56 | Socket, 12-Pt., 1 13/16" Op. | 39 |
| :5760 | 4.09 | Socket, 12-Pt., 1 7/8" Op. | 39 |
| :5764 | 4.36 | Socket, 12-Pt., 2" Op. | 39 |
| :5770 | 5.68 | Socket, 12-Pt., 2 3/16" Op. | 39 |
| :5772 | 6.07 | Socket, 12-Pt., 2 1/4" Op. | 39 |
| :5776 | 7.26 | Socket, 12-Pt., 2 3/8" Op. | 39 |
| :5780 | 8.71 | Socket, 12-Pt., 2 1/2" Op. | 39 |
| :5782 | 9.44 | Socket, 12-Pt., 2 9/16" Op. | 39 |
| :5784 | 10.56 | Socket, 12-Pt., 2 5/8" Op. | 39 |
| :5788 | 11.88 | Socket, 12-Pt., 2 3/4" Op. | 39 |
| :5794 | 15.84 | Socket, 12-Pt., 2 15/16" Op. | 39 |
| :5800 | 19.14 | Socket, 12-Pt., 3 1/8" Op. | 39 |
| :5812 | 23.76 | Socket, 12-Pt., 3 1/2" Op. | 39 |
| :5848 | 24.35 | Female Rev. Ratchet, 26" | 38 |
| :5848C | 1.65 | Ratchet Cover | 38 |
| :5848DL | .99 | Ratchet Dog, Left | 38 |
| :5848DR | .99 | Ratchet Dog, Right | 38 |
| :5848H | .07 | Ratchet Cover Screw | 38 |
| :5848R | 1.65 | Ratchet Rev. Assembly | 38 |
| :5848S | .13 | Ratchet Spring | 38 |
| :5848W | 3.62 | Ratchet Female Wheel | 38 |
| :5849 | 26.66 | Rev. Ratchet Complete, 26" | 38 |
| :5852 | 2.31 | Drive Plug for 5848W | 38 |
| :5853 | 2.31 | Adapter, 3/4" F, 1" M | 39 |
| :5854 | 2.64 | Adapter, 1" F, 3/4" M | 39 |
| :5861 | 4.09 | Extension, 8" | 39 |
| :5863 | 5.28 | Extension, 18" | 39 |
| :5868 | 19.34 | Hinge Handle, 26" | 39 |
| :5884 | 1.98 | Bar, 24" | 39 |
| :5885 | 2.64 | Drive Plug for 5884 | 39 |
| :5894 | 9.90 | Socket Set Box | 18 |
| **ENGINE TOOLS** | | | |
| 6522 | 1.29 | Cad. Con. Rod Nut Socket, 1/2" Dr., 6-Pt., 7/16" Op. | |
| 6523 | .72 | V8 Con. Rod Nut Socket, 1/2" Dr., 6-Pt., 9/16" Op. | 59 |
| 6526 | 1.02 | Carburetor Jet Wrench | |
| 6528 | .90 | Carburetor Jet Wrench | 59 |
| 6539 | 2.79 | V8-85 Valve Lifter | 59 |
| 6545 | 2.58 | Ford Drag Link and Shock Arm Tool | |
| *6546 | 3.00 | Pitman Arm Pulling Bar | |
| 6601 | 1.47 | Starter Wrench, 5/8" Op. | |
| 6734 | 1.98 | Chevy Valve Adjuster | 59 |
| 6734S | .78 | Extra Blade for 6734 | |
| **POWER TOOL EXTENSIONS** | | | |
| 7121 | 1.44 | 1/2" Sq. x 7/16" Hex., 2 3/4". | |
| 7123 | 1.68 | 1/2" Sq. x 7/16" Hex., 5" | |
| 7125 | 1.98 | 1/2" Sq. x 7/16" Hex., 8" | |
| 7127 | 2.40 | 1/2" Sq. x 7/16" Hex., 12" | |
| 7128 | 3.00 | 1/2" Sq. x 7/16" Hex., 18" | |
| **3/8" DRIVE POWER SOCKETS & ATTACHMENTS** | | | |
| 7212H | .50 | Socket, 6-Pt., 3/8" Op. | |
| 7214H | .50 | Socket, 6-Pt., 7/16" Op. | |
| 7216H | .50 | Socket, 6-Pt., 1/2" Op. | |
| 7218H | .50 | Socket, 6-Pt., 9/16" Op. | |
| 7220H | .54 | Socket, 6-Pt., 5/8" Op. | |
| 7222H | .60 | Socket, 6-Pt., 11/16" Op. | |
| 7224H | .60 | Socket, 6-Pt., 3/4" Op. | |
| 7270 | 2.10 | Universal Joint | |
| **1/2" DRIVE POWER SOCKETS & ATTACHMENTS** | | | |
| 7316H | 1.20 | Deep Skt., 6-Pt., 1/2" Op. | |
| 7318H | 1.20 | Deep Skt., 6-Pt., 9/16" Op. | |
| 7320H | 1.44 | Deep Skt., 6-Pt., 5/8" Op. | |
| 7322H | 1.44 | Deep Skt., 6-Pt., 11/16" Op. | |
| 7324H | 1.44 | Deep Skt., 6-Pt., 3/4" Op. | |
| 7326H | 1.50 | Deep Skt., 6-Pt., 13/16" Op. | |
| 7328H | 1.50 | Deep Skt., 6-Pt., 7/8" Op. | |
| 7414H | .66 | Socket, 6-Pt., 7/16" Op. | |
| 7416H | .66 | Socket, 6-Pt., 1/2" Op. | |
| 7418H | .66 | Socket, 6-Pt., 9/16" Op. | |
| 7420H | .66 | Socket, 6-Pt., 5/8" Op. | |
| 7422H | .72 | Socket, 6-Pt., 11/16" Op. | |
| 7424H | .72 | Socket, 6-Pt., 3/4" Op. | |
| 7426H | .84 | Socket, 6-Pt., 13/16" Op. | |
| 7428H | .84 | Socket, 6-Pt., 7/8" Op. | |
| 7430H | .90 | Socket, 6-Pt., 15/16" Op. | |
| 7432H | 1.08 | Socket, 6-Pt., 1" Op. | |
| 7434H | 1.14 | Socket, 6-Pt., 1 1/16" Op. | |
| 7436H | 1.20 | Socket, 6-Pt., 1 1/8" Op. | |
| 7440H | 1.32 | Socket, 6-Pt., 1 1/4" Op. | |
| 7470 | 2.16 | Universal Joint | |
| 7474H | 2.34 | Univ. Skt., 6-Pt., 7/16" Op. | |
| 7475H | 2.34 | Univ. Skt., 6-Pt., 1/2" Op. | |
| 7476H | 2.34 | Univ. Skt., 6-Pt., 9/16" Op. | |
| 7477H | 2.34 | Univ. Skt., 6-Pt., 5/8" Op. | |
| 7478H | 2.64 | Univ. Skt., 6-Pt., 11/16" Op. | |
| 7479H | 2.64 | Univ. Skt., 6-Pt., 3/4" Op. | |
| **3/4" DRIVE IMPACT SOCKETS** | | | |
| :07512 | 2.40 | Socket, 6-Pt., 3/4" Op. | 40 |
| :07513 | 2.40 | Socket, 6-Pt., 13/16" Op. | 40 |
| :07514 | 2.52 | Socket, 6-Pt., 7/8" Op. | 40 |
| :07515 | 2.64 | Socket, 6-Pt., 15/16" Op. | 40 |
| :07516 | 2.76 | Socket, 6-Pt., 1" Op. | 40 |
| :07517 | 2.76 | Socket, 6-Pt., 1 1/16" Op. | 40 |
| :07518 | 2.88 | Socket, 6-Pt., 1 1/8" Op. | 40 |
| :07520 | 3.00 | Socket, 6-Pt., 1 1/4" Op. | 40 |
| :07521 | 3.24 | Socket, 6-Pt., 1 5/16" Op. | 40 |
| :07523 | 3.36 | Socket, 6-Pt., 1 7/16" Op. | 40 |
| **1" DRIVE IMPACT SOCKETS** | | | |
| :10018 | 3.00 | Socket, 6-Pt., 1 1/8" Op. | 40 |
| :10018S | 3.12 | Socket, 8-Pt., 1 1/8" Op. | 40 |
| :10020 | 3.12 | Socket, 6-Pt., 1 1/4" Op. | 40 |
| :10020S | 3.24 | Socket, 8-Pt., 1 1/4" Op. | 40 |
| :10021 | 3.36 | Socket, 6-Pt., 1 5/16" Op. | 40 |
| :10021S | 3.48 | Socket, 8-Pt., 1 5/16" Op. | 40 |
| :10023 | 3.48 | Socket, 6-Pt., 1 7/16" Op. | 40 |
| :10023S | 3.72 | Socket, 8-Pt., 1 7/16" Op. | 40 |

| Item No. | Net Price | Description | Cat. Page |
|---|---|---|---|
| **1" DRIVE IMPACT SOCKETS—Continued** | | | |
| :10024 | 3.96 | Socket, 6-Pt., 1½" Op. | 40 |
| :10026 | 4.44 | Socket, 6-Pt., 1⅝" Op. | 40 |
| :10027 | 4.56 | Socket, 6-Pt., 1 11/16" Op. | 40 |
| :10029 | 4.68 | Socket, 6-Pt., 1 13/16" Op. | 40 |
| :10030 | 5.04 | Socket, 6-Pt., 1⅞" Op. | 40 |
| :10032 | 5.28 | Socket, 6-Pt., 2" Op. | 40 |
| :10033 | 6.36 | Socket, 6-Pt., 2 1/16" Op. | 40 |
| :10035 | 6.90 | Socket, 6-Pt., 2 3/16" Op. | 40 |
| **OFFSET BOX WRENCHES** | | | |
| 8160 | .78 | Short, 12-Pt., 3/8" x 7/16" Op. | 48 |
| 8161 | .84 | Short, 12-Pt., ½" x 9/16" Op. | 48 |
| 8162 | .91 | Short, 12-Pt., ⅝" x 11/16" Op. | 48 |
| 8163 | .97 | Short, 12-Pt., ¾" x 13/16" Op. | 48 |
| 8180 | .88 | Long, 12-Pt., 3/8" x 7/16" Op. | 48 |
| 8181 | .97 | Long, 12-Pt., ½" x 9/16" Op. | 48 |
| 8182 | 1.13 | Long, 12-Pt., ⅝" x 11/16" Op. | 48 |
| 8183 | 1.23 | Long, 12-Pt., ¾" x 25/32" Op. | 48 |
| 8184 | 1.52 | Long, 12-Pt., 13/16" x ⅞" Op. | 48 |
| 8185 | 1.78 | Long, 12-Pt., 15/16" x 1" Op. | 48 |
| **SCREW AND PIPE EXTRACTORS** | | | |
| 9500A | 4.86 | Set of 5 Extractors | 57 |
| 9521 | .66 | 1/8" Drill Size | 57 |
| 9522 | .78 | 3/16" Drill Size | 57 |
| 9523 | 1.02 | 15/64" Drill Size | 57 |
| 9524 | 1.14 | 5/16" Drill Size | 57 |
| 9525 | 1.26 | 13/32" Drill Size | 57 |
| 9526 | 1.80 | 9/16" Drill Size | 57 |
| 9527 | 1.92 | ½" Pipe Size | 57 |
| 9528 | 2.10 | ¾" Pipe Size | 57 |
| 9529 | 3.00 | 1" Pipe Size | 57 |
| **PLASTIC HANDLE SCREWDRIVERS** | | | |
| 9604 | .96 | Rd., 8" Overall, 9/32" Bit | 64 |
| 9606 | 1.20 | Rd., 10½" Overall, 11/32" Bit | 64 |
| 9608 | 1.50 | Rd., 13" Overall, 13/32" Bit | 64 |
| 9622 | .48 | Rd., 5¼" Overall, 1/8" Bit | 64 |
| 9624 | .54 | Rd., 7¼" Overall, 1/8" Bit | 64 |
| 9632 | .66 | Rd., 7½" Overall, 3/16" Bit | 64 |
| 9633 | .72 | Rd., 11" Overall, 3/16" Bit | 64 |
| 9638 | .90 | Rd., 17" Overall, 3/16" Bit | 64 |
| 9642 | 1.14 | Rd., 13" Overall, 9/32" Bit | 64 |
| 9643 | 1.38 | Rd., 14½" Overall, 11/32" Bit | 64 |
| 9651 | .54 | Sq., 2⅞" Overall, 9/32" Bit | 64 |
| 9652 | .66 | Sq., 3⅞" Overall, 9/32" Bit | 64 |
| 9671 | .78 | Rd., 2 1/16", Phillips #2 Bit | 66 |
| 9682 | 1.02 | Rd., 6½", Phillips #1 Bit | 66 |
| 9684 | 1.14 | Rd., 8", Phillips #2 Bit | 66 |
| 9686 | 1.32 | Rd., 10½", Phillips #3 Bit | 66 |
| 9688 | 1.62 | Rd., 13", Phillips #4 Bit | 66 |
| **WOOD HANDLE SCREWDRIVERS** | | | |
| 9701 | .48 | Sq., 4¼" Overall, 7/32" Bit | 65 |
| 9702 | .60 | Sq., 6⅝" Overall, 7/32" Bit | 65 |
| 9704 | .78 | Sq., 9" Overall, 9/32" Bit | 65 |
| 9706 | 1.08 | Sq., 12⅛" Overall, 11/32" Bit | 65 |
| 9708 | 1.32 | Sq., 14 13/16" Overall, 13/32" Bit | 65 |
| 9710 | 1.44 | Sq., 16¾" Overall, 13/32" Bit | 65 |
| 9712 | 1.68 | Sq., 18¾" Overall, 13/32" Bit | 65 |
| 9714 | 2.22 | Sq., 22¾" Overall, 9/16" Bit | 65 |
| 9722 | .42 | Sq., 5¼" Overall, 1/8" Bit | 65 |
| 9724 | .48 | Sq., 7¼" Overall, 1/8" Bit | 65 |
| 9732 | .60 | Sq., 8⅞" Overall, 7/32" Bit | 65 |
| 9733 | .72 | Sq., 12⅜" Overall, 7/32" Bit | 65 |
| 9741 | .72 | Sq., 13⅛" Overall, 7/32" Bit | 65 |
| 9742 | .96 | Sq., 14½" Overall, 9/32" Bit | 65 |
| 9743 | 1.20 | Sq., 16⅛" Overall, 11/32" Bit | 65 |
| 9744 | 1.62 | Sq., 29 1/16" Overall, 9/32" Bit | |
| 9752 | 1.02 | Sq., 5¾" Overall, 11/32" Bit | 65 |
| 9782 | .66 | Rd., 6¼", Phillips #1 Bit | 66 |
| 9784 | .72 | Rd., 8⅞", Phillips #2 Bit | 66 |
| 9786 | .90 | Rd., 12", Phillips #3 Bit | 66 |
| 9788 | 1.20 | Rd., 14½", Phillips #4 Bit | 66 |
| **PLASTIC HANDLE SCREWDRIVERS** | | | |
| 9804 | .66 | Sq., 8" Overall, 9/32" Bit | 65 |
| 9806 | .90 | Sq., 10½" Overall, 11/32" Bit | 65 |
| 9808 | 1.38 | Sq., 13" Overall, 13/32" Bit | 65 |
| 9822 | .42 | Sq., 5¼" Overall, 1/8" Bit | 65 |
| 9832 | .60 | Sq., 7½" Overall, 7/32" Bit | 65 |
| 9833 | .66 | Sq., 11" Overall, 7/32" Bit | 65 |
| 9842 | .78 | Sq., 13" Overall, 9/32" Bit | 65 |
| 9843 | 1.02 | Sq., 14½" Overall, 11/32" Bit | 65 |
| **TOOL SETS** | | | |
| •9900A | 63.07 | Veterans Set, 60 Tools | |
| •9900B | 124.17 | Veterans Set, 110 Tools | |
| (If required that a Veterans Set be held within a $50 or $100 limit, the least needed tools for the type of work involved can be omitted.) | | | |
| 9900C | 3.46 | Leather Kit & 3 Tools | |
| 9900PL | 79.25 | Plumbers Set, 66 Tools | |
| 9980AA | 54.15 | Tool Chest & 42 Tools | |
| **TOOLMOBILES AND TOOL CHESTS** | | | |
| :9969-1 | 69.90 | Toolmobile with Rack | 15 |
| :9969-4 | 64.90 | Toolmobile less Rack | 15 |
| :9969-7 | 5.00 | Toolmobile Piston Rack | 15 |
| :9969-8A | .12 | Divider Strip, 5" Long | |
| :9969-8B | .33 | Divider Strip, 17⅜" Long | |
| :9969-8C | .41 | Divider Strip, 22½" Long | |
| :9980 | 8.34 | Chest, 22¼"x9"x6½" | 17 |
| :9989 | 11.42 | Chest, 20½"x11½"x9" | 17 |
| :9990 | 21.95 | Chest, 24½"x11¼"x12¾" | 16 |
| :9998 | 57.75 | Chest, 26½"x12"x20½" | 16 |
| **SLUGGING 12-POINT BOX WRENCHES** | | | |
| :USN221 | 5.70 | Short, 1 5/16" Opening | 43 |
| :USN223 | 5.85 | Short, 1 7/16" Opening | 43 |
| :USN224 | 6.00 | Short, 1½" Opening | 43 |
| :USN226 | 6.30 | Short, 1⅝" Opening | 43 |
| :USN227 | 6.72 | Short, 1 11/16" Opening | 43 |
| :USN229 | 7.11 | Short, 1 13/16" Opening | 43 |
| :USN230 | 7.50 | Short, 1⅞" Opening | 43 |
| :USN232 | 7.95 | Short, 2" Opening | 43 |
| :USN235 | 8.40 | Short, 2 3/16" Opening | 43 |
| :USN236 | 8.76 | Short, 2¼" Opening | 43 |
| :USN238 | 10.86 | Short, 2⅜" Opening | 43 |
| :USN241 | 11.34 | Short, 2 9/16" Opening | 43 |
| :USN242 | 12.15 | Short, 2⅝" Opening | 43 |
| :USN244 | 12.75 | Short, 2¾" Opening | 43 |
| :USN247 | 14.70 | Short, 2 15/16" Opening | 43 |
| :USN248 | 16.05 | Short, 3" Opening | 43 |
| :USN250 | 16.50 | Short, 3⅛" Opening | 43 |
| :USN254 | 20.70 | Short, 3⅜" Opening | 43 |
| :USN256 | 24.90 | Short, 3½" Opening | 43 |
| :USN326 | 9.93 | Long, 1⅝" Opening | 43 |
| :USN327 | 10.62 | Long, 1 11/16" Opening | 43 |
| :USN329 | 11.25 | Long, 1 13/16" Opening | 43 |
| :USN330 | 11.94 | Long, 1⅞" Opening | 43 |
| :USN332 | 12.60 | Long, 2" Opening | 43 |
| :USN335 | 13.26 | Long, 2 3/16" Opening | 43 |
| :USN336 | 13.92 | Long, 2¼" Opening | 43 |
| :USN338 | 17.25 | Long, 2⅜" Opening | 43 |
| :USN341 | 17.94 | Long, 2 9/16" Opening | 43 |
| :USN342 | 18.60 | Long, 2⅝" Opening | 43 |
| :USN344 | 19.26 | Long, 2¾" Opening | 43 |
| :USN348 | 23.25 | Long, 3" Opening | 43 |
| :USN350 | 23.94 | Long, 3⅛" Opening | 43 |
| :USN354 | 29.94 | Long, 3⅜" Opening | 43 |
| :USN356 | 30.60 | Long, 3½" Opening | 43 |